

Quasar®

DIAMOND GLOSS FLOOR FINISH

®

DATA TECH SHEET

PRODUCT DESCRIPTION:

Quasar® is a high solids, metal-crosslinked, water emulsion floor finish. Formulated for outstanding durability, Quasar® will outwear conventional finishes under the most demanding traffic and frequent scrubbing conditions. Excellent appearance levels may be achieved in a variety of maintenance programs. Use Quasar® on resilient surfaces and sealed wood.

FEATURES:

Durable:

Exceptional resistance to heel marking, scuffing and repeated scrubbing with detergents means that Quasar® outwears conventional finishes. Both stripping and recoating cycles are extended, lowering the frequency of these costly procedures.

High Solids Formula:

Maximum labor productivity is assured as you build gloss quickly, with fewer coats.

Superior Soil Resistance:

The tough film of Quasar® minimizes soil penetration and surface abrasion even under extreme conditions. Autoscrubbing easily picks up dirt, immediately restoring the shine.

Versatility:

Maintain Quasar® using many recognized methods, spray buff, top coat or scrub/recoat.

PRODUCT SPECIFICATIONS:

pH	9.0 ± 0.3
Appearance	Off White Emulsion
Fragrance	Mild polymeric
% Non-Volatile Solids	25.0 ± 0.5
% Total Solids	30.8
Freezing Point	About 32°F
Boiling Point	212°F
Solubility in Water	Dispersible
Flash Point	None
Coverage	2500-3000 sq. ft. per gallon
	(may vary due to differences in porosity of the surface)

Slip Resistance: Static coefficient of friction (James Machine) meets or exceeds 0.5 as determined by ASTM D2047-82.

INGREDIENTS:

Water	7732-18-5
Styrene acrylic polymers	Mixture
Diethylene glycol monoethyl ether	111-90-0
Tri-butoxyethyl phosphate	78-51-3
Polypropylene emulsion	Mixture
Oxidized polyethylene wax emulsion	68441-17-8

DILUTIONS	HEALTH	FLAMMABILITY	REACTIVITY
CONCENTRATE	NFPA 0	NFPA 0	NFPA 0
CONCENTRAR	HMIS 0	HMIS 0	HMIS 0
PROPORCIÓN	SALUD	INFLAMABILIDAD	REACTIVIDAD

0	1	2	3	4
Minimal	Slight	Moderate	Serious	Severe
Mínimo	Mínimo	Moderar	Grave	Drástico


Quasar® HIGH SOLIDS FLOOR FINISH

DIRECTIONS

USE INFORMATION

Recommended on all types of resilient and non-resilient floors which include vinyl composition, rubber, asphalt, quarry, terrazzo and sealed wood floors. NOTE: Old and very porous floors should be sealed with a Franklin sealer prior to application of Quasar®.

INITIAL APPLICATION

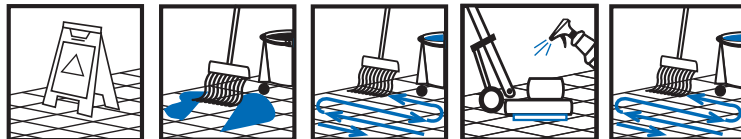

CAUTION


1. REMOVE

2. APPLY

3. DRY

4. APPLY

MAINTENANCE

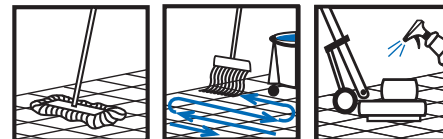

1. DUST MOP

2. Mop

3. BURNISH

INITIAL APPLICATION

1. **REMOVE** old sealer or finish using an appropriate Franklin stripper and following label directions.
2. **APPLY** a thin, even coat of **Quasar®** using a clean finish mop.
3. **DRY:** Allow 20 to 30 minutes of drying time.
4. **APPLY** 2-3 coats for best results allowing for adequate drying time between each coat.

MAINTENANCE

1. **DUST MOP** the floor. Remove gum, labels, and other attached soil deposits with a long-handled scraper or putty knife.
2. **DAMP MOP OR AUTOSCRUB** using a Franklin cleaner. Follow label directions for correct dilution and proper cleaning procedure.
3. **BURNISH** the floor using a soft hair pad and high speed floor machine to remove black scuff marks, scuffs and scrapes.



Floor Coating and Finishing Material
AS TO SLIP RESISTANCE ONLY 8P88

WARNING

May cause mild eye and skin irritation. Harmful to aquatic life.

Prevention

Avoid release to the environment.

Response

Wash hands after handling.

Storage

Store away from incompatible materials.

Disposal

Dispose of contents/container in accordance with local / regional / national / international regulations.

Franklin Cleaning Technology

One Fuller Way
Great Bend, KS 67530
United States
CHEMTREC (800) 424-9300
Emergency (620) 792-1711
24 hour Emergency (800) 424-9300
www.fullercommercial.com

PERSONAL PROTECTION:

Respiratory Protection: Not needed in normal use of this product.

Ventilation: Use with adequate ventilation.

Eye Protection: Safety glasses are recommended.

Protective Gloves: Protective gloves are recommended.

Other Protective Clothing or Equipment: Wear clothing as necessary to prevent skin contact.

TRANSPORTATION

INFORMATION:

U.S. DOT - Proper Shipping Name: Not regulated by DOT.

Marine Pollutant: No.