

## **SPECIFICATIONS**

• 5 stainless steel paddles to suit pipe diameter up-to 150mm

· Adjustable flow setting


Flow Temperature: 0-100°CElectric Load: AC250V 10A


• The Endurance of Bellows: 5,00,000 cycles

Max Working Pressure: 10Bar
Process Connection: 1" NPT M
Environment Temperature: 0-60°C

Pipe Diameter (mm)		25	32	40	50	65	80	100	125	150	200	100*	125*	150*	200*
Min. Adjust ment (m³/h)	Flow increase (red blue closed)	0.95	1.32	1.70	3.11	4.09	6.24	14.8	28.4	43.2	85.2	8.4	12.9	16.8	46.6
	Flow decrease (red yellow closed)	0.57	0.84	1.14	2.16	2.84	4.32	11.4	22.9	35.9	72.7	6.13	9.31	12.26	38.6
Max. Adjust ment (m3/h)	Flow increase (red blue closed)	2.0	3.02	4.36	6.6	7.84	12.0	29.1	55.6	85.2	172.6	13.4	26.8	32.7	94.26
	Flow decrease (red yellow closed)	1.93	2.84	4.09	6.13	7.23	11.4	27.7	53.4	81.8	165.8	17.3	25.21	30.66	90.85


## WIRING



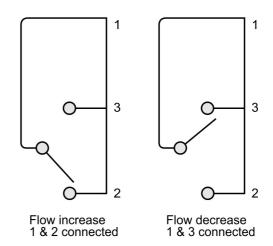

## **INSTALLATION**

- The arrow direction in the cover must be as same as the flow direction in the pipe.
- The flow switch is suggested to be installed on horizontal pipes, if it have to be on vertical pipes, then the direction in the pipe must be upward flow. It is not allowed to be installed on the vertical lines with downward flow.
- To avoid the paddle damage, flow reversal is not allowed when the flow switch is working.

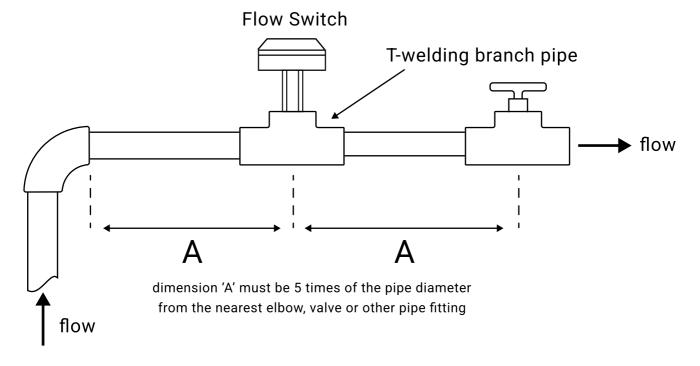



## **FUTURISTIC TECHNOLOGIES**

232, Sunrise Mall, Mansi Circle, Vastrapur, Ahmedabad, Gujarat 380015, INDIA

- **\** +91 6355915927
- www.futuristictechnologies.co.in