

Indoor Air Quality sensor Temperature / Humidity / CO₂ / PM2.5 / PM10 / TVOC

EXT-KA-SE200P provides real-time accurate measurements of IAQ to allow for increased credit from building certification (e.g. LEED, WELL, RESET). IAQ sensor comes with multiple power, connectivity, and installation options. EXT-KA-SE200P provides integration with Power over Ethernet (PoE)


Technical data

Electrical data	Nominal voltage	USB-C (5V 1.8A DC) / DC 12...30 V
	Power over Ethernet PoE	IEEE 802.3af (PoE), Type 1, Class3 IEEE 802.3at (PoE+), Type 2, Class3 PD maximum power ≤10 W PSEs: Midspan and endspan supported Cable: Cat5 (Cat5e, Cat6, and Cat6a)
	Connection wireless	2.4 GHz 802.11 b/g/n; security standards supported: 64/128 WEP, WPA-PSK, WPA2-PSK, WPA, WPA2 Personal
Data bus communication	Communication	Modbus RTU BACnet IP Local and cloud MQTT Open API Cloud
	Functional data	Coverage area
Measuring data	Measured values	CO ₂ TVOC PM2.5, PM10 Relative humidity Temperature
	Specification Particulate Matter	Mesurement range
Accuracy		±3 µg/m ³ (0 to 30 µg/m ³) ±10% m.v. (30...1000 µg/m ³)
Typical response time		≤10 s
Sensor output resolution		1 µg/m ³
Sensor technology		Laser particle sensor (light scattering)
Specification TVOC	Mesurement range	0...60000 ppb
	Accuracy	±15% ±8 ppb
	Typical startup time	0.4 ms
	Sensor output resolution	1 ppb
	Sensor technology	Multi-pixel metal oxide sensor (MOx)

Technical data

Specification CO₂	Mesurement range	400...2000 ppm Up to 10000 ppm extended range
	Accuracy	±3% m.v. ±50 ppm
	Typical response time	120 s by 90%
	Sensor output resolution	1 ppm
	Sensor technology	Non-dispersive infrared (NDIR)
Specification Temperature	Mesurement range	-20...100°C
	Accuracy	±1°C
	Long term drift	<0.03°C [0.054°F]/yr (under normal RH/T operating range)
	Typical response time	>2 s
	Sensor output resolution	0.01°C
Specification Humidity	Mesurement range	0...99% RH
	Accuracy	±5% RH
	Long term drift	<0.25% RH/yr
	Typical response time	>8 s (depends on the surrounding surface and the airflow in the final application environment)
	Sensor output resolution	0.01% RH
Safety data	EU Conformity	CE Marking
	Ambient humidity	Max. 95% RH, non-condensing
	Ambient temperature	0...50°C [32...122°F]

Product Features

Operating mode	<p>Temperature: Typical value for operation in normal RH/T operating range. Higher drift values may occur due to contaminant environments with vaporised solvents, out-gassing tapes, adhesives, packaging materials, etc. Temperature response times strongly depend on the type of heat exchange, the surrounding surface and the airflow in the final application environment.</p> <p>Humidity: Humidity response times strongly depend on the surrounding surface and the airflow in the final application environment.</p> <p>CO₂: Extended exposure to concentrations below 400 ppm may result in incorrect operation of ABC algorithm and should be avoided. Sensor provides readings in the extended range up to 10,000 ppm, but the accuracy may be lower than that specified in the table.</p>
PoE (Power over Ethernet)	Total length of cabling up to 100 m. However, we do not recommend using cables longer than 50 m to guarantee the stability of power and data transmission.
Target gas profile TVOC	<p>Complex mixture of 22 VOCs as defined by Molhave et al.</p> <p>n-Hexane, n-Nonane, n-Decane, n-Undecane, 1-Octane, 1-Decene, Cyclohexane, m-Xylene, Ethylbenzene, 1,2,4-Trimethylbenzene, n-Propylbenzene, a-Pinene, n-Pentanal, n-Hexanal, Iso-propanol, n-Butanol, 2-Butanone, 3-Methyl-3-butanone, 4-Methyl-2-pentanone, n-Butylacetate, Ethoxyethylacetate, 1, 2-Dichloroethane</p> <p>Sampling process Diffusion</p>
Data storage and logging	<p>Frequency of readings (log interval): 1 minute, 1 hour, 1 day</p> <p>Data push interval: 1 minute (customisable upon request)</p> <p>Onboard memory: 1 hour of data</p>

Product Features

Recommended lifetime of sensor unit	CO ₂ : 15 years Temperature: 10 years Humidity: 10 years Particulate matter: 1.3 years (>200 µg/m ³), 2 years (<100 µg/m ³)
Warranty and durability	Standard warranty: 2 years (excluding replaceable sensor module) Expected lifespan: 5 to 7 years

Remarks


General remarks concerning sensors	Calibration via hot-swappable sensor modules for sensor modules Particulate matter: Calibrated against standardised aerosol mix TVOC: Calibrated against ethanol
---	--

Indicators and Operation

**Complies with
IMDA Standards
DA107974**


Accessories

Electrical accessories	Description	Type
	Sensor module, PM2.5 PM10	EXT-KA-KM200
	Sensor module, TVOC	EXT-KA-KM203

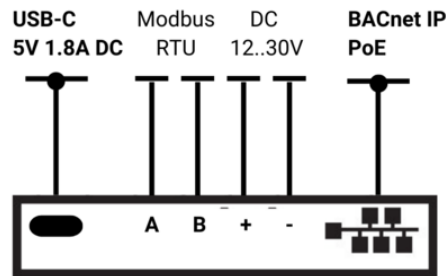Wiring diagram


Modbus RTU /BACnet IP / PoE

Dimensions

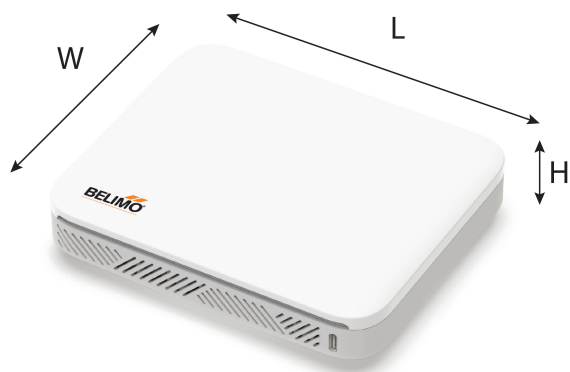

Type	L [mm]	W [mm]	H [mm]	 kg
EXT-KA-SE200P	155	129	34	0.37