



TeleSwivel Launches Mobile LED Light Towers

The Lind Equipment **Award Winning** Beacon LED Tower brings you all the light you've come to expect from traditional 4x1000W metal halide light towers, but in a completely unexpected package. **Compact, lightweight, and truly man-portable**, the Beacon LED Tower can be transported with ease without any compromise in durability and stability. **Direct drive high-efficiency LED lights** run whisper-quiet on any power source you choose: external or user supplied generator.

- **Operating costs of as little as \$0.10 / hour**
- State-of-the-art robust LED lighting - the tower is virtually maintenance free.
- Can be lifted into the back of a pick-up truck: **two towers fit in standard pick-up bed**
- Daisy chain multiple towers and tools
- Robust construction to withstand tough jobsite and emergency conditions
- Lay-flat models or in vertical mast models to fit any application.
- **2 Towers can run on a 15A circuit**




LE980LEDV-T4

Four Ultra Efficient LED Lights



LE980LED-T4

Four Ultra Efficient LED Lights

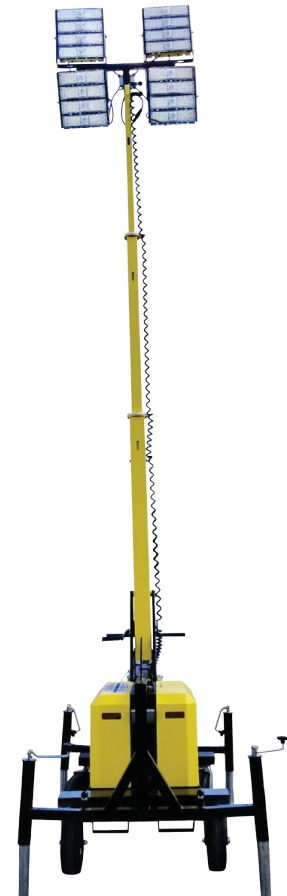

Available in Yellow or Black

<https://www.gsaadvantage.gov/advantage/s/search.do?q=0:2teleswivel+lind&db=0&searchType=0>

Dave Woolf

Tel: 919-623-2031

Email: dwoolf@teleswivel.com

Jeff Allen

Tel: 919-796-3298

Email: jallen@teleswivel.com

Made in the USA and Canada by:



Quiet; easy deployment; low maintenance; same light and runtime as traditional towers
AT ½ THE COST

SPECIFICATIONS		LE980LED-T4	LE980LEDV-T4
Description		Four-light Lay-FlatMast	Four-light VerticalMast
GSA Advantage® Price		\$4,939.00	\$4,939.00
Color Choice		Add '-B' for the black colour model, add nothing for yellow	
Lights	Power	800W	800W
	Amperage	6.7 Amps @120V	6.7 Amps @120V
	Lumens	120,000	120,000
	Voltage	90V-277V	
Ingress protection		IP65 Weatherproof	
Construction		Aluminum housing, polycarbonate lenses	
Rated hours		Over 50,000	
Approvals		cULus	
Mast	Max height	20'	17'
	Construction	Steel	
	Wind resistance	45 mph	
Chassis	Construction	Steel frame	
	Outriggers	Outriggers extend to 2' beyond frame	
	Tires	Foam-filled rubber tires	
	Features	Caster wheels • Side access forklift guides	
Dimensions (stowed)		L: 65" • W: 31" • H: 35" (mast down)	L: 52" • W: 39" (32" fully in) • H: 82"
Weight		350 lbs	380 lbs
Cabinet	Construction	Steel	
	Internal dimensions	L: 27" • W: 21" • H: 19.5"	
	Features	Lockable • Ventilated • On/off switch • Daisy-chain outlet	
Fuel Tank	Dimensions	L: 19.3" • W: 12.2" • H: 10.2"	
	Capacity	6 Gallons • 23 Litres	
Features		<ul style="list-style-type: none"> Comes complete with hose and fuel cap that will fit most popular suit- case generator models. Alternative cap sizes available - call Lind Removable auxiliary tank 	
Run time		Approx 45 hours on standard 2000W suitcase generator with auxiliary fuel tank	
Generator		Units do not come standard with a suitcase generator. Lind can also supply for additional cost.	

