

PFT RITMO L FC-230V plus – B 4-2

The new all-rounder for every challenge

No matter how compact the construction site, how demanding the renovation, how daring the schedule - with the new PFT mixing pump you will easily understand. You are also very flexible on your own, completely mobile - and in no time you will be the hero for your client.




TECHNICAL DATA

Part no.	00 65 95 04
Rotor/Stator	B 4-2
Working pressure	max. 20 bar
Conveying capacity	continuously adjustable up to 14 litres / min
Conveying distance	up to 20 m
Motor	230 V, 1 Ph, 50 Hz, 2.2 kW, 55 - 492 rpm
Connection cable	BLU 3-16 A BLU 2-16 A - 25 m
Spraying gun	DN25-360° S10 200 Ewo
Air compressor	COMP R-80, 230 V, 1 Ph, 50 Hz, 0.35 kW, 80 l / min
Material outflow	DN25 male part
Material hose	RONDO DN25 - 15 + 5 m
Air hose	DN9 Ewo Ewo - 16 + 5 m
Mixing tube	Rubber
Operation	Compressor: pressure control
Hopper content	45 litres
Dimensions: L/W/H	750 / 600 / 1,430 mm
Filling height	930 mm
Weight	~ 125 kg

Please note:

Standard values depending on mortar quality, mortar composition, mortar consistency, pump version, pump condition, material hose diameter and delivery height. Ultimately, the respective guidelines of the material manufacturer are decisive.

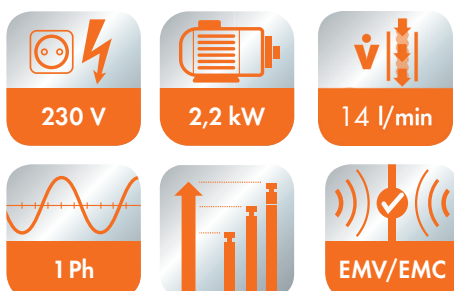

ADVANTAGES AT A GLANCE


		<p>1 Suitable for bucket and bag material</p> <p>2 Flow-optimized output</p> <p>2 Mortar pressure gauge integrated</p> <p>3 Rubber mixing zone for easy cleaning with adapter flange for A and B pump</p>
		<p>4 Easy dismantlable into single modules</p> <ul style="list-style-type: none"> - Motor with protection grille (a): 30 kg - Material hopper with pump unit (b): 28 kg - Chassis (c): 64 kg - Mixing shaft (d): 3 kg
		<p>4 In series equipped with external vibrator</p> <p>5 Flexible mixing intensity thanks to two water inlets</p> <p>6 Easy handling on start-up, retrofitting, maintenance and cleaning</p> <p>6 Foldable motor</p> <p>6 Circumferential sealing edge on the material container for accessories</p> <p>7 Transport is possible in any estate car</p> <ul style="list-style-type: none"> ■ Mounting position for Rotor/Stator mounting ■ Conical mixing tube for optimum material flow ■ Large insertion area ■ Runs powerfully and reliably with luminous flux ■ Extension hopper - for double volume <p>PFT praktische Tip Pump unit SD 6-3 slimline, 25 male part Part no. 00 65 17 79</p>

FIELDS OF APPLICATION

- Interior plaster
- Finishing coat
- Floor levelling compound
- Fine filler
- Adhesive / reinforcement mortar
- Fire protection mortar
- Grouting mortar

ACCESSORIES SPARE PARTS	PART NO.
■ Extension cable 3 x 2.5 mm ² , BLU 2-16 A - 25 m	20 42 34 20
■ Extension hopper for RITMO L plus	00 61 27 29
■ DUSTCATCHER for material hopper RITMO L plus	00 61 11 77
■ DUSTCATCHER for extension hopper RITMO L plus	00 61 98 34
■ Mixing shaft BIONIK RITMO L plus	00 58 42 02
■ Stator B 4-2	00 00 84 62
■ Rotor B 4-2	00 24 58 10

Further accessories and spare parts could be found at www.pft.net/plus



The PFT Service guarantee

Customer-friendliness, technical expertise and service-orientation. That's what the PFT brand with its sales and service centers worldwide stands for also in the coming decades.



Click. Discover. Experience.
www.pft.net/plus
www.youtube.com/knaufpft

Download now! APP: PFT - Plastering Technology

Knauf PFT GmbH & Co. KG

Einersheimer Str. 53 · DE-97346 Iphofen

Technical Hotline	+49 9323 31-1818
Phone	+49 9323 31-760
Fax	+49 9323 31-770
info@pft.net	www.pft.net

All rights reserved. Subject to change without prior notice. Our warranty refers only to the perfect condition of our machines. Consumption, quantity, design specifications and performance data are empirical values, which cannot be transferred automatically in case of deviating conditions. In addition, the guidelines of the material manufacturer are always applicable. Changes, reprints and photomechanical reproductions, even in parts, require the approval of Knauf PFT GmbH & Co. KG.

RITMO L plus - B 4-2 - EN/04.19/PFT