

OPTIONS

Flush Volume

- 1.6 gpf (6.0 Lpf) (1.6)
- 1.28 gpf (4.8 Lpf) (1.28)
- 1.1 gpf (4.2 Lpf) (1.1)

Finish

- Polished Chrome (CP)
- Polished Brass (PB)
- Brushed Nickel (BN)
- Brushed Stainless (SF)
- Graphite (GR)

Water Efficiency

- Low Consumption
- High Efficiency

Handle

- Front of Valve (H)
- Sanigard® (SG)
- Left of Valve (G)
- Nickel-Silver (YA)
- CuVerro
- Right of Valve (I)

Push Button

- Metal Index (L)
- 3" Metal Oscillating (L3)
- Front of Valve (HL3)

Control Stop

- 1" Straight (E)
- Wheel Handle (K)
- Ground Joint (GJ)
- Less (L/STOP)

Tailpiece

- H551A 3 1/16" (H551A-3-1/16)
- H551A 4 1/16" (H551A-4-1/16)
- H551A 5 1/16" (H551A-5-1/16)

Inlet

- Back of Valve (B)
- Left of Valve (C)

Vacuum Breaker

- Less (XYV)

Offset

- 1 ½" (38mm) (1-1/2-OFST)
- 1" (25mm) (1-OFST)

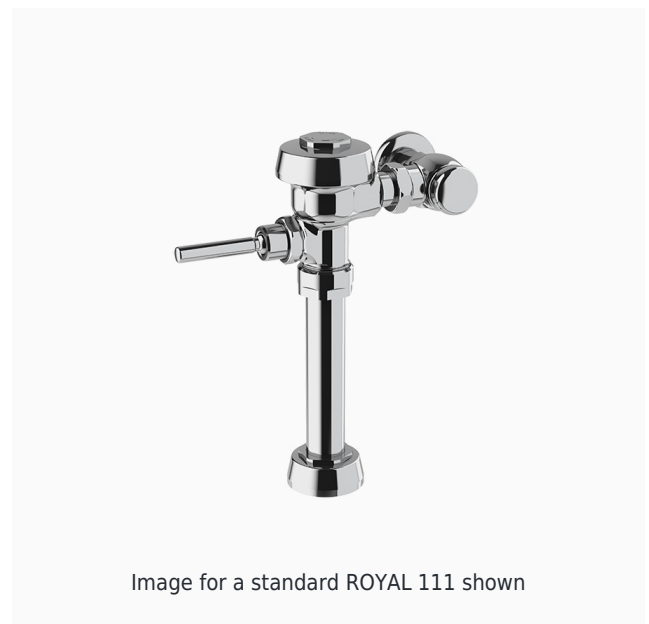


Image for a standard ROYAL 111 shown

DESCRIPTION

Royal® Exposed Manual Water Closet Flushometer

FEATURES

- Water conservation is aided by the ADA-compliant, non-hold-open handle, which prevents toilet from exceeding intended flush volume
- Flush accuracy is controlled by CID™ technology, also enhancing water efficiency
- Integrity of the product is maintained with the vandal-resistant stop cap
- Durability is facilitated with high copper, low zinc brass castings for dezincification resistance
- Adjustable tailpiece
- PERMEX synthetic rubber diaphragm with Dual Filtered Fixed Bypass
- Valve body, Cover, Tailpiece and Control Stop shall be in compliance with ASTM Alloy Classification for Semi-Red Brass
- Valve shall be in compliance to the applicable sections of ASSE 1037.

DOWNLOADS

- [Royal Exposed Installation Instructions](#)
- [Control Stop Repair and Maintenance Guide](#)
- [Flush Connections Flanges Repair and Maintenance Guide](#)
- [Tail Piece Repair and Maintenance Guide](#)
- [Royal Manual Diaphragm Flushometer Repair and Maintenance Guide](#)
- [Tools/Accessories](#)
- [Flushometer Pressure gauges](#)
- [Additional Downloads](#)

Sloan 10500 Seymour Ave, Franklin Park, IL 60131

Phone: 800.982.5839 • Fax: 800.447.8329 • sloan.com

Outlet Tube

Trap Primer (TP)
F189 (F189)
F188 (F188)

Adapter

Cast Set Screw Wall Flange (YBC)

Bumper

Angle Stop (YO)
Angle Stop Extended (YG)

Pipe Support

Solid Ring (YK)

Special Features

Less Logo (LL)
Carbon Offset (CO)
Whitworth Thread (WWT)

Compliances & Certifications

BAA Compliant
cUPC Certified
Made in the USA
ADA Compliant
Satisfies LEED Credits
cUPC Green Certified
WaterSense Listed
BREEAM Water Credit
Green Globes Water Credit
LEED V4 Water Efficiency Credit

NOTES

For product line drawings, [view model-specific spec sheets](#).

All information contained within this document subject to change without notice.

VIDEOS

 [PVD Special Finishes](#)