



Model No: 590T1120-HP

COMPLIES WITH:

- · CSA certified.
- Complies to ASME A112.18,1
- IAPMO listed
- ADA compliant and meets Handicapped Accessibility Standard ASME 117.1 of less than 5 lbs operating force
- US Patent #6, 826, 455
- For optimum performance of this product, we recommend a system
 pressure between 20 and 80 psi static. This product will operate up to a
 maximum of 125 psi static per ANSI and CSA requirements. However, we
 do not recommend pressures above 80 psi. Thermal expansion or leaking
 pressure reducing valves may require use of expansion tanks or relief
 valves to ensure your system never exceeds its maximum intended
 pressure setting.
- (Contact Delta Representative for State and/or Local Approvals)





Electronic Faucets

Deckmount Hi-Rise Synergy® Spout with Integral Sensor

SPECIFICATION:


- Infrared electronic handwash system
- H²Optics[™] technology- no external adjustments required
- Chrome plated one piece CAST Hi-Rise Synergy® spout with Integral sensor
- · Adjustable sensing range and timeout
- Audible low battery indicator
- Deckmount Hi-Rise Synergy® Spout with Integral Sensor
- Outlet#: 2 Vandal Resistant 1.5 USGPM (5.7 L/Min) Laminar w/ Antimicrobial by AgIONTM
- Single Hole Deckmount Hi-Rise Spout with Integral Sensor
- Battery powered (4 "C" cell batteries, except when -HP selected)
- Solenoid and Controller in Plastic Surface Mount Housing-REQUIRES SINGLE TEMPERED WATER SUPPLY
- Hydro Power™

OPERATION:

- · Hands free (touchless) operation.
- Water flows when sensor is activated/ Water flow stops upon de-activation of sensor.
- Auto Shutoff feature that is selectable between 15 to 73 seconds. Factory set to 45 seconds. Will reset once obstruction is removed.
- Adjustable sensing distance 76mm-381mm (3" to 15") factory set to 229mm (9") (±1.0")

(Dimensional drawing on following page)



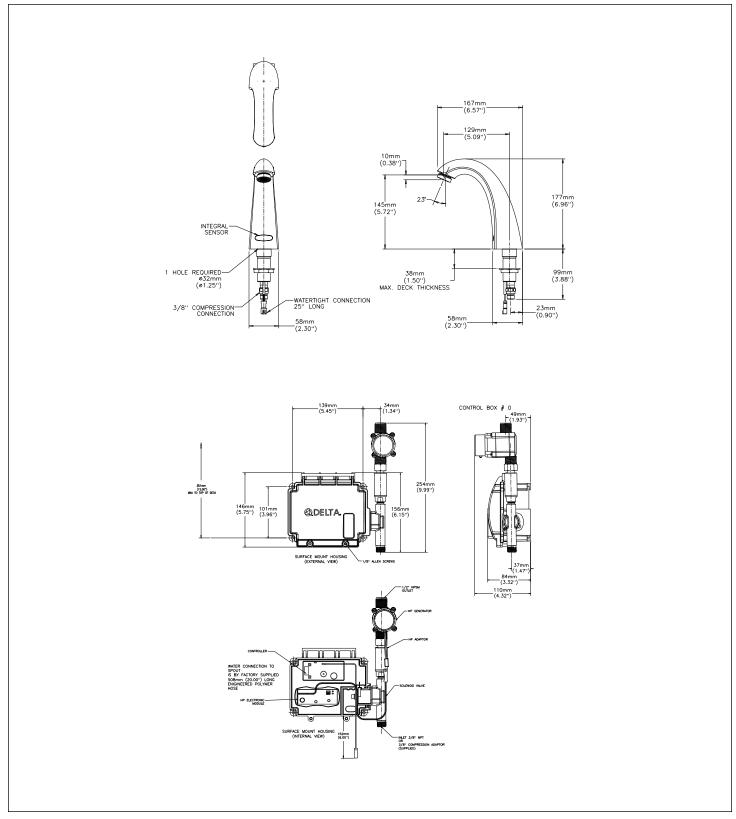

Delta reserves the right (1) to make changes to specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference. Measurement may vary plus or minus 6mm(0.25"). Mounting locations are suggested only. Check with local codes for requirements in your area.