



POND PUMPS

BVP

BVP MAX

 **DAB PUMPS LTD.**
Unit 4, Stortford Hall Industrial
Park Dunmow Road, Bishops Stortford, Herts
CM23 5GZ - UK
info.uk&eire@dwtgroup.com
Tel.: +44 1279 652 776
Fax: +44 1279 657 727


 **DAB PUMPS B.V.**
Albert Einsteinweg, 4
5151 DL Drunen - Nederland
info.netherlands@dwtgroup.com
Tel.: +31 416 387280
Fax: +31 416 387299

 **DAB PUMPS B.V.**
Brusselstraat 150
B-1702 Groot-Bijgaarden - Belgium
info.belgium@dwtgroup.com
Tel.: +32 2 4668353
Fax: +32 2 4669218

 **DAB PUMPEN DEUTSCHLAND GmbH**
Tackweg 11
D - 47918 Tönisvorst - Germany
info.germany@dwtgroup.com
Tel.: +49 2151 82136-0
Fax: +49 2151 82136-36

 **DAB PUMPS INC.**
3226 Benchmark Drive
Ladson, SC 29456 USA
info.usa@dwtgroup.com
Ph. : 1-843-797-5002
Fax : 1-843-797-3366

 **DAB PUMPS IBERICA S.L.**
Parque Empresarial San Fernando
Edificio Italia Planta 1ª
28830 - San Fernando De Henares - Madrid
Spain
info.spain@dwtgroup.com
Ph.: +34 91 6569545
Fax: +34 91 6569676

 **DWT GROUP Russia**
100 bldg. 3 Dmitrovskoe highway,
127247 Moscow - Russia
info.russia@dwtgroup.com
Tel.: +7 495 739 52 50
Fax: +7 495 485-3618

 **DAB PUMPS CHINA**
Shandong Sheng Qingdao Shi
Jinjji Jishu Kaifaqu Kaituo Rd
ZIP PC266510
CN - China
info.china@dwtgroup.com
Tel.: +8613608963089
Fax: +8653286812210



DAB Pumps Inc.
3226 Benchmark Drive Ladson SC 29456
Phone 843-797-5002 - Fax 843-797-3366
<http://us.dabpumps.com/>

BVP

BVP HYDRAULIC DATA



APPLICATIONS

Multi Purpose Pumps for Pond fountains & Water Falls

Multi-purpose submersible pumps for drainage, emptying, pumping water between containers, to circulate water in garden ponds, create water falls and play water features.

Suitable to pump clear water containing particles with maximum diameter up to 1 1/2".

- * Drainage
- * Emptying sumps
- * Transferring water between large containers
- * Circulating water in Garden ponds
- * Water falls
- * Fountains
- * Water features

TECHNICAL DATA

CONSTRUCTION

- Anti-corrosive and rust-proof materials
- Motor with thermic overload protection
- Wear resistant shaft and impeller
- Excellent cooling of the motor that enables the pump to operate even when it is partially submerged
- Automatic version with start/ stop float switch and Manual version
- Supplied with power cable with plug and self-sealing fitting

TECHNICAL DATA


FEATURES & BENEFITS

- Plug & Play
- Large range to cover various requirements
- Provides Excellent flows "In a compact design"
- Efficient motors
- 115v 60Hz
- CSA and UL approved
- Dry Run protection (with Float Switch)
- Built in thermic overload


TECHNICAL DATA

Model	HP	Watts	Volts	Frequency	Amps	Max Solids	Max Flow	Max Head	Discharge
BVP Man - Auto	3/4	1000	115	60 Hz	10	1" 1/2	88 gpm	36 ft	1" 1/2 NPT
BVP 230	3/4	1000	230	60 Hz	5				
BVP-Max	1	1100	115	60 Hz	11.2		111 gpm	39 ft	
BVP-Max 230	1	1100	230	60 Hz	5.6				

TECHNICAL DATA

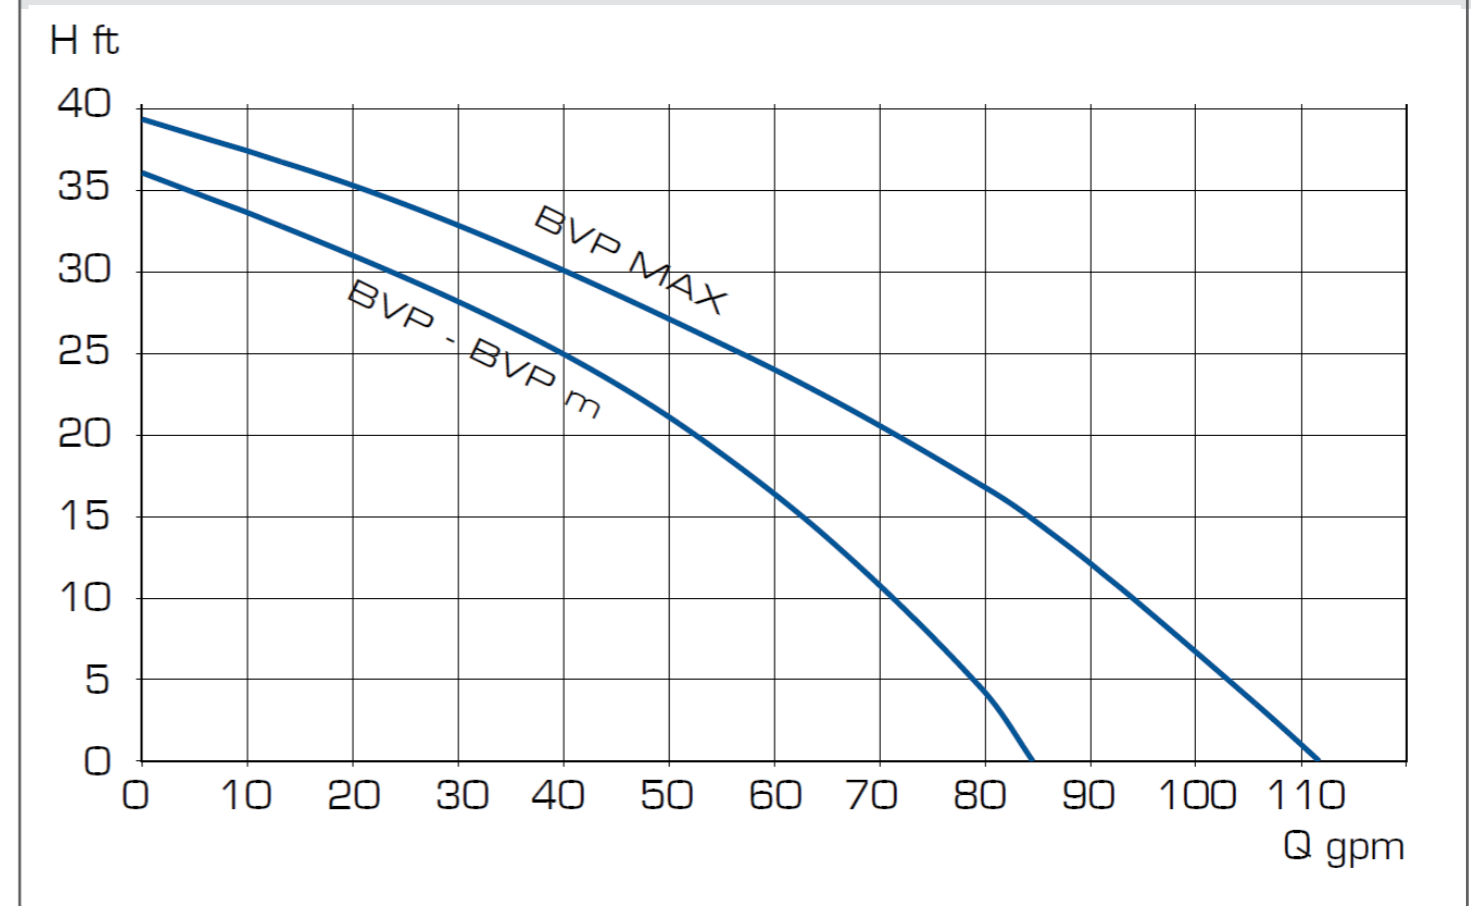

DIMENSIONS

Model	Length	Depth	Height	Weight	Pallet Qty	 l x d x h
BVP	9.4"	9.4"	15.7"	17.6 lbs	54	
BVP-Max	9.4"	9.4"	15.7"	17.6 lbs		