

# Zip Chillmaster<sup>®</sup>

Floor-standing and wall mounted chillers

**Filtered drinking water**



## Features

- The effective way to put chilled filtered water on tap for staff or public access
- Heavy duty, easy-to-clean stainless steel bowl and stainless steel case
- Filter change reminder light signals when filter cartridge replacement is due
- Filter cartridges are quick and simple to change
- BREEAM compliant using optional kit ZG500

*As Zip policy is one of continuous product improvement changes to specifications may be made without prior notice.*

*The terms Zip and Chillmaster are Trademarks.*

# Zip Chillmaster®

Floor standing and wall-mounted chiller

Filtered drinking water

Product	Product Code	Initial draw off (glasses*)	Recovery (glasses per hour)	Compressor rating (hp)	Dimensions (mm) H x W x D
Zip Chillmaster® Floor standing	CH101	8	140	1/4	915 x 350 x 350
Zip Chillmaster® Wall mounted	CH102	8	140	1/4	530 x 350 x 350

\*Standard glass 200ml. Rating shown represents the number of glasses that may be drawn within the specified temperature range of 5°C to 10°C. Actual outlet temperature may vary as a result of variations in water inlet temperature and ambient air temperature.

## Technical Features

- Upright water chiller with lever-action carafe filler
- Delivers 140 glasses per hour of chilled filtered water within the operating range of 5°C to 10°C
- Compressor rated at 1.4 hp
- Submicron filtration
- Stainless steel water bowl and outer case. 15mm water connections
- Adjustable levelling feet. Integrated surge protection
- Integral 'P' trap or 'S' trap
- BREEAM compliant using optional kit ZG500

### Storage capacity

Nominal 1.8 litre.

### Output capacity

Rated at 140 glasses per hour at >10°C.

### Rating

0.3kW.

### Refrigerant type

Non-toxic R134A.

### Chiller type

Fan cooled condenser with a compressor rated at 1/4hp.

### Carafe filler

Chrome plated brass lever action tap with swivel head.

### Bubbler

Optional.

### Outer Case

Brushed finish stainless steel case with front access panel.

### Filtration type

Submicron filtration.

### Warranty

One-year on site parts and labour. For full details of the Zip Warranty Scheme visit: [www.zipheaters.co.uk/warranty](http://www.zipheaters.co.uk/warranty).

## Installation

### Location

The chiller should be positioned where it is easy for users to access.

Water, drainage and power should all be available nearby.

The chiller should be mounted on a level surface (levelling feet are provided).

The chiller must be installed with clearances of 50mm left, right and rear.

### Plumbing

Water connections 15mm.

Should be installed only by a qualified plumber.

### Electrical


To be wired to a double pole switched fused spur with a minimum break capacity of 13 amps.

Installation must comply with current IEE regulations.

### Technical advice

Contact Zip on 0845 6 005 005

## Dimensions

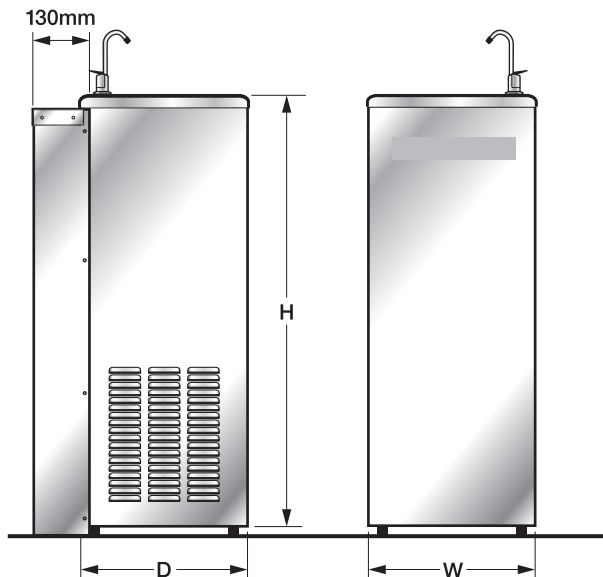

## Typical Installation

