

### HD2600XD+ - At A Glance

The HD2600XD+ is our Industrial grade looping DVD player. The HD2600XD+ is specifically designed, built & proven to play seamlessly and continuously 24/7 for over 4+ years. The HD2600XD+ automatically powers on, auto starts, auto plays and auto loops without manual interaction, even in the event of a power loss. It delivers true reliability, durability and exceptional HD picture quality. The HD2600XD+ is an ideal and simple digital signage solution for continuous video playback for any digital signage display in any industry.

### Advantages & Benefits


- Auto starts, auto plays, and auto loops without manual interaction, even in the event of power loss
- Reliability with 4+ years of continuous 24/7 looping playback
- 2 year premium warranty
- UL approved for use in hospitals and healthcare
- Compatible with (hospital) pillow speaker
- Plays content from traditional DVDs with option to skip menu's and previews on discs
- Operates both vertically and horizontally
- Front slot-load DVD with instant eject release
- Rear mounted IR jack
- Compatible with our IPM+ which can be push buttons to create an interactive DVD signage solution
- Optional wall mount bracket available (sold separately)

### In The Box

- HD2600XD+ Industrial DVD / Media Player
- Multi Function Remote Control
- 12VDC External Regulated Power Supply
- 5 Foot High Quality Shielded HDMI Cable
- 5 Foot Male RCA To Male RCA Audio And Video Cable
- 5 Foot Component Video Cable (Red/Green/Blue)


### Specifications

- Slim and Compact aluminum industrial case - 7 3/8" W x 9" D x 2" H
- Weight: Player 3.825 lbs, Player with all parts & box - 6.5 lbs
- Automatically Powers On, Auto Starts & Auto Repeats/No manual interaction (Skips Menus and Previews)
- Industrial grade hardware for maximum use & lifespan
- Reads DVD/CD, DVD-Video, DVD-R/RW, DVD+R/RW, Video CD, SVCD (Super Audio CD), CD-R/RW, CD-Audio
- Audio Output: Stereo L/R (line level)
- Reads DVD formatted and audio formatted CD discs such as DVD-R/RW, DVD+R/RW, CD-R/RW, CD-Audio
- Video outputs - Composite video (NTSC/PAL), component video and HDMI
- Progressive Scan
- Load/Eject 12cm discs
- Single external 12VDC (1.5A) power supply
- Operating temperature range -15°C to 55°C
- Supports -90° and +90° application angle mounting
- Supports Subtitle Languages
- Warranty: 2 Years

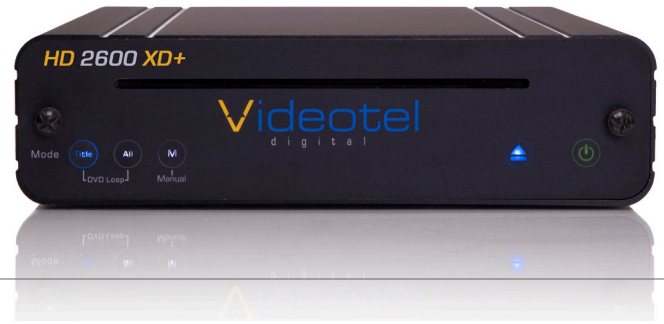

Optimize with added accessories (sold separately)

Wall mount bracket



Interplay Module (IPM+)



### Safety/Tested

- UL Listed/CE/FCC Part 15B, ICES 003, EN 55103-1, EN 55103-2, EN 61000-3-2, EN 61000-3-3
- Hospital Grade UL-listed for Health Care Facilities - Annex Q

