

Product Summary

The VP72 4K is our 4K/1080 industrial grade interactive digital signage media player with the capability to play content locally from USB/SD. The VP72 4K auto powers on, auto plays and auto seamless loops (frame to frame) audio, video and image files or a mix of files. The VP72 4K may easily convert to an interactive digital signage solution coupled with any of our LED push buttons, motion sensors, proximity sensors, weight sensors or with RFID to uniquely trigger content with any of the following:



Push

Move

Wave

Elevate


Sense

Features & Benefits

- Designed with industrial grade parts & components
- Full 1080/H.265 4K Superior Video Quality
- Estimated lifetime: 6-12 years running consistently 24/7
- Seamlessly plays, & loops audio, video, image or mixed files
- Interactive Capabilities– triggers multiple content files with LED buttons, motion sensors, weight sensors and RFID tags
- 2G/5G Wifi (Only for Time Sync)
- Heavy duty full metal enclosure designed for rugged use
- Composite video with stereo audio output
- VGA Output for legacy systems
- On board audio extractor for alternate audio output
- RS232 capable – one way communication
- Portrait video rotation options (CW, CCW, 180 and 360)
- No proprietary software required

Specifications

- Supports up to 4096x2304 resolution at 60fps
- Video Codecs: MPEG1, MPEG2, MPEG4, H.263, H.264, H.265, AVS, VP8, MVC
- Display Resolutions: 480i, 480p, 576i, 576p, 720i, 720p, 1080i, 1080p, 3840x2160p60, 4096x2304p60 and composite video (NTSC or PAL)
- HDMI Version: 2.0
- Audio Formats: .mp2, .mp3, .wma, .ogg, .flac, .wav, .aac
- Image Formats: .jpeg, .bmp, .gif, .png (Images up to 8176x8176)
- Recommended Bitrate: 100mbps or less - Pending
- Frame Rate Capability: 23.98fps, 24fps, 25fps 29.97fps, 30fps, 60fps
- Audio Output: HDMI and Stereo L/R (line level)
- Screen Rotation: 90°, 180°, 270° and 360°
- Compatible SD/USB: FAT, FAT32 and NTFS (ExFAT - Pending)
- Playback File Size Limitation: Simply limited to corresponding size of USB/SD
- I/O Port: TTL and RS232 Communication
- Dimensions: 5.365" / 135mm (W) x 4.75" / 120mm (D) x 1.365" / 37mm (H)
- Weight: Player 1lb, Player with all parts & box - 2lbs 13oz
- Power Supply: 100VAC-240VAC input/5VDC (1A)
- 88 Language options
- Warranty: 2 Years

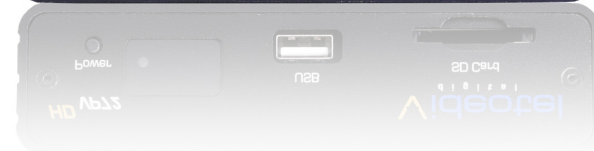

In The Box

- VP72 4K/1080 Digital Signage Media Player
- Multi Function Remote Control
- 5VDC External Regulated USB Power Supply
- 16 Gig (Or Higher) Class 10 SD Card Drive
- 16 Gig (Or Higher) Class USB Thumb Drive
- 5 Foot High Quality Shielded HDMI Cable
- 5 Foot Male RCA To Male RCA Audio & Video Cable



LinkedIn



YouTube

For more information or to place an order please call us or visit us on line
www.videoteldigital.com • 619-670-4412 • sales@videoteldigital.com



Facebook



Twitter