




Data sheet PS

ENGLISH

RS Stock No. 896-8395

RS Stock No. 896-8395

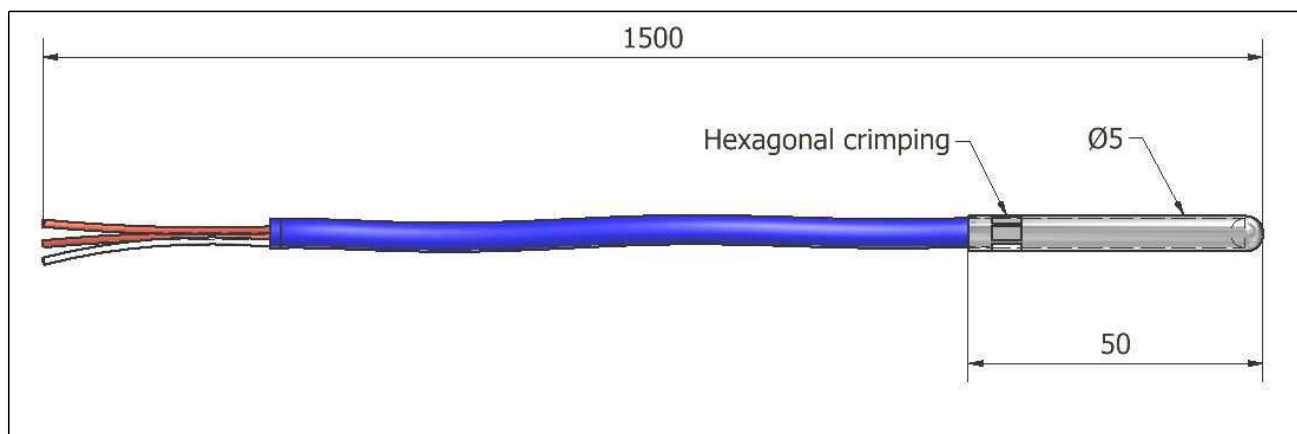

RTD Ø5 x 50 . Pt100 . 3 wires . Length 1.5m

RANGE :

-20°C / +100°C

USE :

Universal

KEY POINT :

Flexible

SPECIFICATIONS:

PT100Ω thermic element A Class – 1x3 wires

Tip protector in SS304L

Cable 3 conductors, isolated PVC/PVC

Hexagonal crimping

DIMENSIONS:

Tip protector length = 50mm

Tip protector diameter = 5mm

Total length (tip + cable) = 1500mm

METROLOGICAL DATA :

As per IEC 751

Standard tolerance PT100 A class : $\pm 0.15 + 0.002 \cdot [t^{\circ}\text{C}]$