



E1FW

E1FW GLOBALLY APPROVED, EXPLOSIVE ATMOSPHERE CABLE GLAND


FOR ALL TYPES OF STEEL & ALUMINIUM WIRE ARMoured CABLES

- Metal-to-metal armour clamping
- Direct & remote installation
- Displacement type flameproof inner seal
- Controlled outer 'load retention' seal
- Unique OSTG prevents overtightening
- -60°C to +130°C
- Globally marked, IECEx, ATEX & cCSAus
- Superior EMC performance
- Designed to prevent coldflow, see CMP Technical Document TSO01

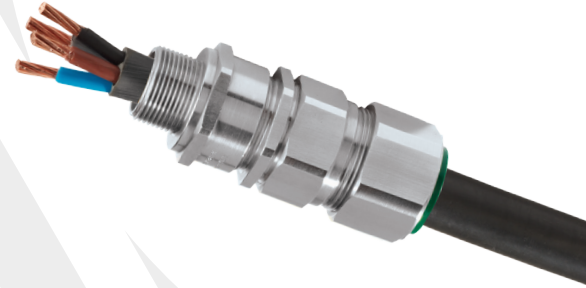

TECHNICAL CLASSIFICATION	
DESIGN SPECIFICATION	BS 6121: Part 1:1989, IEC 62444, EN 62444
MECHANICAL CLASSIFICATION*	Impact = Level 8, Cable Anchorage = Class D
ENCLOSURE PROTECTION	IK10 to IEC 62262 (20 joules) Brass & Stainless Steel only
INGRESS PROTECTION RATING**	IP66 as standard (IP67, IP68*** available upon request)
DELUGE PROTECTION COMPLIANCE	DTS01:91 option available on request (white ferrule for identification purposes)
CABLE GLAND MATERIAL	Brass, Electroless Nickel Plated Brass, Aluminium
SEAL MATERIAL	CMP SOLO LSF Halogen Free Thermoset Elastomer
CABLE TYPE	Single Wire Armour (SWA), Aluminium Wire Armour (AWA)
ARMOUR CLAMPING	Detachable Armour Cone & AnyWay Universal Clamping Ring
SEALING TECHNIQUE	CMP Inner Displacement Seal & Unique CMP 'LRS'™ Outer Load Retention Seal
SEALING AREA(S)	Cable Inner Bedding & Outer Cable Sheath

* Mechanical & Electrical Classifications applied as per IEC 62444 & EN 62444 ** When CMP installation accessories are used. Refer to www.cmp-products.com for further information. *** IP68 tested to a minimum depth of 30 metres for 12 hours, alternate depths / durations can be provided upon request

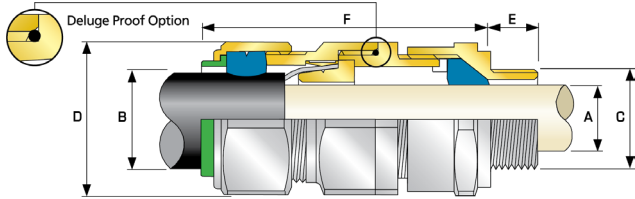

GLOBAL PRODUCT CERTIFICATION			
ATEX CERTIFICATE	CML18ATEX1324X, CML18ATEX4316X	IECEx CERTIFICATE	IECEx CML 18.0181X, IECEx SIM 14.0007X
CODE OF PROTECTION	⊕ II 2G 1D, Ex db IIC Gb, Ex eb IIC Gb, Ex ta IIIC Da, ⊕ II 3G Ex nR IIC Gc, ⊕ I M2, Ex db I Mb, Ex eb I Mb	CODE OF PROTECTION	Ex db IIC Gb, Ex eb IIC Gb, Ex nR IIC Gc, Ex ta IIIC Da, Ex db I Mb, Ex eb I Mb
COMPLIANCE STANDARDS	EN 60079-0, 1, 7, 15, 31	COMPLIANCE STANDARDS	IEC 60079-0, 1, 7, 31
cCSAus CERTIFICATE	1310517		
CSAus CODE OF PROTECTION	Class II, Div 2, Groups E, F and G, Class III, Enclosure Type 4X, Class I, Zone 1, AEx e II, AEx nR II		
cCSA CODE OF PROTECTION	Class I, Div 2, Groups A, B, C and D, Class II, Div 2, Groups E, F and G, Class III, Enclosure Type 4X, Ex d IIC, Ex e II, Ex nR II		
COMPLIANCE STANDARDS	CAN/CSA-C22.2 No 0, 18, 25, 30, 94, 174, CAN/CSA-60079-0, 1, 7, ANSI/UL 514B Ed 5, ANSI/UL 50 Ed 11, ANSI/UL 2225 Ed 4, UL60079-0, 1, 7		
EAC CERTIFICATE	TC RU C-GB.AA87.B.00487	UkrSEPRO	CLJ 19.0371X
KCS KOSHA CERTIFICATE	14-GA4B0-0257X	CCOE / PESO (INDIA) CERTIFICATE	P444949
NEPSI CERTIFICATE	GVJ18.1251X	INMETRO APPROVAL	TUV 12.0618X
RETIE APPROVAL NUMBER	03866		
MARINE APPROVALS	LRS: 01/00172, DNV: TAE000000Y, ABS: 14-LD234401A-4-PDA, BV: 43180 A1 BV		



COMBINED ORDERING REFERENCE			AVAILABLE ENTRY THREADS 'C'		CABLE BEDDING DIAMETER 'A'		OVERALL CABLE DIAMETER 'B'		ARMOUR RANGE		ACROSS FLATS 'D'	ACROSS CORNERS 'D'	PROTRUSION LENGTH 'F'	SHROUD	CABLE GLAND WEIGHT (kgs)
SIZE	TYPE	ORDERING SUFFIX	METRIC	THREAD LENGTH 'E'	MIN	MAX	MIN	MAX	MIN	MAX	MAX	MAX			
20S16	E1FW	1RA5	M20	15.0	3.1	8.6	6.1	13.1	0.8	1.25	24.0	26.4	72.5	PVC04	0.16
20S	E1FW	1RA5	M20	15.0	6.1	11.6	9.5	15.9	0.8	1.25	24.0	26.4	70.0	PVC04	0.15
20	E1FW	1RA5	M20	15.0	6.5	13.9	12.5	20.9	0.8	1.25	30.5	33.6	73.0	PVC06	0.21
25S	E1FW	1RA5	M25	15.0	11.1	19.9	14.0	22.0	1.25	1.6	37.5	41.3	89.0	PVC09	0.33
25	E1FW	1RA5	M25	15.0	11.1	19.9	18.2	26.2	1.25	1.6	37.5	41.3	89.0	PVC09	0.33
32	E1FW	1RA5	M32	15.0	17.0	26.2	23.7	33.9	1.6	2.0	46.0	50.6	86.0	PVC11	0.43
40	E1FW	1RA5	M40	15.0	22.0	32.1	27.9	40.4	1.6	2.0	55.0	60.5	90.0	PVC15	0.62
50S	E1FW	1RA5	M50	15.0	29.5	38.1	35.2	46.7	2.0	2.5	60.0	66.0	91.0	PVC18	0.75
50	E1FW	1RA5	M50	15.0	35.6	44.0	40.4	53.0	2.0	2.5	70.1	77.1	95.0	PVC21	0.95
63S	E1FW	1RA5	M63	15.0	40.1	49.9	45.6	59.4	2.0	2.5	75.0	82.5	102.0	PVC23	1.34
63	E1FW	1RA5	M63	15.0	47.2	55.9	54.6	65.8	2.0	2.5	80.0	88.0	104.0	PVC25	1.34
75S	E1FW	1RA5	M75	15.0	52.8	61.9	59.0	72.0	2.0	2.5	90.0	99.0	115.0	PVC28	2.11
75	E1FW	1RA5	M75	15.0	59.1	67.9	66.7	78.4	2.5	3.0	100.0	110.0	117.0	PVC30	2.42
90	E1FW	1RA5	M90	24.0	66.6	78.6	76.2	90.3	3.15	4.0	114.3	125.4	147.0	PVC32	4.21
100	E1FW	1RA5	M100	24.0	76.0	90.9	86.1	101.4	3.15	4.0	123.0	135.3	140.0	LSF33	4.45
115	E1FW	1RA5	M115	24.0	86.0	97.9	101.5	110.2	3.15	4.0	133.4	146.7	162.0	LSF34	6.19
130	E1FW	1RA5	M130	24.0	97.0	114.9	110.2	123.2	3.15	4.0	152.4	167.6	174.0	LSF35	8.34

* Note : For material options please add the following suffix to change the Ordering Reference ; Brass (no suffix required), Nickel Plated Brass "S", Copper Free Aluminium "1" For NPT options add the following digits to the material suffix; 1/2" = 31; 3/4" = 32; 1" = 33; 1 1/4" = 34; 1 1/2" = 35; 2" = 36; 2 1/2" = 37; 3" = 38; 3 1/2" = 39; 4" = 310 (Brass requires prefix '0')

Examples: 32E1FW1RA534 = Nickel Plated Brass 1 1/4" NPT, 50SE1FW1RA035 = Brass 1 1/2" NPT, 20E1FW1RA5 = Nickel Plated Brass M20

Dimensions are displayed in millimetres unless otherwise stated

Dimensions listed are for metric cable glands only. Dimensions for alternative threads may vary, please see supplementary technical data sheet.