

材质 Material:

ABS 耐热性,耐低温, 阻燃, 高强度,抗冲击力好,工作温度: -20°C~70°C

黄铜、螺丝质铁质表面镀锌

适用电压范围: 250-450V

底座颜色, 参照图片,特殊颜色欢迎订做


ABS, good resist dissolve, good bounce impact fore. Working Temperature: -20°C to 70°C.

Brass. Screw is iron plated zinc.

Voltage:250-450V.


Color: according sample picture or customized.

HC-024型

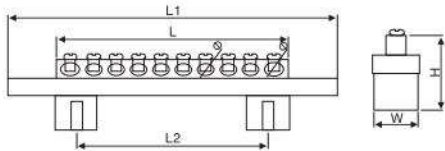


| Way | Spec. | L | L1 | L2 | H | W | Φ | Screw Size | Plastic Setting |
|-----|-------|------|-----|----|----|----|----------|------------|-----------------|
| | Wxh | mm | | | | | | | |
| 5 | 7×11 | 42.5 | 120 | 70 | 35 | 16 | 6.5(2×7) | M5×8 | ABS、PE |
| 7 | 7×11 | 58.5 | 120 | 70 | 35 | 16 | 6.5(2×7) | M5×8 | ABS、PE |
| 10 | 7×11 | 82.5 | 120 | 70 | 35 | 16 | 6.5(2×7) | M5×8 | ABS、PE |

HC-025型

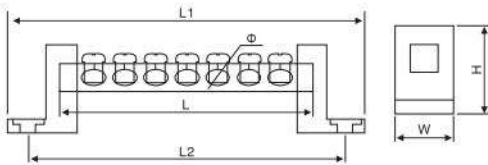

| Way | Spec. | L | L1 | L2 | H | W | Φ | Screw Size | Plastic Setting |
|-----|-------|-----|-------|-------|----|----|---------|------------|-----------------|
| | Wxh | mm | | | | | | | |
| 3 | 7×10 | 33 | 59.5 | 49.5 | 35 | 15 | 6.5 | M5×9 | ABS |
| 4 | 7×10 | 41 | 67.5 | 57.5 | 35 | 15 | 6.5 | M5×9 | ABS |
| 5 | 7×10 | 49 | 75.5 | 65.5 | 35 | 15 | 6.5 | M5×9 | ABS |
| 6 | 7×10 | 57 | 83.5 | 73.5 | 35 | 15 | 6.5 | M5×9 | ABS |
| 7 | 7×10 | 65 | 91.5 | 81.5 | 35 | 15 | 6.5 | M5×9 | ABS |
| 8 | 7×10 | 73 | 99.5 | 89.5 | 35 | 15 | 6.5 | M5×9 | ABS |
| 10 | 7×10 | 90 | 116.5 | 106.5 | 35 | 15 | 6.5 | M5×9 | ABS |
| 12 | 7×10 | 106 | 132.5 | 122.5 | 35 | 15 | 6.5 | M5×9 | ABS |
| 15 | 7×10 | 130 | 156.5 | 146.5 | 35 | 15 | 6.5 | M5×9 | ABS |
| 3 | 9×15 | 46 | 68 | 58 | 35 | 15 | 9(2×10) | M5×12 | ABS |
| 5 | 9×15 | 68 | 90 | 80 | 35 | 15 | 9(2×10) | M5×12 | ABS |
| 7 | 9×15 | 90 | 112 | 102 | 35 | 15 | 9(2×10) | M5×12 | ABS |
| 8 | 9×15 | 101 | 123 | 113 | 35 | 15 | 9(2×10) | M5×12 | ABS |
| 10 | 9×15 | 123 | 145 | 135 | 35 | 15 | 9(2×10) | M5×12 | ABS |
| 12 | 9×15 | 145 | 167 | 157 | 35 | 15 | 9(2×10) | M5×12 | ABS |
| 15 | 9×15 | 178 | 200 | 190 | 35 | 15 | 9(2×10) | M5×12 | ABS |

HC-026型

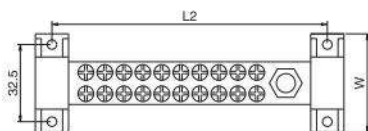

| Way | Spec. | L | L1 | L2 | H | W | Φ | Screw Size | Plastic Setting |
|-----|-------|----|-----|-----|----|----|-----|------------|-----------------|
| | Wxh | mm | | | | | | | |
| 1+4 | 9×18 | 64 | 82 | 68 | 29 | 42 | 5.3 | M5×8 | ABS、PE |
| 1+6 | 9×18 | 80 | 98 | 84 | 29 | 42 | 5.3 | M5×8 | ABS、PE |
| 1+8 | 9×18 | 96 | 114 | 100 | 29 | 42 | 5.3 | M5×8 | ABS、PE |
| 1+4 | 12×18 | 64 | 82 | 68 | 29 | 42 | 5.3 | M5×8 | ABS、PE |
| 1+6 | 12×18 | 80 | 98 | 84 | 29 | 42 | 5.3 | M5×8 | ABS、PE |
| 1+8 | 12×18 | 96 | 114 | 100 | 29 | 42 | 5.3 | M5×8 | ABS、PE |