
# METROPOLIS

### A76.48.42.V4

### Installation Instructions

- Tapware to be installed by a licenced plumber in accordance with AS/NZS 3500:2003
- Recommended working water pressure 150 500kPa
- Maximum water temperature is 65 deg C
- After completing the installation check function of tapware and ensure no water leaks.

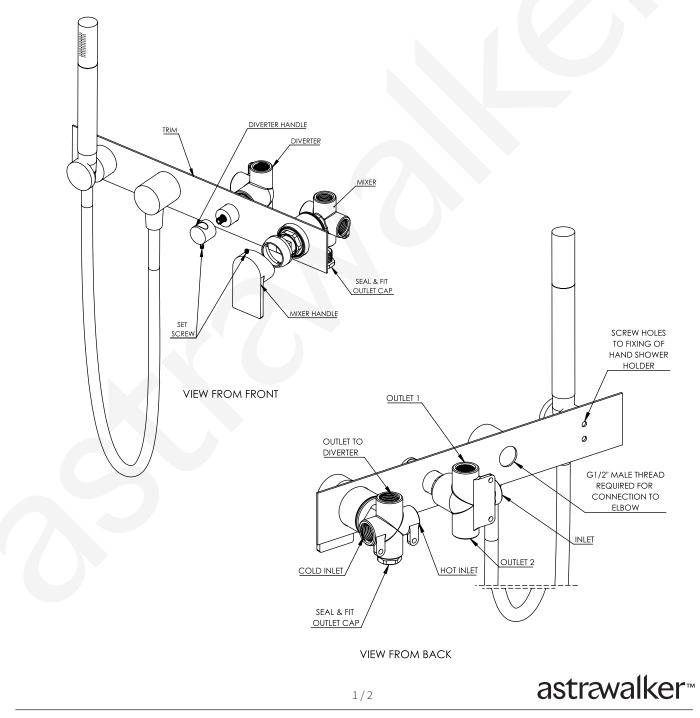


# METROPOLIS

#### A76.48.42.V4

## Installation Instructions

Install the diverter & mixer supplied to a secure nogging at the correct depth as shown in the drawing below. Ensure the diverter & mixer are square and parallel between the wall studs, at the required centres shown below in Figure 1.

To allow the tapware to fit correctly the thickness of the finished wall surface must be calculated prior to 'rough-in'.

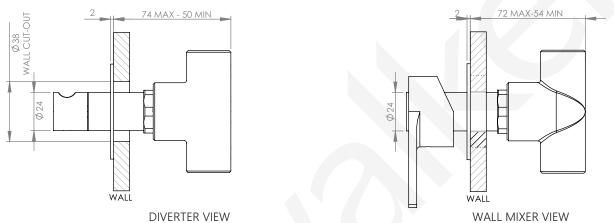

When installing the mixer ensure that it is positioned the correct way (as per markings on the body) with hot water on the left and cold water on the right when viewed from an operating position.

Ensure water lines are completely flushed prior to connecting the mixer.

Prior to fit off ensure the correct size cut-out has been achieved on all components.

Secure the backplate, hand shower, and trim kits for the diverter & mixer to the inwall bodies. Ensure this is sealed and water-tight.

