

avenir[®]

Technical Specifications

VERSION 2022.01



Cubo

Heated & Non-Heated Towel Rails

VARIATIONS

Heated Version	Non-Heated Version	Height x Width	Rails	Watts/rail
TRH3-45	Use heated version	32 x 450 mm	1 to 5	10 Watts
TRH3-65	Use heated version	32 x 650 mm	1 to 5	14 Watts
TRH3-85	Use heated version	32 x 850 mm	1 to 5	18 Watts

NOTES

- This is a Low Voltage product - Safe to be installed in Zone 1 (wet areas)
- In-Wall Kit required - TRCF105 - Max 5 rails (Sold separately)
- In-Wall Kit can be cut to length or into 2 pieces for split locations
- In-Wall Kit is installed behind wall lining or requires a 900mm high x 30mm wide x 25mm deep slot in wall render
- Supplied spigots can accommodate up to 30mm (Wall lining + adhesive and tiles)
- Longer spigots are available for thick stone / tiles - 50mm (YZF63 - Sold separately)
- Wire specifications: Use flexible multistrand 1mm² - Do not exceed 5 meters in length.

STANDARD FINISHES

Mirror Polished

Stainless Steel

RRP

Brushed

Stainless Steel

+20% (Stocked)

Matt Black/White

Painted

+40% (Stocked)

Gunmetal

PVD

+50% (Stocked)

Brushed Gold

PVD

+60% (Stocked)

SPECIFICATIONS

Voltage

12 Volts

Standards

AS/NZ 60335.2.43

Material

Stainless Steel 304

Electrical Connection

Concealed Wiring only - any leg

Finish

Mirror Polished

Heating Method

Dry Internal Heating Element

Ingress Protection

IPX5 (Suitable for wet areas)

Required / Sold Separately

In-Wall Kit (TRCF105)

DEVELOPED IN
AUSTRALIA




HEATING TIME
30 MINUTES



WARRANTY
10 YEAR



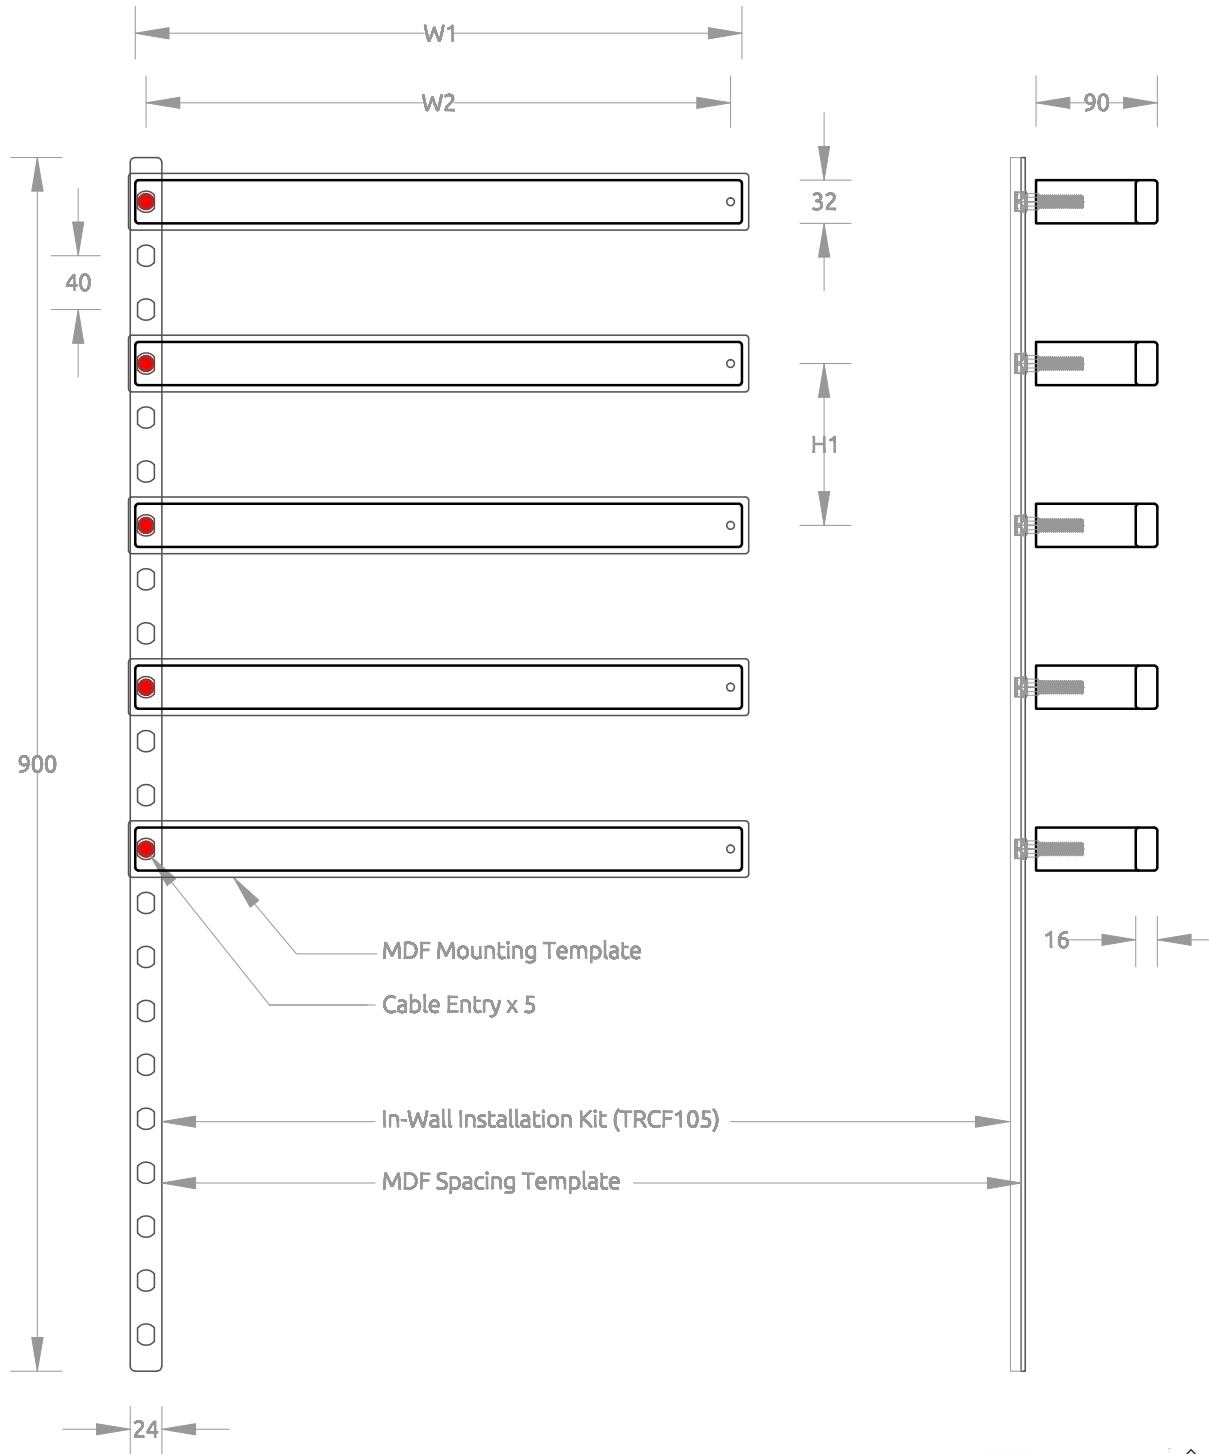

VARIATIONS

Heated Version	H1 (Spacing)	W1 (Overall)	W2 (Fixings)
TRH3-45	40mm x Spaces	450mm	434mm
TRH3-65	40mm x Spaces	650mm	634mm
TRH3-85	40mm x Spaces	850mm	834mm