

# avenir<sup>®</sup>

## Technical Specifications

VERSION 2022.01



# Verso

## Heated & Non-Heated Towel Rails

### VARIATIONS

Heated Version	Non-Heated Version	Height x Width	Rails	Watts/rail
TRH4-50	Use heated version	40 x 500 mm	1 to 5	15 Watts
TRH4-77	Use heated version	40 x 770 mm	1 to 5	23 Watts




### NOTES


- This is a Low Voltage product - Safe to be installed in Zone 1 (wet areas)
- Transformer required - TRTR200-24V - Max 6 rails (Sold separately)
- Wire specifications: Use flexible multistrand 1mm<sup>2</sup> - Do not exceed 5 meters in length.

### STANDARD FINISHES

<b>Mirror Polished</b> Stainless Steel RRP	<b>Brushed</b> Stainless Steel +20% (Stocked)	<b>Matt Black/White</b> Painted +40% (Stocked)	<b>Gunmetal</b> PVD +50% (Stocked)	<b>Brushed Gold</b> PVD +60% (Stocked)
--	---	--	--	--

### SPECIFICATIONS

<b>Voltage</b> 24 Volts	<b>Standards</b> AS/NZ 60335.2.43	<b>DEVELOPED IN AUSTRALIA</b> 
<b>Material</b> Stainless Steel 304	<b>Electrical Connection</b> Concealed Wiring only - any leg	<b>HEATING TIME 30 MINUTES</b> 
<b>Finish</b> Mirror Polished	<b>Heating Method</b> Dry Internal Heating Element	<b>WARRANTY 10 YEAR</b> 
<b>Ingress Protection</b> IPX5 (Suitable for wet areas)	<b>Required / Sold Separately</b> Transformer (TRTR200-24V)	

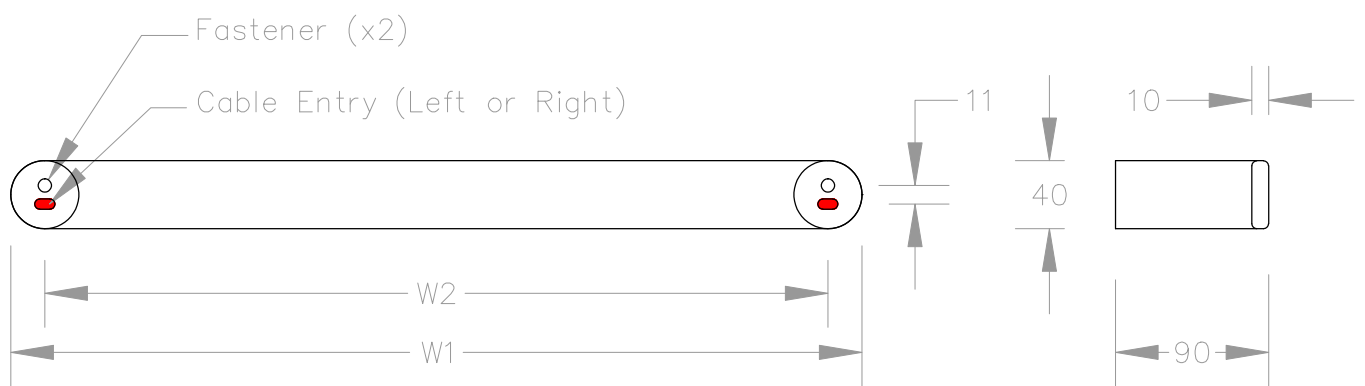

VARIATIONS

Heated Version	H1	W1 (Overall)	W2 (Fixings)
TRH4-50	40mm	500mm	460mm
TRH4-77	40mm	770mm	730mm