

avenir[®]

Technical Specifications

VERSION 2022.01



Xylo

Heated & Non-Heated Towel Rails

VARIATIONS

Heated Version	Non-Heated Version	Height x Width	Rails	Watts/rail
TRH5-45	Use heated version	30 x 450 mm	1 to 5	10 Watts
TRH5-65	Use heated version	30 x 650 mm	1 to 5	14 Watts
TRH5-90	Use heated version	30 x 900 mm	1 to 5	18 Watts

NOTES

- This is a Low Voltage product - Safe to be installed in Zone 1 (wet areas)
- In-Wall Kit required - TRCF105 - Max 5 rails (Sold separately)
- In-Wall Kit can be cut to length or into 2 pieces for split locations
- In-Wall Kit is installed behind wall lining or requires a 900mm high x 30mm wide x 25mm deep slot in wall render
- Supplied spigots can accommodate up to 30mm (Wall lining + adhesive and tiles)
- Longer spigots are available for thick stone / tiles - 50mm (YZF63 - Sold separately)
- Wire specifications: Use flexible multistrand 1mm² - Do not exceed 5 meters in length.

STANDARD FINISHES

Mirror Polished

Stainless Steel

RRP

Brushed

Stainless Steel

+20% (Stocked)

Matt Black/White

Painted

+40% (Stocked)

Gunmetal

PVD

+50% (Stocked)


Brushed Gold


PVD


+60% (Stocked)


SPECIFICATIONS

<p>Voltage 12 Volts</p>	<p>Standards AS/NZ 60335.2.43</p>
<p>Material Brass 385</p>	<p>Electrical Connection Concealed Wiring only - any leg</p>
<p>Finish Chrome Plated</p>	<p>Heating Method Dry Internal Heating Element</p>
<p>Ingress Protection IPX5 (Suitable for wet areas)</p>	<p>Required / Sold Separately In-Wall Kit (TRCF105)</p>

DEVELOPED IN AUSTRALIA 

HEATING TIME 30 MINUTES 

WARRANTY 10 YEAR 

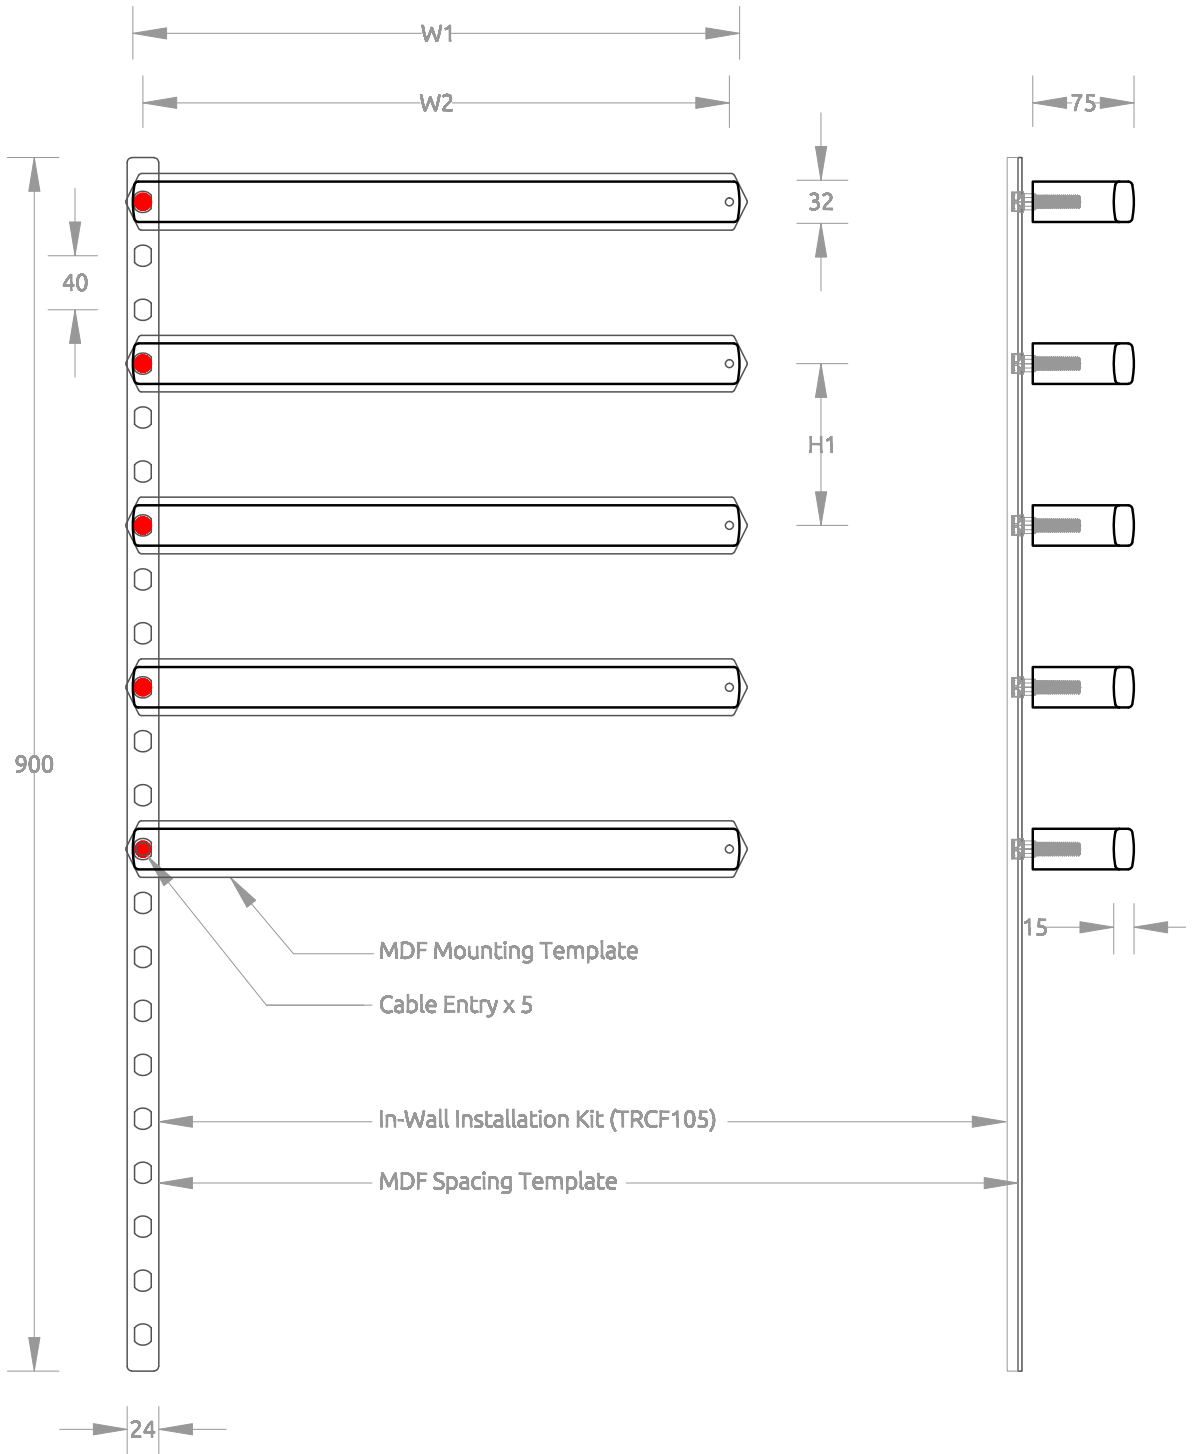

VARIATIONS

Heated Version	H1 (Spacing)	W1 (Overall)	W2 (Fixings)
TRH5-45	40mm x Spaces	450mm	435mm
TRH5-65	40mm x Spaces	650mm	635mm
TRH5-90	40mm x Spaces	900mm	885mm