

Datasheet

STANDALONE ACCESS CONTROL/ DGLI-FN - Narrow style


Product description

The DGLI range of proximity readers is offered in varied formats, to provide a real solution for contactless access control in the most demanding applications.

The reader is also available in a standard style (DGLI).

All models are extremely easy to install, and the fixings are tamper-proof and vandal-resistant screws.

Digiprox[®]

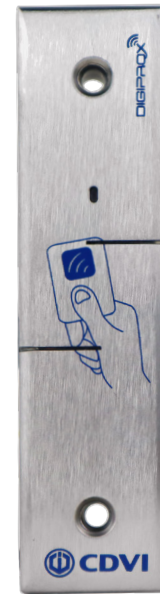

Key features

- Stainless steel proximity reader
- Low power consumption
- Internal or external use
- Audible and visual feedback
- Multicoloured LED's

 **Green**
Access Granted


 **Red**
Access Denied

 *Certification*

 *DEEE*

RoHS *Certification*

 *IP53*

 *-30°C to 60°C*

Product Information

Material: Stainless steel

Technology: 125kHz

Integration mode: CDVI Protocol

Electrical Specifications

Power supply: 12Vdc

Power consumption: 100mA

