


#### AUTOMATIC IDENTIFICATION SYSTEMS

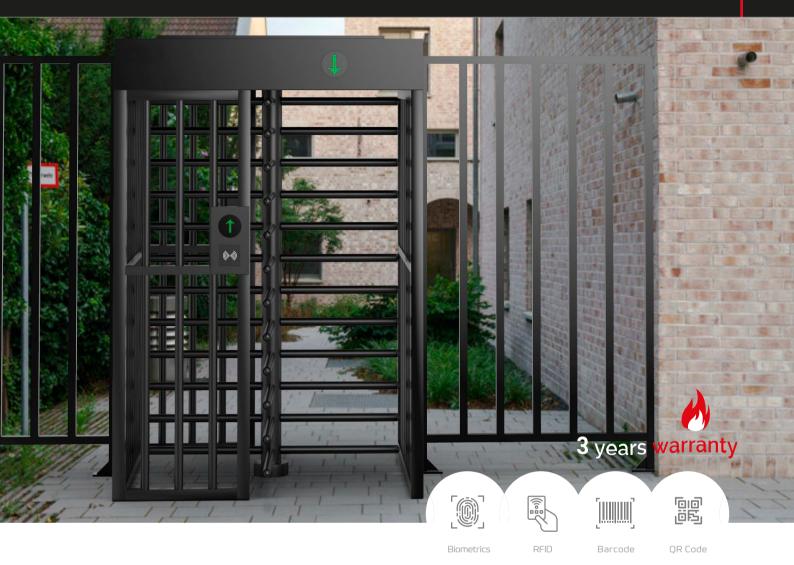

## Qualica-RD SUN

Turnstile with special varnish that provides quality and elegance.

**Qualica-RD SUN QR411 BLACK-BLUE** is a high-tech full-height turnstile, incorporating a solid rain protection roof. Designed for both indoor and outdoor use. Varnished in black or blue.


Stainless steel body, waterproof and durable. Standard dimension of 1.5m x 1.5m. This turnstile can be adapted and customized according to the customer's needs. The mechanism is equipped with self-regulating hydraulic damping device. No noise and no impact during operation.

Ideal for high security areas such as embassies, stadiums, banks, oil fields, construction sites, stations, etc.

# QUALICA-RD SUN QR411 BLACK-BLUE

### **Features**

- Top cover is made of black tempered glass.
- Decorative LED light bar, gives a modern look.
- Automatic reset function: the turnstile arm will automatically lock within 5 sec (can be adjusted) if the passenger delay is given to the entrance.
- Multiple access controller boards, can be connected by TCP/IP through network cable.
- Control by central computer.
- Lathe circuit board is also with RS232 output, can be connected with mini PC.



#### Technical specifications

| Frame material and color | Steel + baked varnish Color: Black or blue                |
|--------------------------|---|
| Arm support              | 120° rotors with 3 sections or 90° rotors with 4 sections |
| Dimensions               | 1500 * 1500 * 2250mm                                      |
| Net weight               | 260kg/unit  |
| Pitch width              | 1 rail, 650mm/rail  |
| Pitch direction          | Monodirectional and Bidirectional                         |
| MCBF                     | 5 million   |
| Power supply             | AC220V/110V, 50/60Hz                                      |
| Operating voltage        | 24V DC  |
| Power consumption        | 40W   |
| Operating temperature    | -15 °C - 60 °C  |
| Operating humidity       | 0 ~ 95% (no freezing)                                     |
| Operating environment    | Indoor / Outdoor  |
| Flow rate                | 35-40 persons per minute                                  |
| LED indicator            | Yes   |
| Emergency                | Automatic opening of the arm when power is cut off        |
| Communication            | Dry contact, relay signal, RS485                          |

#### **Dimensions (mm)**

