





3 years warranty

-  Biometrics
-  RFID
-  Barcode
-  QR Code

# Qualica-RD **SUN**

Maximum security access control solution.

**Qualica-RD SUN QR411** is a full-height turnstile with high technology and smaller dimensions, to adapt to environments with limited space. Designed for both outdoor and indoor use.

Stainless steel body, waterproof and durable. Standard dimension of 1.4m x 1.2m. This turnstile can be adapted and customized according to the customer's needs. The mechanism is equipped with self-regulating hydraulic damping device. No noise and no impact during operation.


Ideal for high security areas such as embassies, stadiums, banks, oil fields, construction sites, stations, etc.



# SUN QR411 Full Height Turnstile

## Features

- Structure to contain the wiring inside the box.
- Arm structure with round stainless steel cover.
- Anti-tail function: only one person passes through at a time.
- Override key function: in case of emergency, control the opening/closing turnstile manually.
- Support any kind of external device solution (Display, Counter, Reader, Face recognition, Push button, Card collector, RFID wristband collector, Coin inserter, Barcode/-QR reader, Wheel).

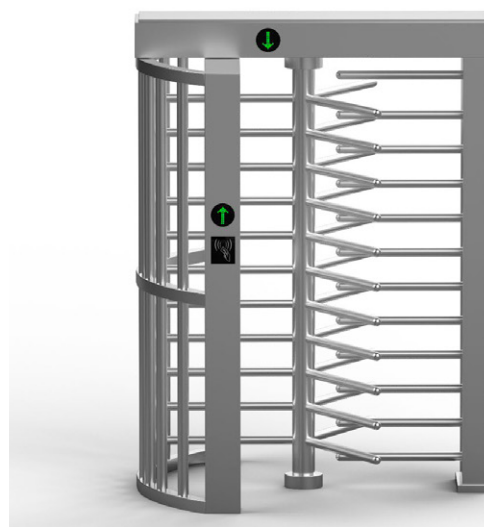

## Technical specifications

<b>Frame material</b>	Full 304 stainless steel
<b>Arm support</b>	120° rotors with 3 sections or 90° rotors with 4 sections
<b>Dimensions</b>	1460 * 1250 * 2180mm
<b>Net weight</b>	180kg/unit
<b>Pitch width</b>	1 rail, 650mm/rail
<b>Pitch direction</b>	Monodirectional and Bidirectional
<b>MCBF</b>	5 million
<b>Power supply</b>	AC220V/110V, 50/60Hz
<b>Operating voltage</b>	24V DC
<b>Power consumption</b>	40W
<b>Operating temperature</b>	-15 °C - 60 °C
<b>Operating humidity</b>	0 ~ 95% (No freezing)
<b>Operating environment</b>	Indoor / Outdoor
<b>Flow rate</b>	35-40 persons per minute
<b>LED indicator</b>	Yes
<b>Emergency</b>	Automatic opening of the arm when power is cut off
<b>Communication</b>	Dry contact, relay signal, RS485

## Dimensions (mm)

