

## Simple to fit



Multi-format proximity reader for use with Paxton Net2 system.

Suitable for use in wet environments.

Readers should not be mounted on metal surfaces, and there should be a minimum of 500mm distance between any two AAProx readers.

For Technical support call **01604 496689**  
Or email [technical@advanced-access.co.uk](mailto:technical@advanced-access.co.uk)


### Reader covers

Additional covers are available in black, white, grey, blue and silver.

### Cable extensions

Readers can be extended using Belden 9540 10-core overall screened cable. The maximum cable length between reader and control unit is 100m.

## Simple to install

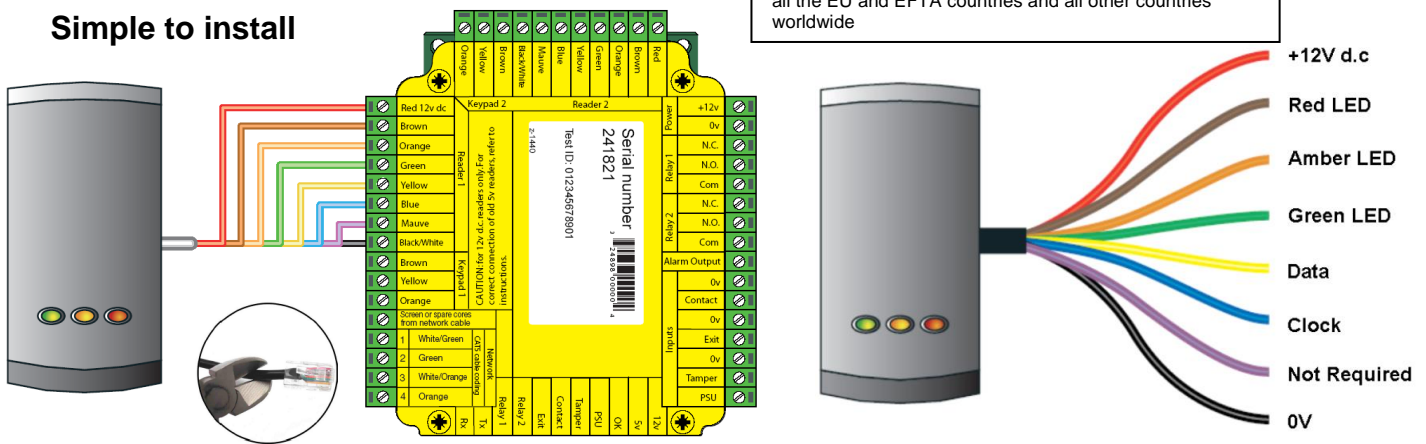

## Specifications

Physical	min	typ	max	units
Dimensions	50 w	100 h	15 d	mm
IP rating		IPX7		Outdoor use
Cable length		5		m
Temperature	-20		70	°C
Features				
Warranty		5		Years
Electrical				
Operating Voltage	8	12	14	V d.c.
Current Consumption	50		120	mA
Carrier frequency		125		KHz

### Currently Compatible Cards/Tokens In addition to our low cost 'AA Prox Cards/Tokens'

Access Control Systems		
PAC	KeyPAC Tokens	Yes
IMPRO	Omega Tag	Yes
TDSI	Proximity Tokens	Yes
Intruder Alarms		
Galaxy (Honeywell)	Keyprox	Yes
Menvier (Coopers)	Coopers Proxtag	Yes
Scantronic (Coopers)	Coopers Proxtag	Yes
Aritech (GE)	CD Prox-key	No
Castle-Care Tech	Eur 023	No
Pyronix	PCX-PTAG	No
Rokonet	Proximity Key Tag	No
Texcom	Proximity Tag	No
Guardtec	G-Tag Fob	No

**Note:-**  
This reader does NOT read Paxton cards or tokens, and is not compatible in the same system with standard Paxton reader technology.

**Advanced Access Ltd**

**Tel: 01604 647555 Fax: 01604 647333 Email: [sales@advanced-access.co.uk](mailto:sales@advanced-access.co.uk)**