




## HIGH OUTPUT FLOODLIGHT

- Aluminium body
- Forged aluminium heat sink
- Tempered glass cover
- Built-in constant current LED driver
- Adjustable bracket
- High efficiency- 120 lumens per watt
- IP65 rated for external use
- IK 08
- Power factor: >0.9
- Non-dimmable
- Surge protection to withstand power fluctuation: L-N 1KV, L/N-G 2KV
- CRI: >80
- Electrical Classification: Class I
- Lifespan: 50,000 hours
- Warranty: 3 years
- Operating ambient temp: -30° to 50°C

# KAKADU

ELF702-100 DL  
ELF702-150 DL  
ELF702-200 DL

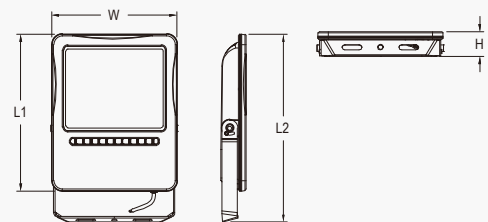

	L1	L2	W	H
100W	300	360	240	48
150W	360	432	288	58
200W	400	478	320	64

unit: mm

## TECHNICAL SPECIFICATIONS

MODEL NO.	INPUT VOLTAGE	POWER	LUMEN	COLOUR TEMPERATURE	BEAM ANGLE	DIMENSIONS (L×W×H)	FITTING COLOUR
ELF702-100 DL	240V	100W	12000lm	5000K	110°	240×300×48 mm	Black
ELF702-150 DL	240V	150W	18000lm	5000K	110°	288×360×58 mm	Black
ELF702-200 DL	240V	200W	24000lm	5000K	110°	320×400×64 mm	Black