

Altus 28 WireFree Li-ion RTS V2

PRODUCT SPECIFICATIONS



Designed for convenience and simplicity

New motor in the WireFree range, for residential small to medium blinds.

Lithium-ion +

Embedded battery motor:

- All-in-one
- Aesthetic
- Compact and light
- Battery power indicator
- Easy recharging



Built-in battery motor

Powered by a compact and light lithium-ion battery.



"my" favourite

In one click move the blind to your favourite position.



WireFree

For quicker installation.



Compatible with Situo Variation functions



Soft start and soft stop




Adjustable speed

From 10 to 28 rpm.




Information feedback

Low battery indicator on the controller interface and easy re-setting.



Thin head

White and thin round head for discreet blending.



Slats tilting



somfy®

Altus 28 WireFree Li-ion RTS V2

PRODUCT SPECIFICATIONS



BENEFITS FOR PROFESSIONALS

Easy integration

- Attached external antenna
- Sleep mode to prevent motor from unwanted pairing

Simple installation

- Programming button and LED on motor head interface
- Program end limits via transmitter
- No need to have electrical knowledge
- WireFree motor for quick installation

BENEFITS FOR END USERS

Daily convenience and control

- Smooth motion with adjustable speed
- Move your blinds effortlessly and remotely thanks to radio control
- Move your blind in one click to your favourite 'my' position

Easy use and maintenance

- Rechargeable battery
- Low battery LED indicator


COMPATIBLE END PRODUCTS For interior applications only.




Roller Blinds



Roman Blinds*



Pleated and cellular*



Zebra



Sheer



Venetian*

TECHNICAL DATA

Voltage Supply	12V DC
Index Protecting Rating	IP 20 (for indoor use only)
Limit Switch Type	Electronic
Temperature Working Range	0°C to 45°C
Temperature Storage Range	-20°C to 60°C
Insulation Class	Class III
Antenna	24 cm wire length must not be cut or lengthened. For greatest RF range, it must not be exposed and should not come in contact with metal surfaces. RF wire may need to be repositioned for optimal performance.


PERFORMANCES

Nominal Torque	1.5 Nm
Nominal Speed	20 rpm
Adjustable Speed	10 – 28 (by 2 rpm increments)
Sound Level	54 dBA (at nominal speed)
Radio Protocol	RTS
Radio Frequency	433.42 MHz
Battery Lifetime	9 Months (with single up and down cycle per day)
Power Supply	Li-ion embedded battery
Low Battery Indicator	LED
Capacity of Memory	12 Transmitters and 3 Sun Sensors
Item Number	1241151

* Using CTS40

DIMENSIONS

L (mm): 543mm
Tube min Ø (int): 26.6 mm

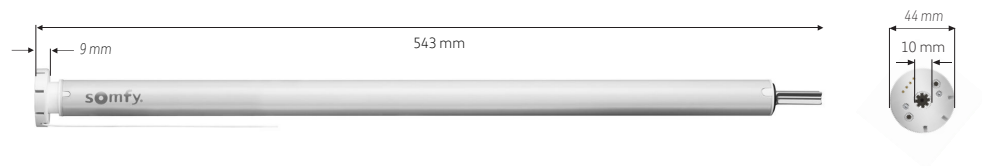

WIREFREE PARTS AND ACCESSORIES

These items have to be ordered separately	Accessories available:
9021131 20cm Ext Cable for Li-ion for Cassette (V2)	9021018 Sonesse 30 WF Acmeda Sys45 Crown and drive
9025293 WF Li-ion Solar Panel (Solar Pack)	9021036 Sonesse 30 WF Acmeda Sys45 Heavy Crown and drive
	9021037 Sonesse 30 WF HD Quantum Crown and drive
	9020699 Sonesse 30 WF HD 37 mm Crown and drive
	9020674 Sonesse 30 WF Rollease 1.5/38 mm Crown and drive
	9020675 Sonesse 30 WF Louvolite 40 mm Crown and drive
	9020676 Sonesse 30 WF to 400s adapter kit

Version 4: March 2022

SOMFY Pty Limited – ABN 77 003 917 244 – 20/38-46 South St, Rydalmere NSW 2116 – T +61 (0)2 8845 7200 – somfy.au@somfy.com

