

# Sonesse 40 RTS

PRODUCT SPECIFICATIONS



# Putting window coverings in motion with quiet precision

## PRODUCT MAIN FUNCTIONALITIES



**Designed for silence**



**Remote limit setting**



**Compatible with Solar protection functions**



**"my" favourite**  
In one click move the blind to your favourite position.



**Slats tilting**




**Round head**  
for reduced dimensions.

## Somfy+

Quiet operation and all the benefits of RTS technology.

### RECOMMENDED TO SET WITH:

Universal test lead  
(ref. 9027064)

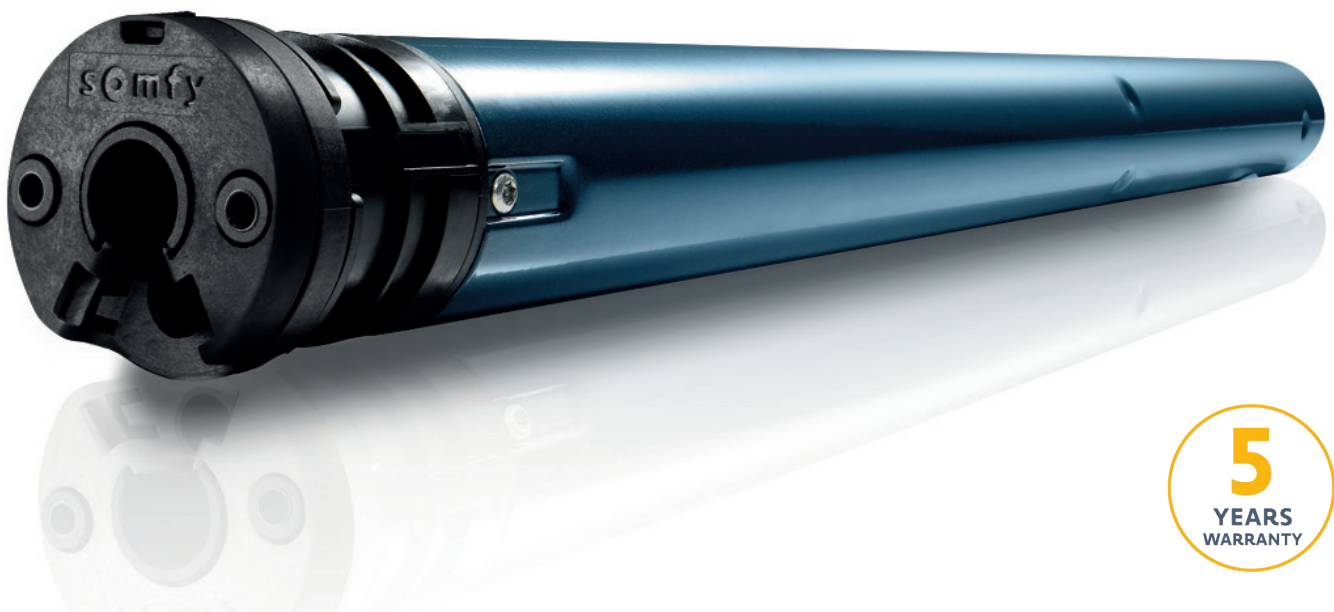

**somfy**

# Sonesse 40 RTS

## PRODUCT SPECIFICATIONS



### BENEFITS FOR PROFESSIONALS

#### Easy Integration

- Suitable for tubes diameter 40 mm or more (internal diameter)
- Available with inline connector for ease of programming
- Integrated antenna

#### Setting from a distance

- Up and down end limits set by remote control
- Visual feedback of the product to confirm any step of setting and programming

### BENEFITS FOR END USERS

#### Simple, effortless control

- Quiet operation
- Move your blinds effortlessly and remotely thanks to the radio control
- Move your blinds to your favourite "my" position in one click

#### Access to RTS product range for more benefits

- Solar protection functions compatibility


### COMPATIBLE END-PRODUCTS



Roller blinds




Roman blinds




Projection screens



Pleated and cellular\*



Sheer



Venetian\*



Zebra

\* Using CTS40

### TECHNICAL DATA

<b>Thermal Time</b>	4 minutes
<b>Supply</b>	AC
<b>Index protection rating</b>	IP 44 (indoor use only)
<b>Limit switch unit</b>	Electronic
<b>Limit switch capacity</b>	250 turns
<b>Temperature working range</b>	0°C to +60°C
<b>Electric insulation</b>	Class II
<b>Capacity of memory</b>	12 different transmitters plus 3 wireless sensors
<b>Coding</b>	Rolling code with 16 million possibilities

### PERFORMANCES

	3/30	6/20	9/12
<b>Nominal Voltage</b>	230V / 50Hz		
<b>Torque (Nm)</b>	3	6	9
<b>Speed (rpm)</b>	30	20	12
<b>Rated Current (A)</b>	0.44	0.55	0.98
<b>dBA</b>	42	45	40
<b>End-limit unit versions available</b>	RTS	RTS	RTS
<b>Radio Frequency</b>	433, 42 MHz		
<b>Item Number</b>	1001573	1001577	1001581
<b>Item Number with inline connector</b>	1002091	1002092	1002157

### 230 V

