

SPECIFICATION SHEET

RELAY PART NAME:

Hard wired, remotely operated switch **DESCRIPTION:**

HUSA05 PART No:

902 MHz FREQUENCY:

2.78" x 1.65" x 1.1" (73 x 42 x 28mm) **DIMENSIONS:**

FCC SZV-STM300U (USA) **CERTIFICATIONS:**

IC 5713A-STM300U (Canada)

Line Voltage: 120, 208 and 240 volts

16 Amps Maximum Current::

FEATURES: ON/OFF control of the heater Timer OFF function, 15, 30, 45, 60 minutes.

Can be controlled by multiple switches and remote controls.

Adjustable antenna

Can be mounted inside a standard junction box, Attached using a standard knockout and thread connector with nut (included).


The Relay is to be mounted indoors only and protected from the environment.

Use a non-metal electrical enclosure for best RF transmission.

Install in a suitable location taking care with interference through walls and other obstacles.

Note: See the Product Manual for more detail

NOTE: To be used with wall switch HUSA03 or HUSA04 and optional remote control **HUSA06**

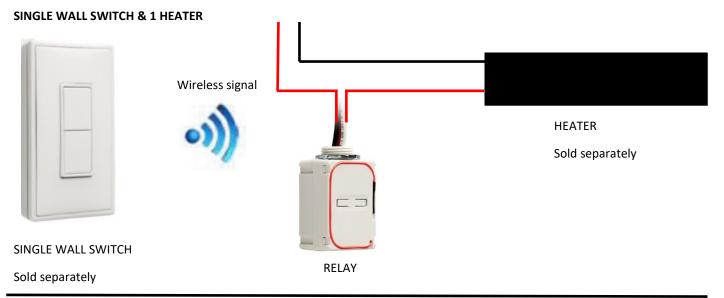

Heatstrip USA LLC.

4275 Executive Square

616 Corporate Way,

1-877-222-0063 (Toll Free)

Suite 2-5771,

www.heatstripusa.com

Valley Cottage, NY 10989

La Jolla, CA, 92037 info@heatstripusa.com

#200

