




ASD Bypass Shower Door

Frame Type	Door Opening	/	Glass Thickness	Hardware Finish	Hardware Materials
Frame	Bypass	/	(5/16") 8MM	Chrome	Aluminum
Certified Glass	iStyle Exclusive KlearTeck	Regular Maintenance	Threshold	Adjustment Width	Warranty
Certified SGCC/ANSI/CAN /CGSB/CFR Tempered Clear Safety Glass	Resistant Glass Coating / Repels Water Mark / Leaves NO Water Mark / Clean Looking	Non-abusive chemical, Spray with vinegar + water, Rinse off with clean water. Dry with Squeegee.	Minimum 3" Threshold Depth (Saddle) for proper installation	Stainless Steel Top Guide & Bottom Trimmed up to 5"	10 Years Limited Warranty. See details on bottom.

10 Year Limited Warranty on all hardware parts. Excluded tempered glass, damage incurred during installation, labor & shipping fee.

Configuration

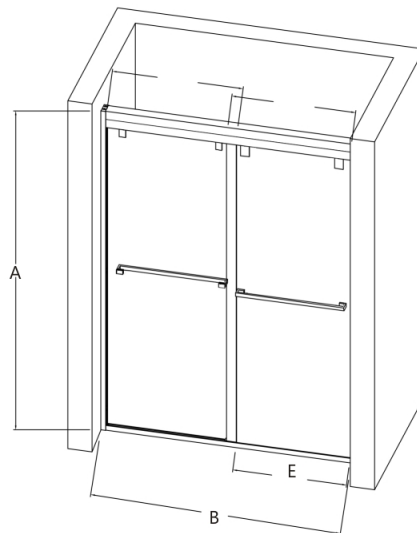

Bypass Door

Additional Features



Model#	B (Width) x A (Height)	Color	Glass Thickness	MSRP	E: Entrance Opening
ASD-4876C	44" - 48" W x 76"H	Chrome	(5/16") 8MM	\$625	E: 16-1/2" - 20-1/2"
ASD-5476C	49" - 54" W x 76"H	Chrome	(5/16") 8MM	\$625	E: 19"-24"
ASD-6076C	55" - 60" W x 76"H	Chrome	(5/16") 8MM	\$625	E: 21-3/4"-26-3/4"
Tub Door ASD-6060C	55" - 60" W x 60"H	Chrome	(5/16") 8MM	\$625	E: 21-3/4"-26-3/4"