




Maxfield™ Underwater Light

INSTALLATION INSTRUCTIONS

Part#: 69686-XX

PARTS / TOOLS NEEDED:

			Butt Splices & Application Specific Sealant (not provided)
Underwater Light	RGB Controller (RGB version only)	Power Drill w/ Hole Saw Bit	


Safety Instructions

- Disconnect power before installing, adding or changing any component.
- To avoid a hazard to children, account for all parts and destroy all packing materials.
- Do not install any luminaire assembly closer than 6" from any combustible materials.
- Positive (+) outputs require a fuse if the attached wire leads are not rated to handle the max current.

1. Determine the installation location drill a 29/32 or 55/64 hole for wire then align the light in the wire hole and use the light to mark screw holes. Light is designed to accept #8 oval head screws.



3. Feed the wires back through the hole and use application specific sealant in the specified circled areas both below and on top of the rubber.

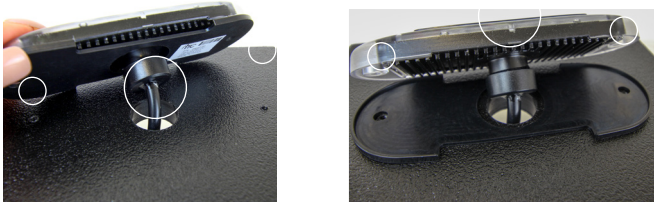


4. Press the light onto the rubber gasket then screw the light in place. Note, the light can be installed with or without the bezel.




2. Follow the wiring diagram below to wire the light to your system.

Single Color Light

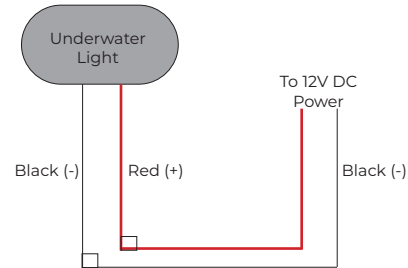


RGB Light

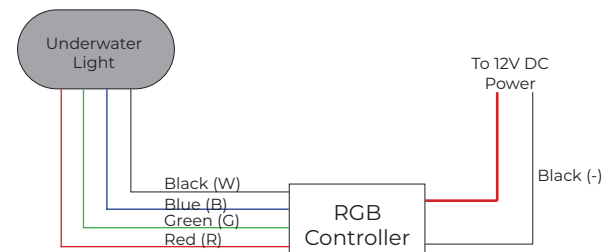


NOTE: Be sure the sealant does not block the heat sink channels

INCORRECT

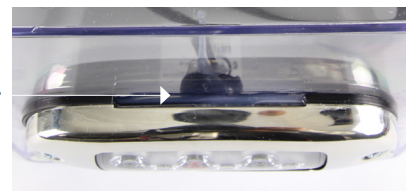

CORRECT

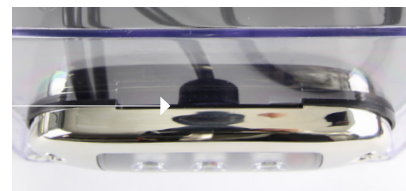

3030 Corporate Grove Dr.
Hudsonville, MI 49426
Phone: 616.396.1355
itc-us.com

For warranty information please visit www.itc-us.com/warranty-return-policy
DOC #: 710-00119 · Rev C · 02/24/22