



Exterior LED Docking/Flood Light Installation Instructions

(Part #'s 69724 and 69725)



Product Safety Instructions

IMPORTANT SAFETY INSTRUCTIONS. READ CAREFULLY FOR YOUR PROTECTION AND SAVE ALL INSTRUCTIONS.

- *Disconnect power before installing, adding or changing any component.
- *To avoid a hazard to children, account for all parts and destroy all packing materials.
- *Do not install any luminaire assembly closer than 6" from any curtain or other combustible material.

SERVICE

There are no user-serviceable parts inside. Opening unit will void warranty.

WARRANTY

For information on our warranty policy please visit our website at <http://www.itc-marine.com/resources/warranty/>

Installation Instructions:

TO USE AS BRACKET MOUNT:


- Step 1: Disassemble light from bracket by removing set screws on side of light
- Step 2: Drill a 3/4" hole into mounting surface
- Step 3: Feed wire through center hole on mounting bracket, and attach wires to power source (red is positive and black is neutral)
- Step 4: Install provided screws through mounting plate into deck and tighten securely
- Step 5: Reinstall light to bracket with side set screws

TO USE AS RECESSED MOUNT:

- Step 1: Remove bezel if not already disassembled.
- Step 2: Determine the installation location for your light. Once determined Use 3/4" hole saw spaced 1.75" apart on center. Connect holes to create 2.5" installation cutout.
- Step 3: Connect wires to power source.
- Step 4: Feed wires back through the hole and screw the light in place using the screws provided.
- Step 5: Reattach bezel.

**All electrical connections should be made inside a watertight junction box.

**LEDs are polarity sensitive and will not light if not attached properly.

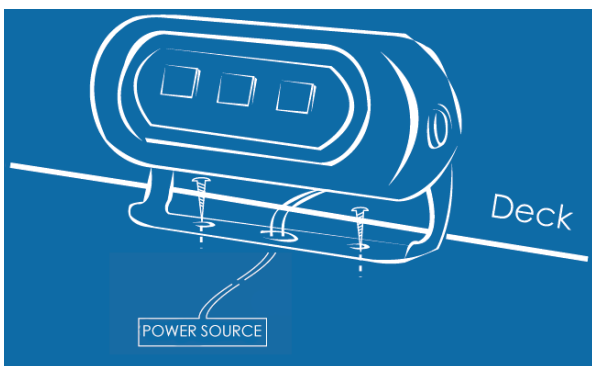

Installation Diagram

[Recess or Shallow Recess Mount]

