



Chevrolet Equinox 2005-2009

PART NUMBER: CV-72-05-L



PLEASE READ COMPLETE INSTRUCTIONS BEFORE INSTALLING THIS Pro.Fit Legend.

All instructions assume a drivers seat vantage point. Caution is advised when removing and reassembling wood or plastic parts of a dash. Applying unnecessary force or pressure may cause a piece to crack or break.


TOOLS REQUIRED: Dash Trim Removal Tool (DM-40-22), 7mm nut driver

PARTS INCLUDED: Pro.Fit Legend, instructions

LOCATION: Right of radio


STEP 1.

Set parking brake and place gear shift into low. Insert dash trim tool behind lower-left corner of gear shift bezel. **Photo 1.** Pry downward to release retainer clip. The bezel extends from the gear shift to above the air vents. Work the tool clockwise around the bezel until all clips are released and bezel is completely loose. Do not disconnect any bezel wiring.

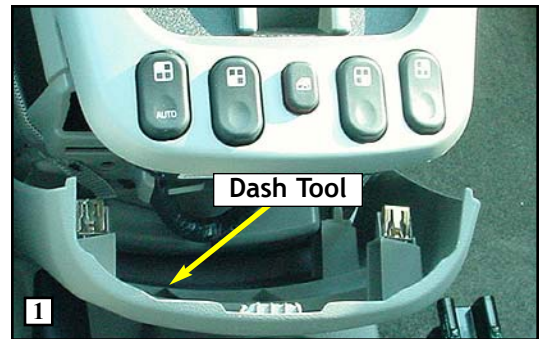

STEP 2.

Remove a 7mm bolt from each corner of the radio. Pull radio out slightly. Carefully slide bezel to left to gain access to top-right radio bolt hole. **Photo 2.** Place Legend mount holes behind the radio, placing bottom hole over radio alignment pin. Align the top mounting hole over the 7mm bolt hole. Insert bolt and tighten. Re-install remaining radio bolts.

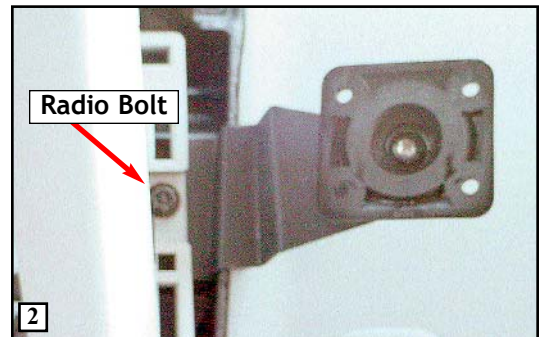

STEP 3.

Re-assemble the dash in reverse order, remembering to put gear shift into park. This completes the installation of your Legend.



Pro.Fit International, Inc.® may not be held liable for any damage to a vehicle before, during or after the installation or removal of this Pro.Fit Legend. Pro.Fit may not be held liable for any personal injury resulting from accident or improper installation. Pro.Fit International, Inc.® 1335 Eagandale Court, Eagan, MN 55121, Ph: 651-688-3588 or 800-388-0073 Fx: 651-688-9876

Installation Difficulty

● ● ● ○ ○
Simple Advanced

© Pro.Fit International, Eagan, MN 2005

VIEW INSTRUCTIONS & UPDATES
ONLINE @
WWW.PRO-FIT-INTL.COM