



# Dodge Caliber 2007-2009

PART NUMBER: DG-53-07-G3



## PLEASE READ COMPLETE INSTRUCTIONS BEFORE INSTALLING THIS VSM G3

All instructions assume a drivers seat vantage point. Caution is advised when removing and reassembling wood or plastic parts of a dash. Applying unnecessary force or pressure may cause a piece to crack or break.

**When properly installed, the metal between the ball and 2 small holes is all that is exposed.  
(Some exceptions apply).**

**TOOLS REQUIRED:** Dash Trim Removal Tool (DTRT), 5/64" drill bit and drill, marking pen, Phillips screwdriver

**PARTS INCLUDED:** VSM G3, A Plate, J Stem, two (2) 8 x 1/2" screws


**LOCATION:** Right of radio

**STEP 1.** Apply the parking brake and place the vehicle in neutral. Insert and use the DTRT in a gentle twisting motion to release the four (4) clips securing the shift lever bezel to the dash molding. Do not remove shift bezel; instead carefully turn it to the side so it is out of the way.

**STEP 2.** Insert the DTRT in the lower right hand corner of the dash bezel surrounding the radio and climate control. Begin working the tool around the radio bezel in a counter-clockwise rotation around the dash, releasing all eight (8) clips securing the radio bezel. Gently pull out the radio bezel and move it out of the way. Do not disconnect wiring; simply configure its placement to allow you sufficient space for installing the VSM G3.

**STEP 3.** Place the VSM G3 flush up against the dash molding as pictured in Photo two (2). Using the VSM G3 as a guide, mark the pilot holes with a marking pen. Drill out the marked areas with a 5/64" drill bit and drill; be careful not to drill too deep! Place the VSM G3 over the pilot holes and secure them to the dash molding with the two (2) provided 8 x 1/2" screws. Once the VSM G3 is secured and flush to the dash, begin assembling the dash in the reverse order it was disassembled. You have successfully installed your VSM G3!

Note: See the Assembly Instructions for G3 Components for additional information.

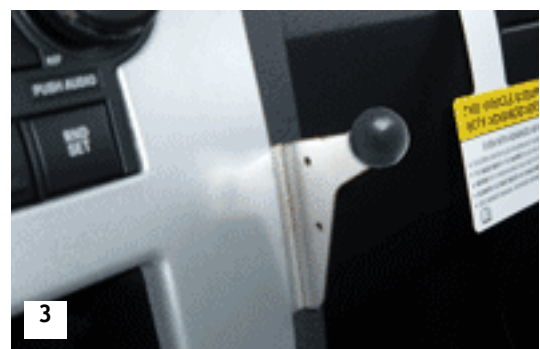

Pro.Fit International, Inc.® may not be held liable for any damage to a vehicle before, during or after the installation or removal of this VSM G3™. Pro.Fit International may not be held liable for any personal injury resulting from accident or improper installation. Pro.Fit International, Inc.® 1335 Eagandale Court, Eagan, MN 55121, Ph: 651.688.3588 or 800.388.0073 Fx: 651.688.9876

Installation Difficulty  
 ● ● ● ○ ○  
 Simple Advanced

© Pro.Fit International, Eagan, MN 2008

View Instruction & Updates  
 Online at  
[www.pro-fit-intl.com](http://www.pro-fit-intl.com)