

Hyundai Elantra 2011-2016

PART NUMBER: FO-75-04-L

PLEASE READ COMPLETE INSTRUCTIONS BEFORE INSTALLING THIS VSM Legend

All instructions assume a driver's seat vantage point. Caution is advised when removing and reassembling wood or plastic parts of a dash. Applying unnecessary force or pressure may cause a piece to crack or break.

When properly installed, the metal between the ball and the small hole is all that is exposed. (Some exceptions apply).

TOOLS REQUIRED: Dash Trim Removal Tool (DTRT), Phillips head screwdriver

PARTS INCLUDED: VSM Legend, 1 washer


LOCATION: Right of Climate Control

Step 1: Using a DTRT remove right trim and vent bezel that are held with retainer clips.

Step 2: Remove the screw just to the right of the recirculation and rear defrost buttons.

Step 3: Place screw through mount screw hole then place the washer on the screw. Now, attach mount to the screws from the previous location.

Step 4: Reattach vent and trim.

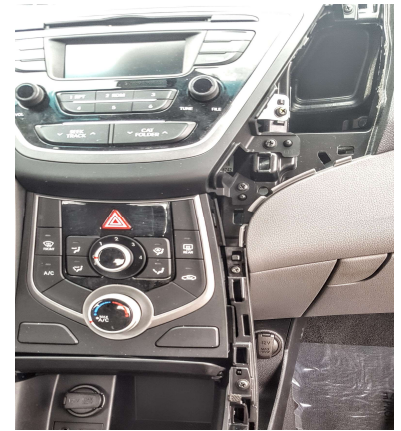

Pro.Fit International, Inc. ® may not be held liable for any damage to a vehicle before, during, or after the installation or removal of this VSM G3. Pro.Fit International may not be held liable for any personal injury resulting from accident or improper installation.

Pro.Fit International, Inc. ® 221 1st Street South, Montgomery, MN 56069, Ph: 507.364.7773 or 800.388.0073

Installation Difficulty



Simple

Advanced

©Pro.Fit International, Inc. Montgomery, Minnesota 2017

[View Instructions &
Updates Online at
www.pro-fit-intl.com](http://www.pro-fit-intl.com)