



Honda CRV (2002-2006)

PART NUMBER: MV-50-03-L



PLEASE READ COMPLETE INSTRUCTIONS BEFORE INSTALLING THIS Pro.Fit Legend.

All instructions assume a drivers seat vantage point. Caution is advised when removing and reassembling wood or plastic parts of a dash. Applying unnecessary force or pressure may cause a piece to crack or break.

TOOLS REQUIRED: #2 Phillips screwdriver, drill and 5/64" bit, Dash trim removal tool (DM-40-22), 10mm

PARTS INCLUDED: nut driver, marking pen


Pro.Fit Legend, instructions, two (2) # 8 x 1/2" screws.

LOCATION: Left or Right of radio


STEP 1. Remove two (2) # 2 Phillips screws from the bottom of the air vent assembly. Pull vent out and let hang down. Next, remove the radio trim bezel. (Photo 1.) Insert a trim tool behind the upper right corner of the bezel and gently pry outward, releasing a retainer clip. Work the trim tool around the bezel until all clips are released. Set bezel aside.



STEP 2. Hold the Legend above the clip hole and 1/8" away from the dash pad. (Photo 2.) Using the Legend as a guide, mark the location of two (2) screw holes. Set Legend aside. Drill two (2) pilot holes at the marked location using a 5/64" drill bit and drill. Align the Legend over the pilot holes, insert two (2) # 8 x 1/2" screws and tighten.

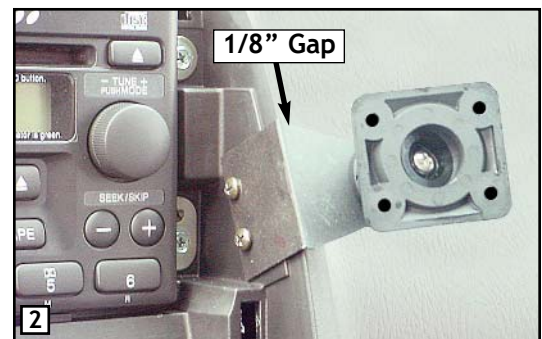

STEP 3. Re-assemble the dash in reverse order. This completes the installation of your Legend.

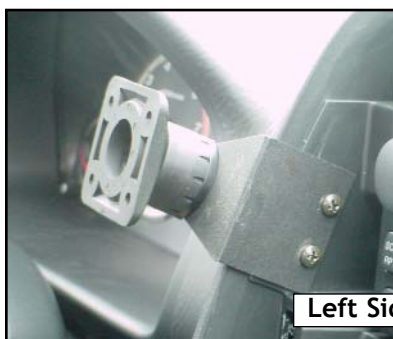

Pro.Fit International, Inc.® may not be held liable for any damage to a vehicle before, during or after the installation or removal of this Pro.Fit Legend®. Pro.Fit may not be held liable for any personal injury resulting from accident or improper installation. Pro.Fit International, Inc.® 1335 Eagandale Court, Eagan, MN 55121, Ph: 651-688-3588 or 800-388-0073 Fx: 651-688-9876

Installation Difficulty

● ● ○ ○ ○
Simple Advanced

© Pro.Fit International, Eagan, MN 2006

VIEW INSTRUCTIONS & UPDATES
ONLINE @
WWW.PRO-FIT-INTL.COM