

LED-AROUND | CUSTOM BUILT

Showroom Lampertz Stone Designer,
Luxembourg

ARCHITECT
frei(Raum)architekten, Luxembourg

ILLUMINATION AND FLUOROSCOPY
Even and homogeneous illumination of showcases and stone walls



LED-AROUND | CUSTOM BUILT

KPMG Headquarter,
Kirchberg/Luxembourg

ARCHITECT | ELECTRICAL PLANNING

Valentiny hvp, Luxembourg | Jean-Schmit Engineering, Luxembourg



Task

Partial illumination of the façade of the building.

Solution

28 diamond shapes in the Corten steel façade are illuminated with LED-Around. This ensures that the external, characteristic façade structure, the overall architecture and its dimensions are also clearly visible during the hours of darkness. This could be achieved without the need to illuminate the whole building.

Technical Information

28 diamond shapes

Colour Temperature: RGB

IP Rating: IP65

Power Consumption: 15W/m

Installation moulding made of aluminium for inner cable run

Dimensions: Luminaire 20 x 100 mm
with housing 35 x 100 mm

Colour: E6C33 bronze anodised



LED-AROUND | CUSTOM BUILT

Residential and Office building,
Mülheim an der Ruhr

LIGHT PLANNER
Max Magis, Stolberg

ENTRANCE AREAS
Illumination for the entrance areas



LED-AROUND | CUSTOM BUILT

Residential and Office building,
Mülheim an der Ruhr

TECHNICAL SPECIFICATION



Task

Illumination of the two entrance areas barely visible from the street to create a welcoming and safe atmosphere in the night and the dark season.

Solution

From the application of glare-free LED-Around results a perfect light homogeneity and achieves a optimum illumination of both entrance areas offering a warm welcome.

Technical specification

6 units of LED-Around for 2 entrances

Colour Temperature: White, 4,000 Kelvin




IP Rating: IP54

Power Consumption: 38W/unit, dimmable

Installation moulding made of aluminium for inner cable run

Dimensions: Luminaire 1,085 x 250 mm and 912 x 250 mm

Colour: RAL 7015 powder-coated

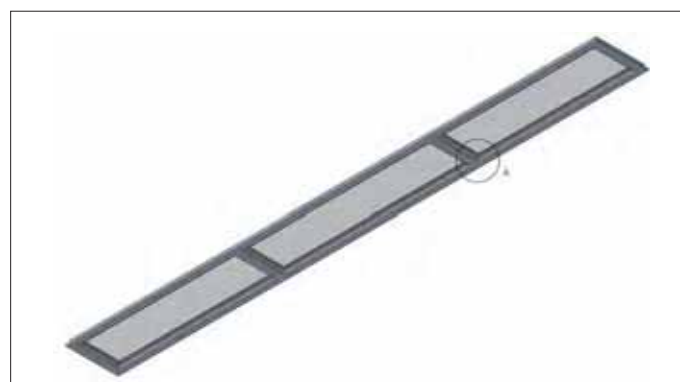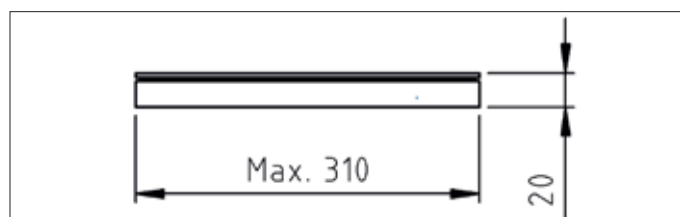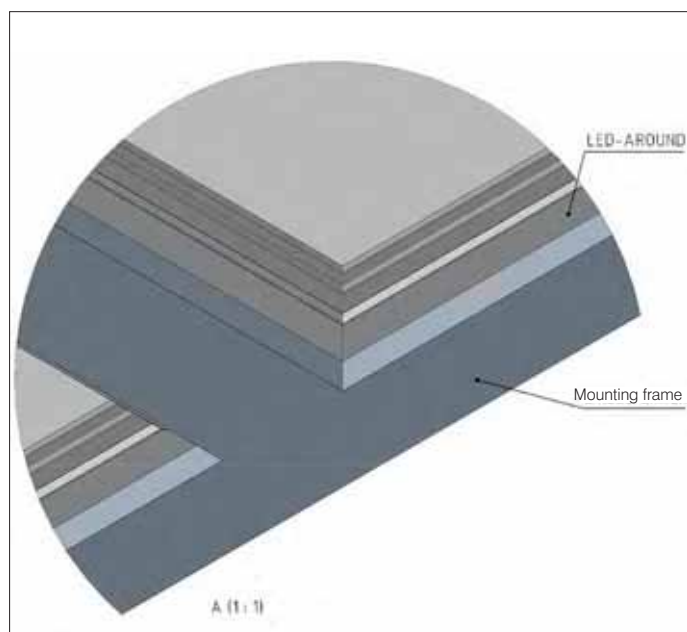

LED-AROUND | CUSTOM BUILT

Pendant Luminaire, circular

CUSTOM BUILT PRODUCT



LED-AROUND | CUSTOM BUILT

Pendant Luminaire, circular

TECHNICAL SPECIFICATION



Technical specification

2 LED-Around Pendant Luminaires, circular with cable suspension

Colour Temperature: White, 3,000 Kelvin

IP Rating: IP20

Power Consumption: 45W/Luminaire, dimmable

Dimensions: Luminaire \varnothing 600 mm, 20 mm height

Colour: RAL 9006 powder-coated matte

LIGHT SPREAD | LED-Around | Pendant luminaire, circular

