

# LED-AROUND

Standing Luminaire

ADO *Lights*

PICTURES



 **FRAMELIGHT**

[sales@framelight.com.au](mailto:sales@framelight.com.au) | [framelight.com.au](http://framelight.com.au)

# LED-AROUND

## Standing Luminaire



### BASE INFORMATION AND GENERAL TECHNICAL SPECIFICATIONS



## LED-Around | Light in all directions


Combining sophistication and efficiency. Upward and downward light radiation. Ensures homogeneous, glare-free illumination. Fully transparent when switched off. LED Around is useful everywhere, in offices and administrative buildings, in show rooms and private residences.

As a freestanding luminaire, LED Around is a true all-rounder: it can provide radiant, glare-free but still subdued lighting. A captivating product – thanks to its minimalist design and high-quality finish.

### Features

- For offices, showrooms, hotels, laboratories, shop floors and private residences
- Narrow light colour tolerances
- Direct/indirect light extraction; optional direct light extraction with reflector
- Perfect homogeneous light spread
- Glare-free
- Steplessly dimmable and suitable to VDU workstations

<b>DIMENSIONS [L X W X H]</b>	<b>HEAD:</b> 610 x 320 x 20 mm <b>BASE:</b> 420 x 320 mm <b>TOTAL HEIGHT:</b> 1,950 mm
<b>POWER CONSUMPTION</b>	max. 85 W
<b>LUMINOUS FLUX</b>	Module efficiency 196 lm/W Direct/indirect 6,997 lm/4.665 lm At 100 % direct 11,662 lm Nominal luminous flux 16,660 lm
<b>OPERATING VOLTAGE</b>	230 V
<b>SEVICE LIFE</b>	LED 50.000 hours at 70% of mean luminous flux
<b>COLOUR TEMPERATURE</b>	White   3,000/4,000 Kelvin
<b>CRI</b>	CRI > 85 Narrow colour tolerance MacAdam Step 3
<b>NORM/PERFORMANCE</b>	UGR < 19   L65 < 1,500 cd/m <sup>2</sup> according to EN 12464-1:2011
<b>IP RATING</b>	IP20
<b>LUMINAIRE HOUSING</b>	<b>HEAD:</b> Aluminium anodised or black anodised <b>PIPE:</b> Aluminium anodised or black anodised <b>BASE PLATE:</b> Aluminium anodised or black anodised; weighted down with steel plate
<b>CONVERTER</b>	Overload protection Overtemperature protection Short-circuit protection Dimming adjustable for DC-mode
<b>OPTIONS</b>	Presence detector Cluster switches Daylight sensor
<b>WEIGHT</b>	18 kg

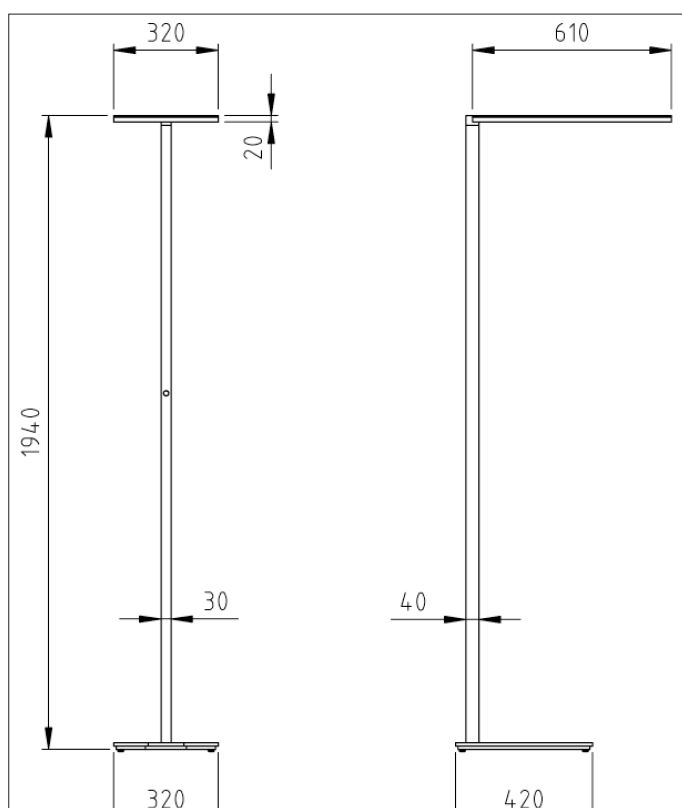

Subject to technical changes - Issued 08/2018