

# LED-LIGHT LINE AL

Recessed Luminaire | Aluminium

Standard/High-power/RGB



PICTURES



# LED-LIGHTLINE AL

## Recessed Luminaire | Aluminium

### Standard/High-power/RGB



#### BASE INFORMATION AND GENERAL TECHNICAL SPECIFICATIONS



## LED-LightLine | Eye-catcher + Signpost

Luminous lines when darkness falls. Sometimes an eye-catcher. At other times showing the way. They accentuate entrance areas or emphasize architectural contours. Lightlines can be integrated in façades and floor spaces – they are always an optical highlight.

### Features

- For public spaces, façades, entrance areas
- Straight or curved versions
- Safe to walk or drive in for vehicles with air-filled tires
- Implementation in variable applications from user-friendly small applications to building automatism systems
- Perfect homogeneous lighting
- Light colours monochrome, optional standard: multicolor



<b>DIMENSIONS [W X H]</b>	12 x 30 mm   Rectangular profile
<b>POWER CONSUMPTION</b>	STANDARD: 19.2 W/m   14.4 W/m [RGB] HIGH-POWER: 38 W/m
<b>LUMINOUS FLUX</b>	STANDARD: Module efficiency 75 lm/W Luminous flux 450 lm Nominal luminous flux 1,280 lm HIGH-POWER: Module efficiency 100 lm/W Luminous flux 1,160 lm Nominal luminous flux 3,320 lm
<b>SERVICE LIFE</b>	LED and EVG 50.000 hours at 70% of mean luminous flux
<b>COLOUR TEMPERATURE</b>	STANDARD: White   2,700/3,000/3,500/4,000 Kelvin optional RGB HIGH-POWER: White   2,700/3,000/3,500/4,000 Kelvin
<b>CRI</b>	CRI > 85
<b>CONTROL INTERFACE</b>	with ballast compatible to any interface as i.e. DMX512, DALI, EIB etc.
<b>IP RATING</b>	IP68
<b>CERTIFICATES</b>	CE, RoHs
<b>LUMINAIRE HOUSING</b>	Aluminium anodised
<b>COVER</b>	High-quality, opaque polyurethane seal
<b>OTHER</b>	Ambient temperature -25 °C up to +50 °C Connection cable with plug connection IP67 suitable for mounting in the ground, mounting profile made of aluminium or stainless steel
<b>WEIGHT</b>	0.75 kg/m

# LED-LIGHT LINE AL

Recessed Luminaire | Aluminium  
Standard/High-power/RGB



TECHNICAL DRAWINGS




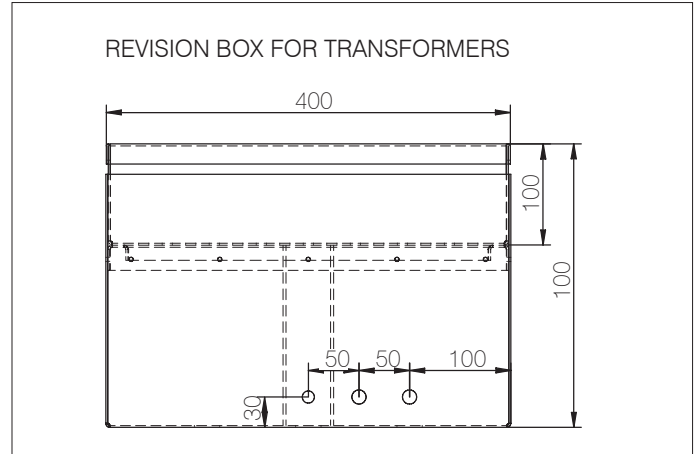
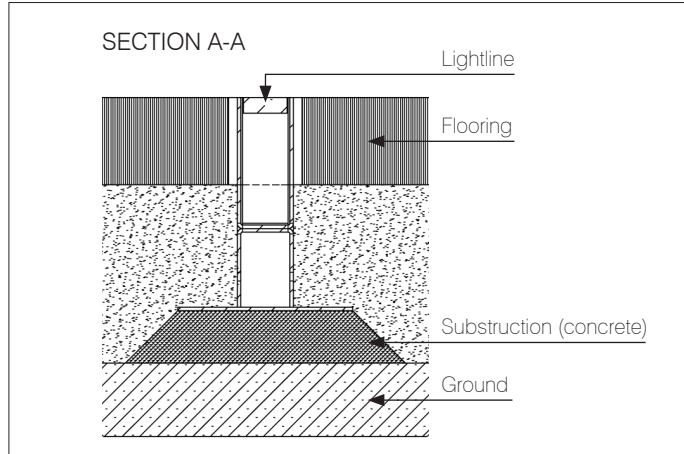


# LED-LIGHT LINE AL

Recessed Luminaire | Aluminium  
Standard/High-power/RGB



TECHNICAL DRAWINGS | SUB-CONSTRUCTIONS

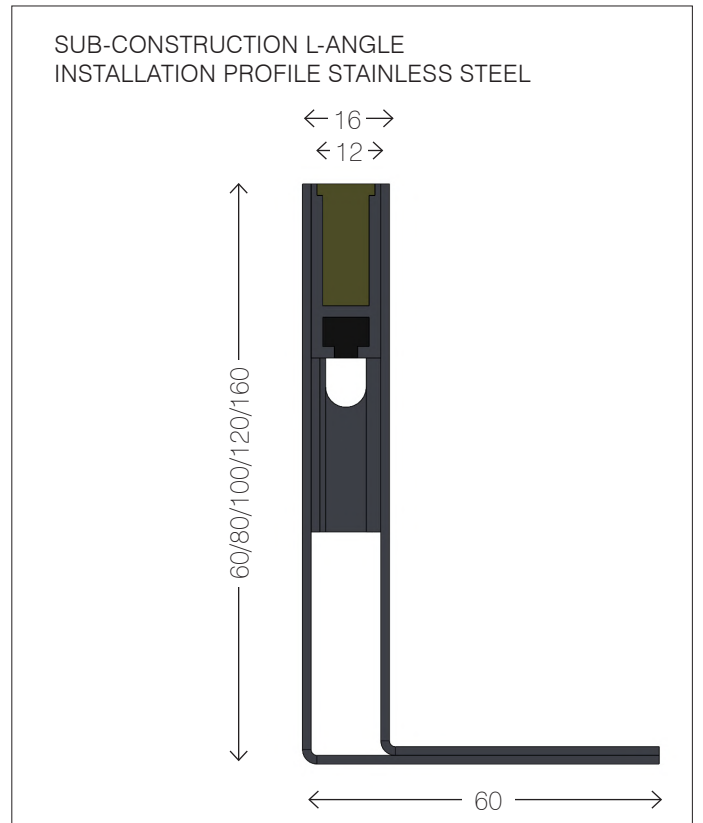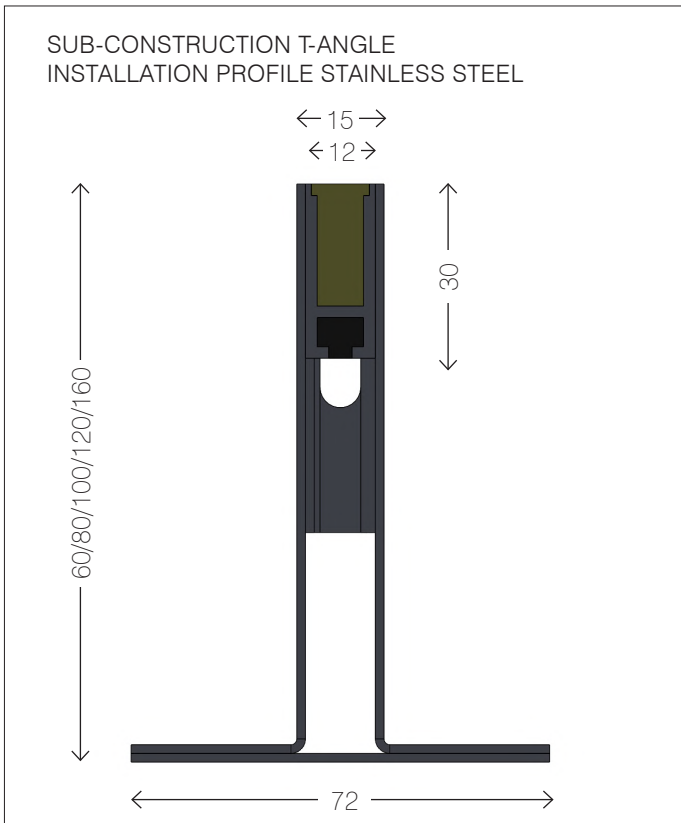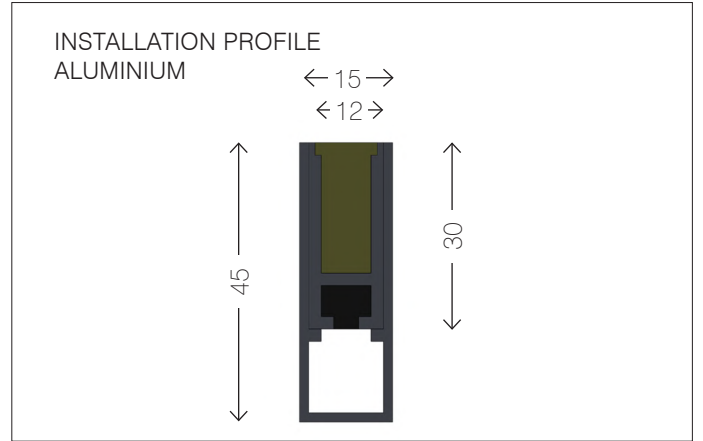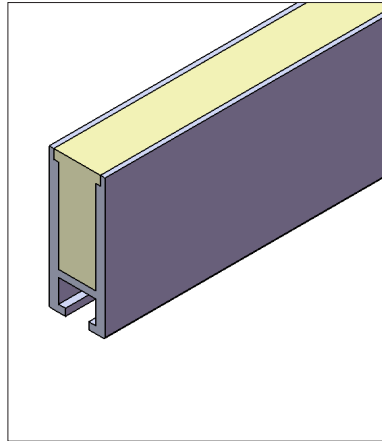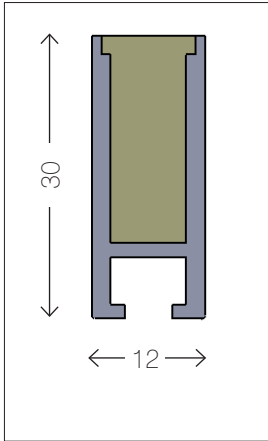

Subject to technical changes · Issued 11/2018