


# LED-Starlight FR 40 | 60



<b>Dimensions [ø x h]</b>	105 x 89 mm   130 x 74 mm
<b>Power consumption</b>	max. 7 W   10,5 W
<b>Luminous flux</b>	500 lm   950 lm
<b>Beam angel</b>	34°   40°
<b>Service life</b>	LED: 50.000 hours at 70% of mean luminous flux
<b>Color temperature</b>	white 2.700, 3.000 or 4.000 Kelvin
<b>CRI</b>	CRI > 90
<b>Control interface</b>	Phase cut DIM or DALI or Casambi
<b>IP rating</b>	IP20
<b>Luminaire housing</b>	aluminum powder coated black or white
<b>Ambient temperature</b>	-25° - +45°
<b>Converter</b>	Overload protection Overtemperature protection Short-circuit protection

<b>Options</b>	Duo Triple Quadruple Quadruple square - application
<b>Reflector</b>	Black high gloss Silver high gloss Chrome White Gold Black matt

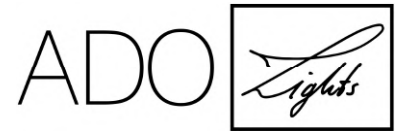