





| | |
|-------------------------|--|
| Material | Aluminium |
| Light Source | RGBW LED |
| Colour Range | CCT: 2200 - 15000K, PLUS/MINUS GREEN, HUE/SATURATION, DIRECT RGBW |
| CRI | Typical 95 |
| TLCI | Typical 95 |
| Beam Angle | 20° (Half Peak Angle) |
| Tilt Angle | 170° (Up), 80° (Down) |
| Rigging | 3/8" Threaded Insert. 4x rope rigging/safety points. Kino Flo Twist On Style Mount Plate |
| Yoke | Removable (Quick Release System) |
| Filter Rails | 2 Filter Rails for Secondary Lenses and Gels |
| User interface | High Precision Digital Rotary Encoder, 4 Button Keypad, Graphic LCD Display |
| Control | On-Board Interface, DMX-512 with Optional Adapter Cable, Optional Wired Remote Control |
| Dimming | 0-100% with High Resolution, Super-Smooth Low End Mode |
| High Speed Capability | Over 5000fps Flicker Free in High Speed Mode |
| Synchronization | Sync Input for Triggering and Syncing to Camera Shutter |
| Max Ambient Temperature | 40°C |
| Cooling | Passive - No Fans |
| Estimated LED Lifespan | 50,000hrs (L70) |
| Input (Fixture) | 10-32V DC, Max 8A (80W) |
| Input (Power Supply) | 100-240V AC, 50-60Hz, Max 1.3A |
| Protection Class | IP65 |
| Weight | 3.4kg / 7.5lb (Excluding Yoke) 4.2kg / 9.3lb (Including Yoke) |
| Dimensions | 223 x 207 x 108mm / 8.7" x 8.1" x 4.3" (Excluding Yoke) 300 x 331 x 108mm / 11.8" x 13.0" x 4.3" (Including Yoke) |
| Warranty | 5 years on Fixtures, 12 months on Accessories |
| Certifications | CE, FCC, C-Tick |

CRI/TLCI / PHOTOMETRICS

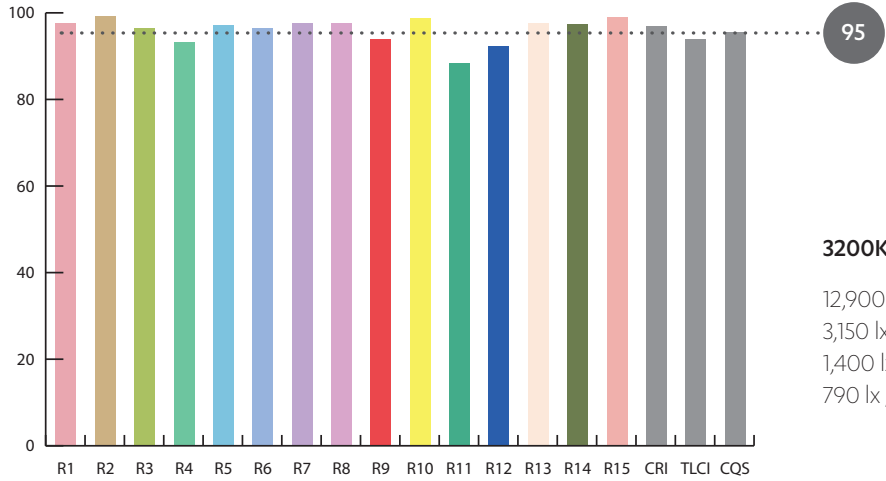

3200K:

12,900 lx / 1,200 fc @ 1m / 3.3ft
 3,150 lx / 290 fc @ 2m / 6.6ft
 1,400 lx / 130 fc @ 3m / 9.8ft
 790 lx / 70 fc @ 4m / 13.1ft

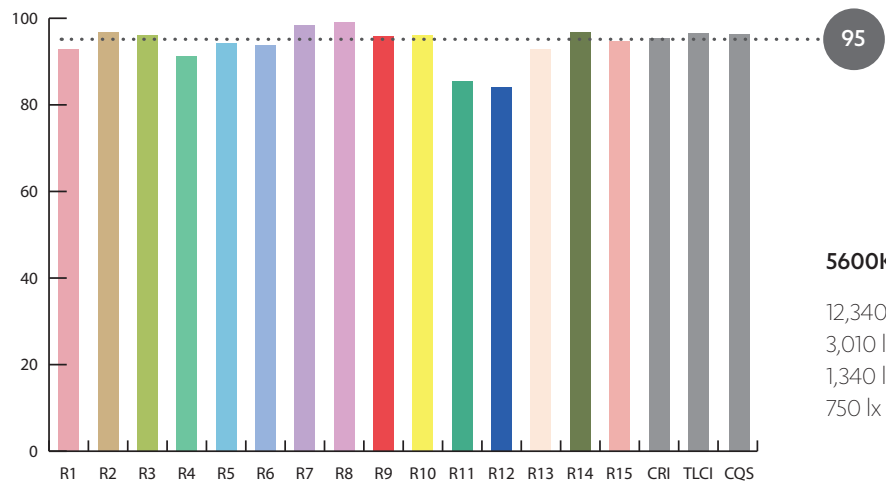

5600K:

12,340 lx / 1,150 fc @ 1m / 3.3ft
 3,010 lx / 280fc @ 2m / 6.6ft
 1,340 lx / 120 fc @ 3m / 9.8ft
 750 lx / 70 fc @ 4m / 13.1ft



80W, rivalling the light output and punch of some 200W HMI Luminaires



Superb colour rendition with typical CRI of 95 from 2700K to 6500K



Full colour temp adjustment from 2,200K to 15,000K with Green/Magenta control



On board V-lock or Anton-Bauer battery adaptor available



Super Smooth Dimming featuring HRD low end dimming module and High speed mode



Gang control of lights using DMX or Y cables. No Dimmer board required!



Flicker-free dimming to over 5000fps in high speed mode



Full choice of light control devices – soft boxes, lenses, barn doors



Removable power supply via optional PSU mount



Create a bigger source using Multi-Yoke



DMX via Fly lead XLR connection



Water resistant design (IP65)