

A+

CUBE XL II WHITE 3000K

Impact resistant wall luminaire in cube-shaped timeless design for illumination of larger facades and entrances. Big brother in the Cube family. Easily installed and ready for direct connection to 230V. Simple installation thanks to separate rear element and push-in, loop-in, loop-out terminal block. Spacers for surface-mounted cable routing included. IP65 rating and durable powder coating for tough environments. Integrated driver with separate adjustable light level via DIP-switch for up or downlight, 60% and 100%.

DESCRIPTION

GTIN:	7392971135755
Item Name:	Cube XL II White 3000K
Warranty:	5 years

LIGHT TECHNICAL DATA

Light Source:	LED
Light Source Included (type):	LED not exchangeable
LED Colour:	Warm White
Colour Temperature (K):	3000
Colour Rendering Index (Ra):	>80
Colour Consistency (SDCM):	3
Luminous Intensity (cd):	617
Luminaire Lumen (lm):	1890
Beam Angle (°):	80
Light sharing:	Symmetric
Light Outlet:	Direct
Number of Lamps (pcs):	2
Number of LED (pcs):	2
Life Time:	L70 75 000h Ta 25°C
Nominal Life Time (h):	75000
Life Time Driver:	50 000h/10%

TECHNICAL DATA

Adjustable:	No
Voltage (type):	AC
Voltage Interval (V):	220...240
Voltage Nominal (V):	230
Line Frequency (Hz):	50
Voltage Forward (Vf):	31
Power LED (W):	21,6
Power Luminaire (W):	25
System Power (W):	25
Efficiency Luminaire (lm/W):	76
Efficiency System (lm/W):	76
Energy Efficiency Class:	A+

OPERATION AND CONNECTION


Driver Included:	Yes
Driver Model:	Constant Current
Driver Type:	Built-in
Connection (type):	Quick Terminal
Connection (mm2):	3x0,5-2,5
Through Wiring:	Yes
Strain Relief:	No
Operating Temperature:	-20...+50
Max. Tc (°C):	80
Dimmable:	No
Type of Dimming:	DIP 60% 100%
Fuse B10 (pcs):	12
Fuse B16 (pcs):	21
Fuse C10 (pcs):	14
Fuse C16 (pcs):	23

COLOR AND MATERIAL

Material:	Aluminium
Color:	White
Color Code (RAL):	9016
Halogen free:	No

MEASUREMENT AND INSTALLATION

Operation Environment:	Indoor / wet locations, Outdoor
IP Degree of Protection:	65
Installation:	Surface mounted
Mounting Installation:	Screw Mounting
Approval Marks:	CE
Impact Strength:	IK10
Protection Class:	I
Width (mm):	150
Height (mm):	150
Depth (mm):	150
Weight (kg):	3,13

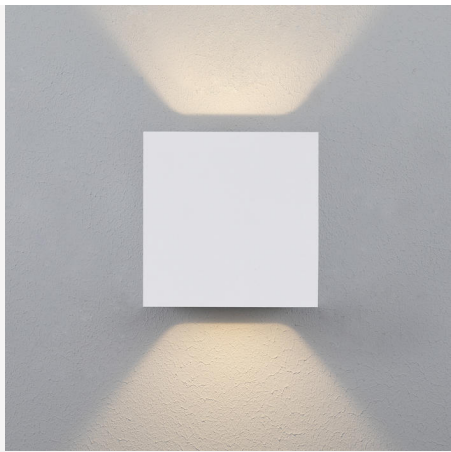

This luminaire contains built-in LED lamps.

The lamps cannot be changed in the luminaire.

hidealite Cube XL II 874/2012

A++
A+
A
C
D
E
F

LED

