



A+

## LEVEL MAXI TUBE DALI 3000K

Efficient and glare-free LED downlight for surface mounting with unique toolless raising and lowering function. Perfect in corridors, entrances, shops and other public areas that require very much light. Replaces 2x26W compact fluorescent tubes with >50% energy saving. Separate rear element with push-in, loop-in, loop-out terminal block simplifies installation. Complete with integrated driver for On/Off or DALI type of dimming and spacers for surface mounted cable routing. Can be complemented with Suspension Kit and Front Ring with protective glass.

### DESCRIPTION

<b>GTIN:</b>	7392971129600
<b>Item Name:</b>	Level Maxi Tube DALI 3000K
<b>Warranty:</b>	5 years

### LIGHT TECHNICAL DATA

<b>Light Source:</b>	LED
<b>Light Source Included (type):</b>	LED not exchangeable
<b>LED Colour:</b>	Warm White
<b>Colour Temperature (K):</b>	3000
<b>Colour Rendering Index (Ra):</b>	>80
<b>Colour Consistency (SDCM):</b>	3
<b>Luminous Intensity (cd):</b>	2250
<b>Luminaire Lumen (lm):</b>	2450
<b>Beam Angle (°):</b>	65
<b>Light sharing:</b>	Symmetric
<b>Light Outlet:</b>	Direct
<b>Number of Lamps (pcs):</b>	1
<b>Number of LED (pcs):</b>	1
<b>Life Time:</b>	L80 100 000h Ta 25°C
<b>Nominal Life Time (h):</b>	100000
<b>Lumen maintenance 50 000h:</b>	L92
<b>Lumen maintenance 100 000h:</b>	L87
<b>LLMF @ 50 000h:</b>	0,92
<b>LLMF @ 100 000h:</b>	0,87
<b>Life Time Driver:</b>	50 000h/10%

## TECHNICAL DATA

Adjustable:	No
Voltage (type):	AC
Voltage Interval (V):	220...240
Voltage Nominal (V):	230
Line Frequency (Hz):	50
Power Luminaire (W):	27
System Power (W):	27
Efficiency Luminaire (lm/W):	91
Efficiency System (lm/W):	91
Energy Efficiency Class:	A+

## OPERATION AND CONNECTION




Driver Included:	Yes
Driver Model:	Constant Current
Driver Type:	Built-in
Connection (type):	Quick Terminal
Through Wiring:	Yes
Strain Relief:	Yes
Operating Temperature:	-10...+45
Dimmable:	Yes
Type of Dimming:	DALI
Memory Function Power Failure:	No
Fuse B10 (pcs):	21
Fuse B16 (pcs):	33
Fuse C10 (pcs):	35
Fuse C16 (pcs):	57

## COLOR AND MATERIAL

Material:	Extruded, Aluminium
Color:	White
Color Code (RAL):	9016

## MEASUREMENT AND INSTALLATION

Operation Environment:	Indoor / dry locations
IP Degree of Protection:	20
Installation:	Surface mounted, Pendant
Mounting Installation:	Screw Mounting
Approval Marks:	CE, SELV
Protection Class:	I
Height (mm):	184
Diameter (mm):	165
Weight (kg):	2,4
Height Exterior Part (mm):	184

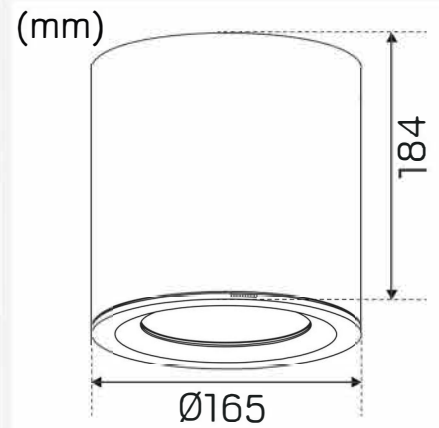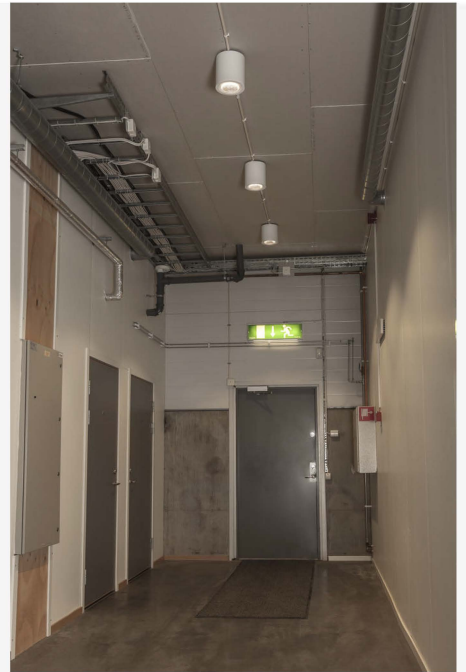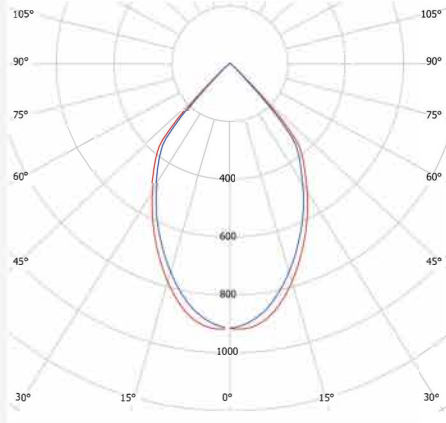

This luminaire contains built-in LED lamps.

The lamps cannot be changed in the luminaire.

hidealite Level! Maxi Tube 874/2012

A++  
A+  
A  
B  
C  
D  
E

LED