



A

## MILO PILLAR GREY 3000K

Cylindrical bollard, IP65 rating. This fitting provides striking, glare-free and omnidirectional light distribution with a 150° spread for lighting gardens, pathways and wooden decks. Aluminium housing, anodised and powder coated to withstand Nordic weather conditions. Integrated driver with separate loop-in, loop-out terminal block for easy 230V connection. Comes with complete kit for embedding in concrete.

### DESCRIPTION

<b>GTIN:</b>	7392971129174
<b>Item Name:</b>	Milo Pillar Grey 3000K
<b>Warranty:</b>	5 years

### LIGHT TECHNICAL DATA

<b>Light Source:</b>	LED
<b>Light Source Included (type):</b>	LED not exchangeable
<b>LED Colour:</b>	Warm White
<b>Colour Temperature (K):</b>	3000
<b>Colour Rendering Index (Ra):</b>	>80
<b>Colour Consistency (SDCM):</b>	3
<b>Luminous Intensity (cd):</b>	75
<b>Luminaire Lumen (lm):</b>	290
<b>Beam Angle (°):</b>	150
<b>Light sharing:</b>	Symmetric
<b>Number of Lamps (pcs):</b>	1
<b>Number of LED (pcs):</b>	1
<b>Life Time:</b>	L70 50 000h Ta 25°C
<b>Nominal Life Time (h):</b>	50000
<b>Life Time Driver:</b>	50 000h/10%

## TECHNICAL DATA

Adjustable:	No
Voltage (type):	AC
Voltage Interval (V):	220...240
Voltage Nominal (V):	230
Line Frequency (Hz):	50, 60
Power LED (W):	7
Power Luminaire (W):	7,7
System Power (W):	7,7
Efficiency Luminaire (lm/W):	38
Efficiency System (lm/W):	38
Energy Efficiency Class:	A



## OPERATION AND CONNECTION

Driver Included:	Yes
Driver Model:	Constant Current
Driver Type:	Built-in
Connection (type):	Quick Terminal
Connection (mm2):	3x0,75-2,5
Through Wiring:	Yes
Strain Relief:	Yes
Operating Temperature:	-20...+40
Max. Tc (°C):	75
Dimmable:	No
Type of Dimming:	OnOff



## COLOR AND MATERIAL


Material:	Aluminium
Color:	Grey
Color Code (RAL):	7042
Halogen free:	No

## MEASUREMENT AND INSTALLATION

Operation Environment:	Indoor / wet locations, Outdoor
IP Degree of Protection:	65
Installation:	Surface mounted
Mounting Installation:	Screw Mounting
Approval Marks:	CE
Impact Strength:	IK08
Protection Class:	I
Height (mm):	750
Diameter (mm):	150
Weight (kg):	2,5



(mm)

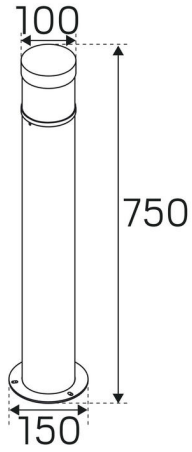

This LED luminaire contains built-in LED lamps.

The lamps cannot be changed in the luminaire.

hidealite Milo Pillar

874/2012

A+  
A+  
A  
B  
C  
D  
E

LED