



B

## WALLY 3000K WHITE

Wally is a discrete recessed wall fixture in white that creates sharp light patterns on the floor. For example, you can illuminate an indoor pathway or a stairway with one wall. Change appearance of your luminaire easily with the Wally Asymmetric front cover that gives an oval light pattern. Wally has a warm white LED colour of 3000K. Easily installed, adapted for mounting in an appliance box and connecting to a constant current of 700 mA. Comes with 1 m cable, mini connector and joint.

### DESCRIPTION

<b>GTIN:</b>	7392971126418
<b>Item Name:</b>	Wally 3000K White
<b>Warranty:</b>	5 years

### LIGHT TECHNICAL DATA

<b>Light Source:</b>	LED
<b>Light Source Included (type):</b>	LED not exchangeable
<b>LED Colour:</b>	Warm White
<b>Colour Temperature (K):</b>	3000
<b>Colour Rendering Index (Ra):</b>	>80
<b>Colour Consistency (SDCM):</b>	3
<b>Luminous Intensity (cd):</b>	45
<b>Luminaire Lumen (lm):</b>	50
<b>Beam Angle (°):</b>	60
<b>Life Time:</b>	L70 50 000h Ta 25°C
<b>Nominal Life Time (h):</b>	50000

### TECHNICAL DATA

<b>Power LED (W):</b>	2,5
<b>Power Luminaire (W):</b>	2,5
<b>Energy Efficiency Class:</b>	B

## OPERATION AND CONNECTION


Driver Model:	Constant Current
Connection (type):	Cable
Strain Relief:	Yes
Constant Current (mA):	700
Dimmable:	Yes

## COLOR AND MATERIAL


Material:	Aluminium
Color:	White
Color Code (RAL):	9016

## MEASUREMENT AND INSTALLATION

Operation Environment:	Indoor / damp locations
IP Degree of Protection:	21
Installation:	Built-in
Mounting Installation:	Screw Mounting
Ceiling Thickness Interval (mm):	3
Fire Safety Marks:	Not in insulation without protection cover
Approval Marks:	CE
Width (mm):	85
Height (mm):	85
Weight (kg):	0,13
Min. Built-in (mm):	Ø67x40
Height Recessed Part (mm):	33
Height Exterior Part (mm):	3

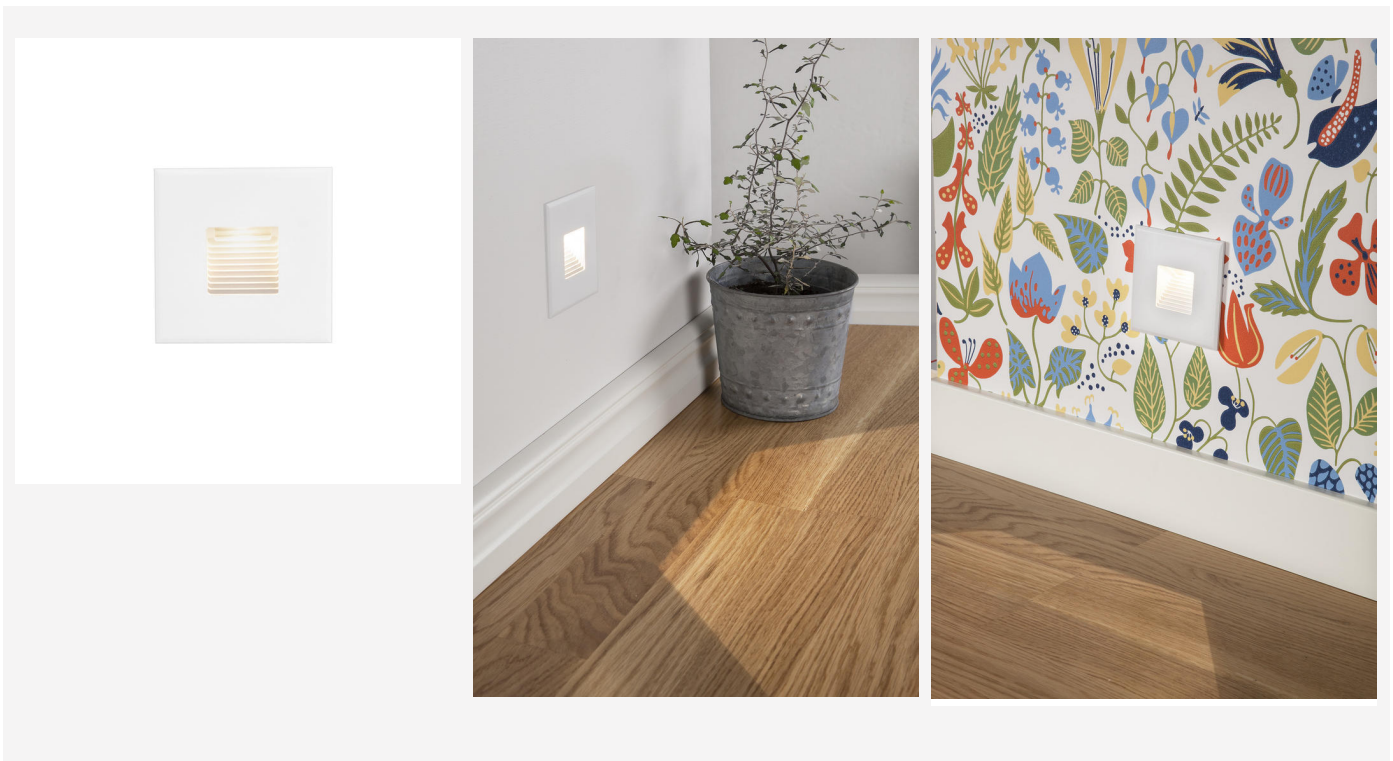



 This luminaire contains built-in LED lamps.

The lamps cannot be changed in this luminaire.

**hidealite** 7463864

**LED**

A++  
A+  
A  
B  
C  
D  
E

874/2012

