


MODEL - LITEMAT SPECTRUM 4, CINEMA/TELEVISION LED LIGHTING SYSTEM


LITEMAT SPECTRUM 4 is a lightweight LED lighting fixture system designed for cinema, television, and HD video. By providing evenly spaced, color-correct LEDs spread out over a large area, LiteMat creates soft light without requiring diffusion. The “soft-through-pixelization” method allows the unit to achieve bright light levels while remaining 0.9 in. (23 mm) thick in size and 7.4 lb (3.4 kg) in weight.

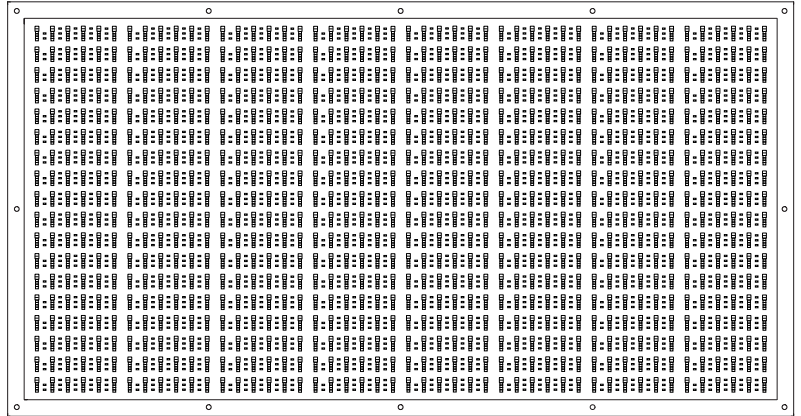


PARTS & ACCESSORIES

LiteMat Head:	LM-SPECTRUM-FOUR
LiteDimmer:	LD-SPECTRUM-DC200
LitePower Supplies	PS-24V-250W-F-PL4
LitePower Extensions	25': CA-PDX-EXT-25 50': CA-PDX-EXT-50 100': CA-PDX-EXT-100
LiteMount:	LMA-LITEMOUNT LMA-LITEMOUNT-XL LMA-LITEMOUNT-CONVI LMA-MOUNT-PISTOLGRIP
PolySkirt:	LMA-FOUR-SKIRT
Parasquare® Louver:	LMA-FOUR-LC-GRID
PolyGrid	15°: LMA-FOUR-LC-PG15 30°: LMA-FOUR-LC-PG30 60°: LMA-FOUR-LC-PG60 90°: LMA-FOUR-LC-PG90
Snapgrid	40°: LMA-FOUR-LC-SNAPGRID40
Diffusion	Quarter: LMA-FOUR-DIFF-Q Half: LMA-FOUR-DIFF-H Full: LMA-FOUR-DIFF-F
KitBag:	LMA-FOUR-BAG

0.9 in. (23 mm)




40 in. (1016 mm)

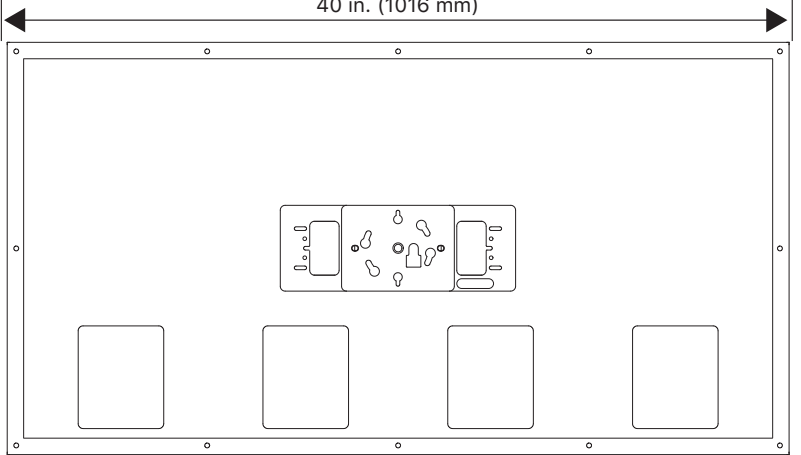


21 in. (533 mm)


ACCESSORIES



PolySkirt




Snapgrid




Parasquare®
Louver



PolyGrid



Diffusion



LiteMount

LITEMAT 1

LITEMAT 2

LITEMAT 2L

LITEMAT 3

LITEMAT 4

MECHANICAL AND ELECTRICAL SPECIFICATIONS (US/METRIC)

Height		Width		Depth		Weight		Voltage (VDC)	Current (Amps)	Power (Watts)	Total LED Qty
(in.)	(mm)	(in.)	(mm)	(in.)	(mm)	(lb)	(kg)				
21	533	40	1016	0.9	23	7.4	3.4	48	4.17	200	5184

PHOTOMETRIC SPECIFICATIONS (US/METRIC)

	Kelvin	CCT (K)	CRI	TLCI	Lumens	fc @ 24 in. (Lux @ 61 cm)	fc @ 36 in. (Lux @ 91 cm)	fc @ 48 in. (Lux @ 122 cm)	fc @ 60 in. (Lux @ 152 cm)	fc @ 72 in. (Lux @ 183 cm)	fc @ 84 in. (Lux @ 213 cm)	fc @ 96 in. (Lux @ 244 cm)	fc @ 108 in. (Lux @ 274 cm)
Tungsten	2600	95+	95+	13904	980 (10549)	436 (4688)	245 (2637)	157 (1688)	109 (1172)	80 (861)	61 (659)	48 (521)	
Mid	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	
Daylite	6000	95+	95+	16720	1176 (12658)	523 (5626)	294 (3165)	188 (2025)	131 (1406)	96 (1033)	74 (791)	58 (625)	


Values presented are averages of several measurements performed under lab conditions.

BEAM SPREAD (US/METRIC)


Beam Size H x W (in)	57 x 70	86 x 105	114 x 140	143 x 175	172 x 210	200 x 244	229 x 279	257 x 314
Distance (in)	24	36	48	60	72	84	96	108
Distance (cm)	61	91	122	152	183	213	244	274
Beam Size H x W (cm)	145 x 178	218 x 267	290 x 356	363 x 445	437 x 533	508 x 620	732 x 732	823 x 823

Measurements obtained using a LiteMat Spectrum 4 in horizontal position, controlled by a LiteDimmer Spectrum @ 100% intensity, and set at 2000K. Performed under lab conditions.


TUNGSTEN COLOR RENDERING INDEX

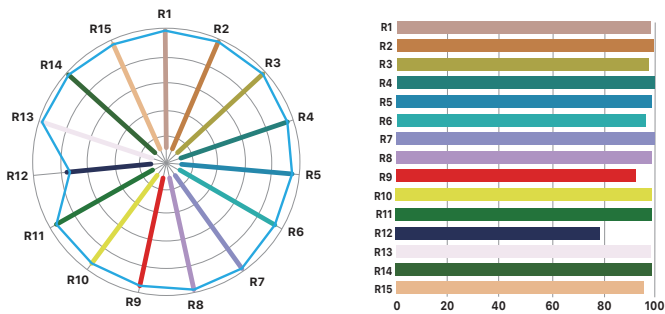


DAYLITE COLOR RENDERING INDEX

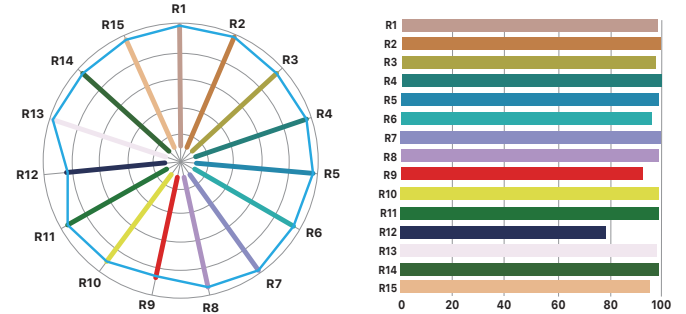

TUNGSTEN SPECTRAL GRAPH

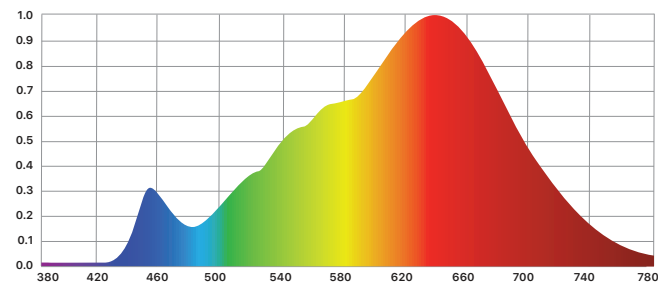

DAYLITE SPECTRAL GRAPH

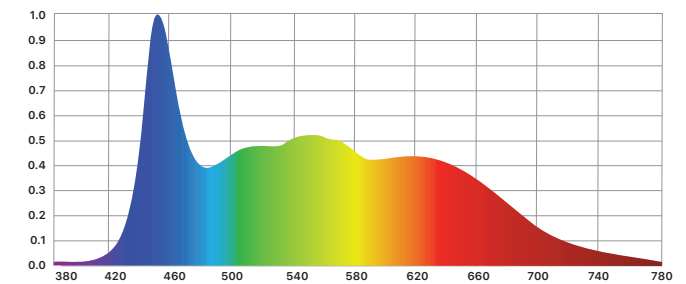

© 2019 LITEGEAR, INC. All rights reserved. LiteRibbon® and FauxFlo® are registered trademarks of LiteGear, Inc.
 © 2019 LITEGEAR, INC. All rights reserved. LiteGear™, LiteMat™, LiteDimmer™, LitePower™, LiteStix™, LiteNet™,
 E-Control™, FauxRes™, Chroma Correct™, and Vibrant Colors. Beautifully Saturated.™ are trademarks of LiteGear, Inc.
 Parasquare® is a registered trademark of Koller Craft Plastic Products, Inc.