

814 PRO





# UltrapanelPRO Dual Color 60 Soft

# Technical Data

|  |                                  |
|--|----------------------------------|
| Dimensions (cm)  | 691 x 465 x 121 mm               |
| Dimensions (in)  | 27.2 x 18.3 x 4.21 in            |
| Weight (kg)  | 9 kg                             |
| Weight (lb)  | 19.8 lb                          |
| CRI (Colour Rendering Index)   | 95                               |
| TLCI (Television Lighting Consistency Index)   | 96                               |
| Estimated LED lifetime (L80)   | 50,000 hours                     |
| Dimmer 0 - 100   | included                         |
| Dimming curves mode  | Linear, Exponential, Logarithmic |
| DMX module   | included                         |
| DMX (bit)  | 8 bit / 16 bit                   |
| Connection for 14.8 V battery with 1 standard XLR<br>4 pin connector (pin 1: negative / pin 4: positive) | included                         |
| Standard XLR 5 pin connectors to DMX console   | included                         |
| Watt consumption   | 440 W                            |
| Watt output (equivalent to tungsten)   | 8000 W                           |
| Firmware upgrades  | through USB port                 |
| Colour temperature   | 2800 K - 6500 K                  |
| Voltage AC   | 90 V - 240 V                     |
| Voltage DC   | 14.8 V                           |
| Light beam   | 120°                             |
| Frequency (input)  | 50 / 60 Hz                       |
| Compliance   | CE                               |
| Remote control   | Bluetooth Long Range / DMX / RDM |
| Ambient temperature  | Max: + 45°C / Min: - 10°C        |
| Power factor   | 0.9                              |

| Photometric data     | 6500 K | 5600 K | 3200 K |
|----------------------|--------|--------|--------|
| Distance             |        |        |        |
| Lux at 1 m - 3.2 ft  | 17300  | 16600  | 15100  |
| Lux at 2 m - 6.5 ft  | 4400   | 4280   | 4050   |
| Lux at 3 m - 9.8 ft  | 2150   | 2080   | 1950   |
| Lux at 4 m - 13.1 ft | 1320   | 1290   | 1180   |
| Lux at 5 m - 16.4 ft | 850    | 840    | 800    |

# Technical Drawing

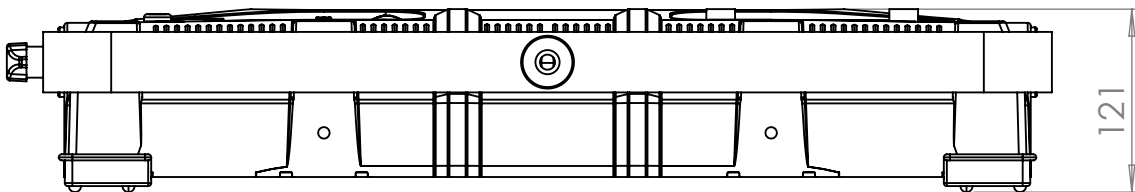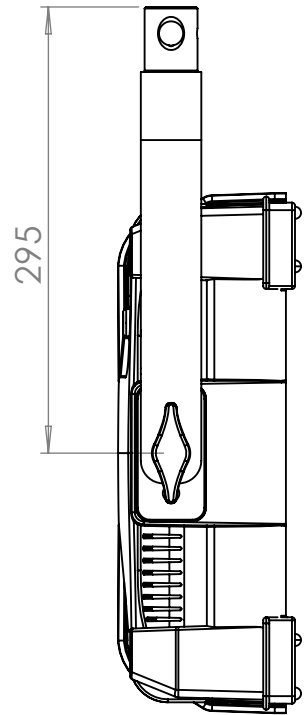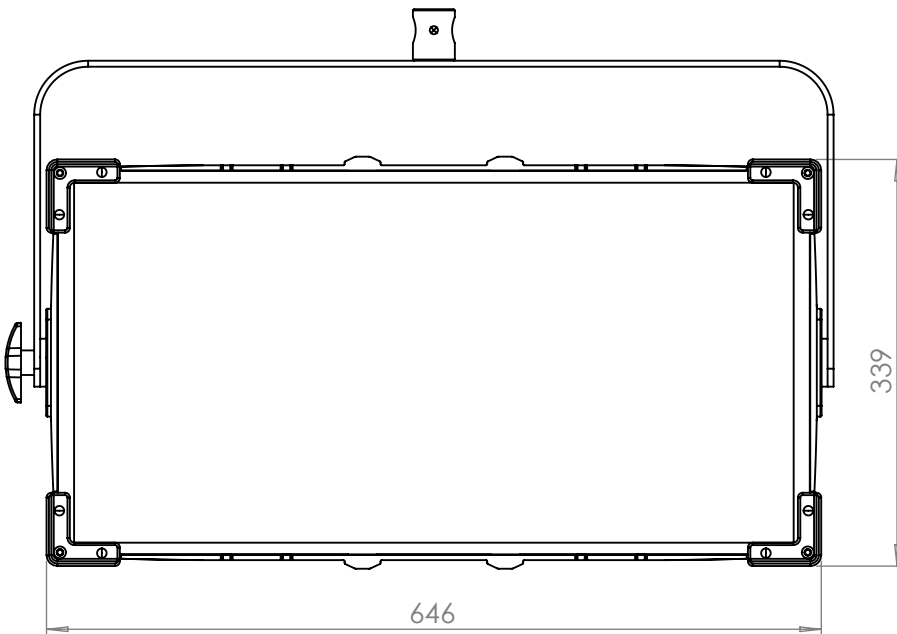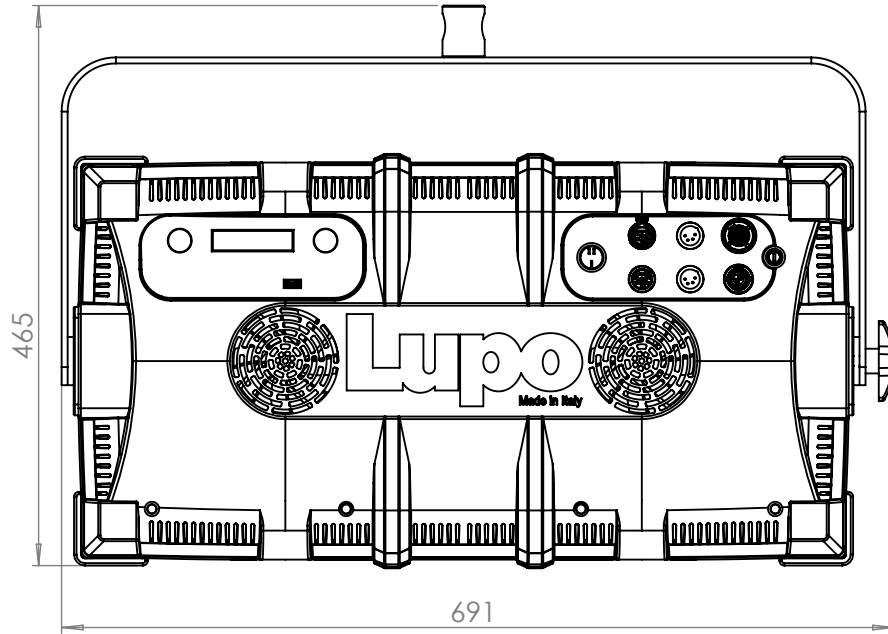

**Lupo**  
Made in Italy

 **FRAMELIGHT**

sales@framelight.com.au | framelight.com.au