



SLOT TRIMLESS MINI 82

CODE CONFIGURATOR

3000K CRI>90	2700K CRI>90
LED 1x4W 420lm 350mA	LED 1x4W 395lm 350mA
24° · 36°	
IP20 · IP44	
L82 x W110 x H30mm (visual length 52mm)	
✂ Cut-out: L87 x W110 x H35mm	
LED DRIVER NOT INCLUDED, SEE DRIVERLIST	



SLOT TRIMLESS 180

CODE CONFIGURATOR

3000K CRI>90	2700K CRI>90
LED 1x8W 840lm 350mA	LED 1x8W 790lm 350mA
24° · 36°	
IP20 · IP44	
L250 x W110 x H30mm (visual length 150mm)	
✂ Cut-out: L255 x W110 x H35mm	
LED DRIVER NOT INCLUDED, SEE DRIVERLIST	



SLOT TRIMLESS 430

CODE CONFIGURATOR


3000K CRI>90	2700K CRI>90
LED 2x8W 1680lm 350mA	LED 2x8W 1580lm 350mA
24° · 36°	
IP20 · IP44	
L500 x W110 x H30mm (visual length 400mm)	
✂ Cut-out: L505 x W110 x H35mm	
LED DRIVER NOT INCLUDED, SEE DRIVERLIST	



SLOT TRIMLESS 1500

CODE CONFIGURATOR

3000K CRI>90	2700K CRI>90
LED 4x8W 3360lm 350mA	LED 4x8W 3170lm 350mA
24° · 36°	
IP20 · IP44	
L1600 x W110 x H30mm (visual length 1500mm)	
✂ Cut-out: L1605 x W110 x H35mm	
LED DRIVER NOT INCLUDED, SEE DRIVERLIST	

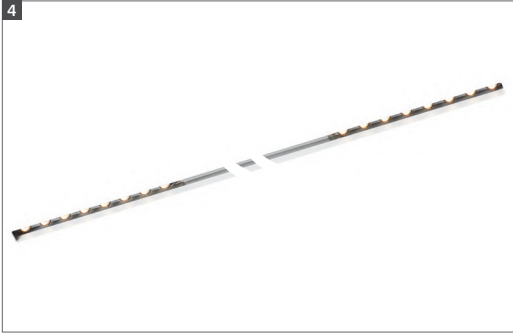

SLOT TRIMLESS 2000

CODE CONFIGURATOR

3000K CRI>90	2700K CRI>90
LED 6x8W 5040lm 350mA	LED 6x8W 4750lm 350mA
24° · 36°	
IP20 · IP44	
L2100 x W110 x H30mm (visual length 2000mm)	
✂ Cut-out: L2105 x W110 x H35mm	
LED DRIVER NOT INCLUDED, SEE DRIVERLIST	



SLOT TRIMLESS 3000

CODE CONFIGURATOR

3000K CRI>90	2700K CRI>90
LED 8x8W 6720lm 350mA	LED 8x8W 6330lm 350mA
24° · 36°	
IP20 · IP44	
L3100 x W110 x H30mm (visual length 3000mm)	
✂ Cut-out: L3105 x W110 x H35mm	
LED DRIVER NOT INCLUDED, SEE DRIVERLIST	



DRIVERLIST FOR SLOT TRIMLESS

Number of fixtures allowed per driver

		MAINS DIMMABLE:							
Product nr		WL DRIVER01*		WL DRIVER02*		WL DRIVER03*		WL DRIVER09*	
Dimensions (LxWxH) mm		102x38x21		113x44x28		99x39x23		38x27x21	
FIXTURE	mA	min	max	min	max	min	max	min	max
SLOT TRIMLESS 82	350	2	2	3	4	1	2	1	1
SLOT TRIMLESS 250	350	1	1	2	2	1	1	-	-
SLOT TRIMLESS 500	350	-	-	1	1	-	-	-	-

Product nr		WL DRIVER02-02*		WL DRIVER02-03*		WL DRIVER02-04*			
Dimensions (LxWxH) mm		113x44x28 (2pcs)		113x44x28 (3pcs)		113x44x28 (4pcs)			
FIXTURE	mA	min	max	min	max	min	max		
SLOT TRIMLESS 1600	350	1	1	-	-	-	-		
SLOT TRIMLESS 2100	350	-	-	1	1	-	-		
SLOT TRIMLESS 3100	350	-	-	-	-	1	1		

		1-10V DIMMABLE:							
Product nr		WL DRIVER05*		WL DRIVER06*					
Dimensions (LxWxH) mm		110x52x23.5		237x30x21					
FIXTURE	mA	min	max	min	max				
SLOT TRIMLESS 82	350	1	3	1	4				
SLOT TRIMLESS 250	350	1	1	1	2				
SLOT TRIMLESS 500	350	-	-	1	1				

Product nr		WL DRIVER06-02*		WL DRIVER06-03*		WL DRIVER06-04*			
Dimensions (LxWxH) mm		237x30x21 (2pcs)		237x30x21 (3pcs)		237x30x21 (4pcs)			
FIXTURE	mA	min	max	min	max	min	max		
SLOT TRIMLESS 1600	350	1	1	-	-	-	-		
SLOT TRIMLESS 2100	350	-	-	1	1	-	-		
SLOT TRIMLESS 3100	350	-	-	-	-	1	1		

		DALI DIMMABLE:							
Product nr		WL DRIVER07*		WL DRIVER08*					
Dimensions (LxWxH) mm		157x42x32		157x42x32					
FIXTURE	mA	min	max	min	max				
SLOT TRIMLESS 82	350	1	3	1	4				
SLOT TRIMLESS 250	350	1	1	1	2				
SLOT TRIMLESS 500	350	-	-	1	1				

Product nr		WL DRIVER08-02*		WL DRIVER08-03*		WL DRIVER08-04*			
Dimensions (LxWxH) mm		157x42x32 (2pcs)		157x42x32 (3pcs)		157x42x32 (4pcs)			
FIXTURE	mA	min	max	min	max	min	max		
SLOT TRIMLESS 1600	350	1	1	-	-	-	-		
SLOT TRIMLESS 2100	350	-	-	1	1	-	-		
SLOT TRIMLESS 3100	350	-	-	-	-	1	1		

(*) DRIVER NEEDS TO BE PLACED EXTERNAL
 (!!) WHEN MULTIPLE SPOTS ON 1 DRIVER: CONNECT SERIAL