


General

Location: Interior
 Class: CE (Class I)
 IP-rating: IP20
 Driver included: Yes
 Installation orientation: Only compatible with one of the Slot profiles + magnetic rail

Lamp included: Yes
 Dimmable: Yes
 Dimming method: Mains dimmable, 1-10V, DALI

Dimensions (mm): Ø: 38mm L: 75mm

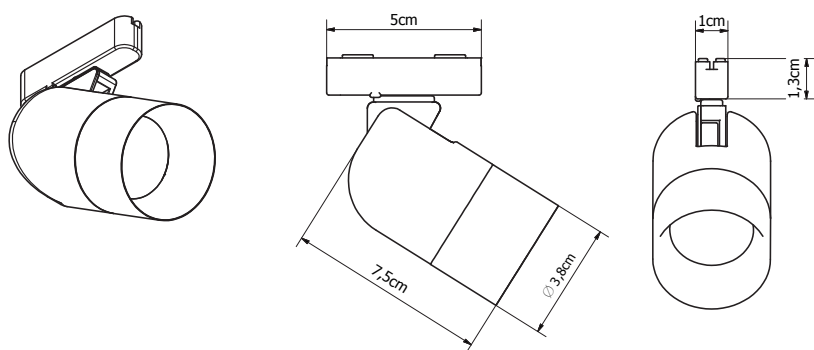

Models



CODE USE THE CODE CONFIGURATOR
Main material: Aluminium powder coated / anodised

White Line Dotsi 38mm **2700K**

2700K - CRI>97
 8W - 450lm - 24V



CODE USE THE CODE CONFIGURATOR
Main material: Aluminium powder coated / anodised

White Line Dotsi 38mm **3000K**

3000K - CRI>97
 8W - 480lm - 24V




CODE USE THE CODE CONFIGURATOR
Main material: Aluminium powder coated / anodised

White Line Dotsi 38mm **4000K**


4000K - CRI>97
 8W - 530lm - 24V

Summary dotsi basic parts

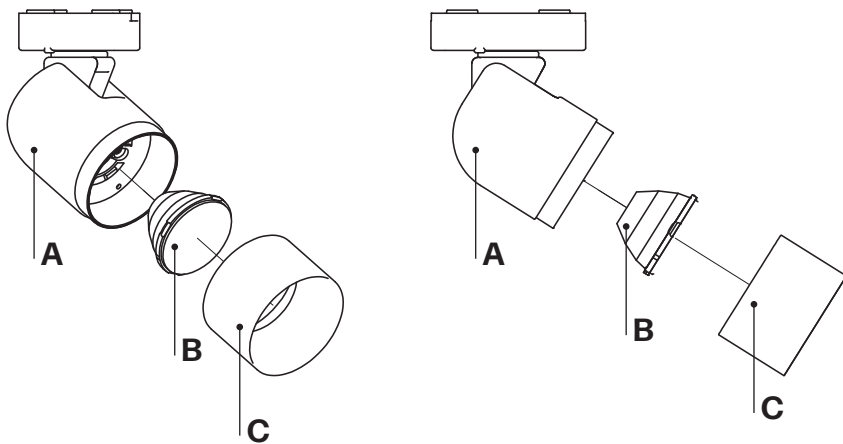

- A: Dotsi housing
- B: Dotsi lens
- C: Dotsi frontring

Frontrings

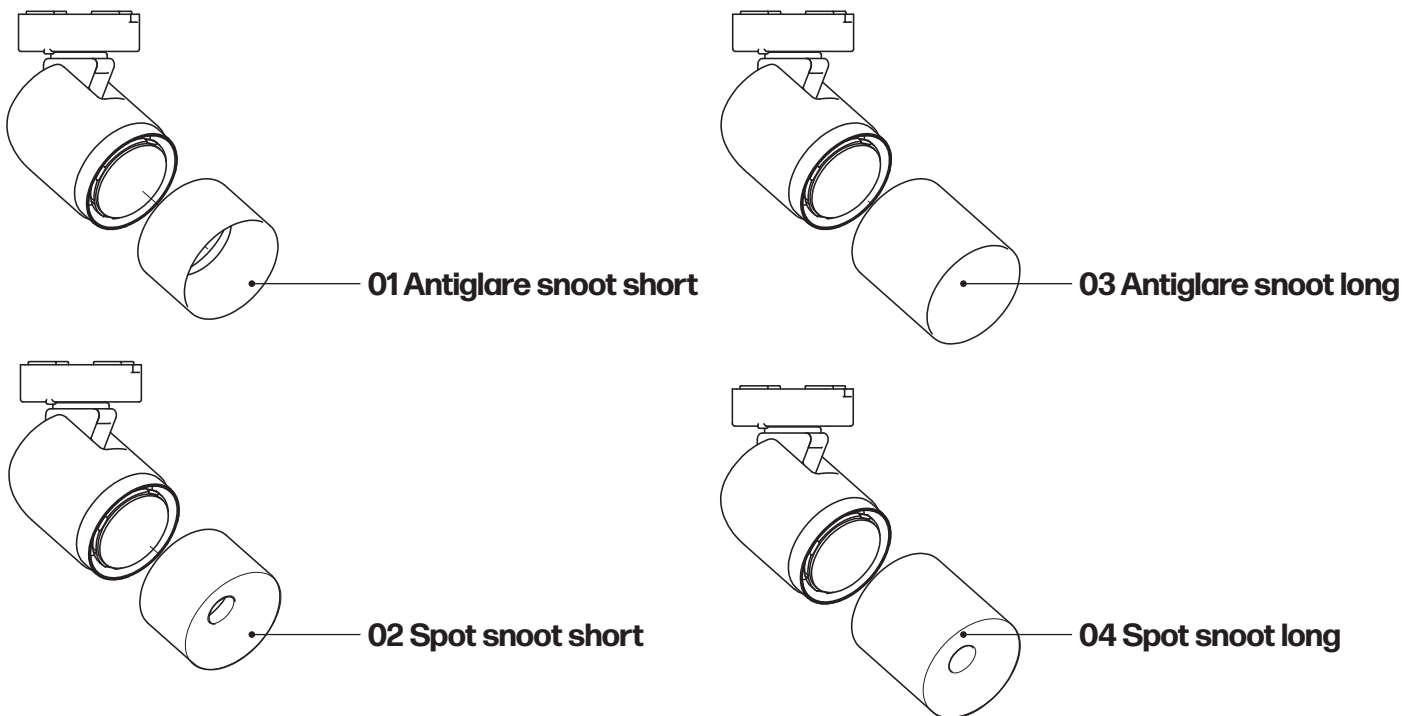

Required option

- WL DOTSI 01LENS01 Lens for Dotsi ø38mm - 15°
- WL DOTSI 01LENS02 Lens for Dotsi ø38mm - 20°
- WL DOTSI 01LENS03 Lens for Dotsi ø38mm - 30°
- WL DOTSI 01LENS04 Lens for Dotsi ø38mm - 40°
- WL DOTSI 01LENS05 Lens for Dotsi ø38mm - 45x20°
- WL DOTSI 01LENS06 Lens for Dotsi ø38mm - Wallwasher