

**EVO 1** IP54 



**1x1 COLOR-TUNABLE PANEL**

EVO 1 is a portable, weatherproof RGB+W+CW LED panel with a robust aluminum housing, designed specifically to endure the toughest working conditions in wet or dusty locations.

EVO 1 delivers full power light around one hour using a single 90Wh 14.4V battery.

EVO's back panel has a twist-on plate to quickly install the battery mount, AC power supply, or center ball mount.

**VE1CIP54** ORDER CODE

EVO 1 Color weatherproof LED panel + yoke

INCLUDES 1x EVO 1 Color LED panel IP54 with DC in XLR-3, 1x DMX in XLR-5, 1x Mini-USB, LumenRadio wireless DMX, VELVET WIFI Art-Net, 1x yoke with 28mm junior pin - 16mm baby receiver



**VE1CIP54NY** ORDER CODE





EVO 1 Color weatherproof LED panel without yoke

INCLUDES: 1x EVO 1 Color LED panel IP54 with DC in XLR-3, 1x DMX in XLR-5, 1x Mini-USB, LumenRadio wireless DMX, VELVET WIFI Art-Net

**PHOTOMETRICS** 5600K/ 3200K

1m	3500 lux	3m	450 lux	5m	83 lux
3ft	325 fc	10ft	41 fc	16ft	7.6 fc

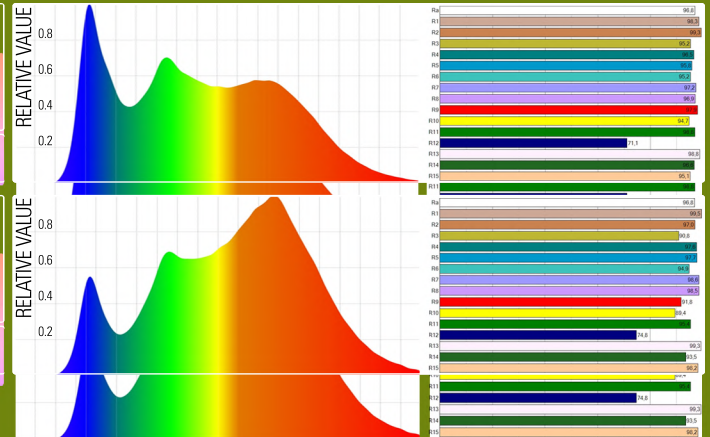

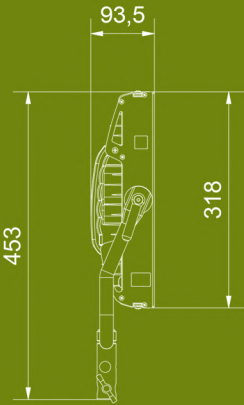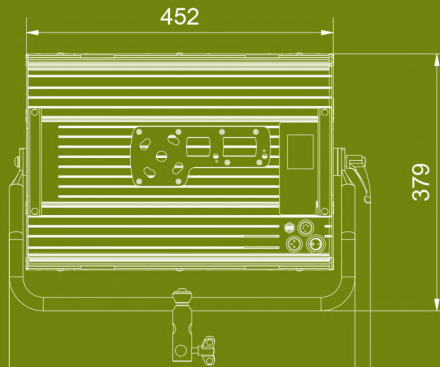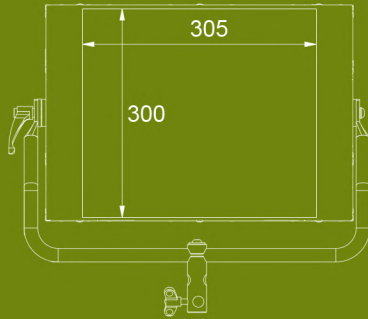

## TECHNICAL SPECIFICATIONS

BEAM ANGLE	115°.
COLOR TEMPERATURE	Continuously adjustable from 2500K to 10.000K.
LIGHT INTENSITY	Dimmable 0 to 100, smooth and flicker-free.
GREEN-MAGENTA	Continuously adjustable from full minusgreen to full plusgreen.
COLOR SPECTRUM	Full color spectrum R+G+B+W+CW with hue, saturation, and base color temperature control.
CONTROL COLOR MODES	CCT, HSI+, GEL, RGB+W+CW and EFFECTS modes. Adjustments are laid over a base white light and can be transferred from one mode to another.
CONTROL	Onboard control with color display, DMX/RDM through XLR5, LumenRadio wireless DMX/RDM, Art-Net, Wi-Fi, and the VELVET Goya mobile app.
CR INDEX & TLCI	Exceeds 95 CRI and TLCI.
DIMENSIONS	453 x 318 x 92mm / 17.8 x 12.5 x 3.6 inches.
PANEL WEIGHT	4.4 kg / 9.7 lbs.
PANEL + YOKE WEIGHT	4.9 kg / 10.8 lbs.
POWER 200W	0.9 Amps at 110 VAC
POWER SUPPLY	12-35V DC (XLR3). VLock/ Gold Mount battery plate 90-264V AC 50/60Hz
LED RATED LIFE	More than 50,000 hours.
COOLING	Silent and fan-free passive cooling.
PROTECTION	IP54 rain and dustproof, indoor or outdoor use.
CONSTRUCTION & FINISH	Fixture and yoke made of 100% black powdercoated extruded and sheet aluminum.
RIGGING OPTIONS	Aluminum yoke with 16mm baby receptacles combined with 28mm junior pin, center ball-head mount, multiple 1/4"-20 rigging points, double vertical yoke, pole-operated yoke.

