


**EVO 1 STUDIO**

**1x1 COLOR-TUNABLE PANEL**

EVO 1 Studio is a dustproof, maintenance-free RGB+W+CW LED panel, which runs completely silently, with no fans to service. It operates exclusively on AC power and includes in and out DMX XLR5 connectors for daisychaining, ethernet control through RJ-45 and wireless control through VELVET Art-Net Wi-Fi.

Its low weight, slim 92mm/3.6" profile and industry-leading power efficiency speed up installation.

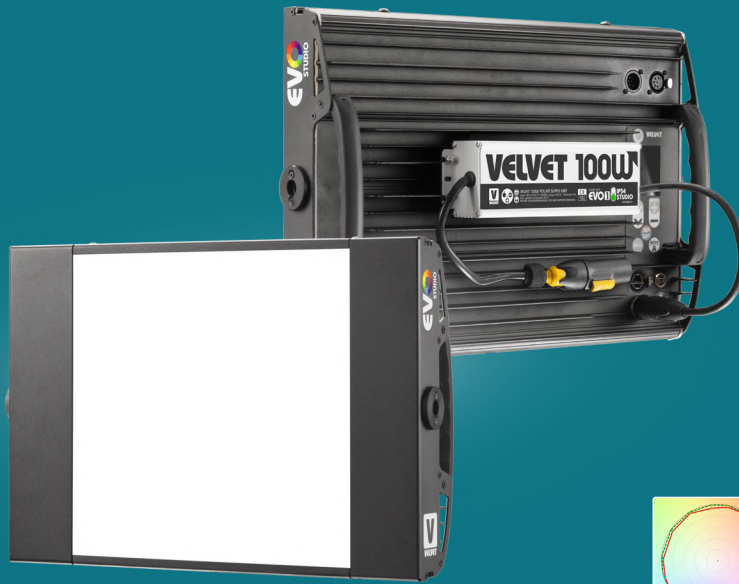

**VELCST**

ORDER CODE

EVO 1 Color STUDIO dustproof + integrated AC power supply + yoke

INCLUDES: 1x EVO 1 Color Studio LED panel IP51 with DC in XLR-3, integrated AC power supply, DMX in&out XLR-5, Mini-USB, VELVET WIFI Art-Net, 1x RJ45 Ethernet, 1x yoke with Euro28mm junior pin - 16mm baby receiver, 1x PowerCon TRUE1 power cable

**VELCSTNY**



ORDER CODE

EVO 1 Color STUDIO dustproof + integrated AC power supply NO Yoke

INCLUDES: 1x EVO 1 Color Studio LED panel IP51 with DC in XLR-3, integrated AC power supply, DMX in&out XLR-5, Mini-USB, VELVET WIFI ArtNet, 1x RJ45 Ethernet, 1x PowerCon TRUE1 power cable

**PHOTOMETRICS** 5600K/ 3200K

1m	3500 lux	3m	450 lux	5m	83 lux
3ft	325 fc	10ft	41 fc	16ft	7.6 fc

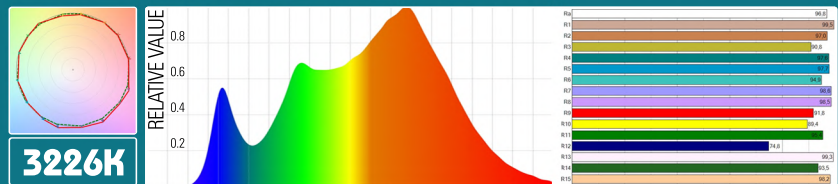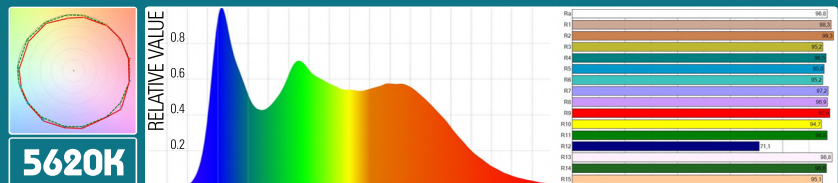

## TECHNICAL SPECIFICATIONS

BEAM ANGLE	115°
COLOR TEMPERATURE	Continuously adjustable from 2500K to 10.000K.
LIGHT INTENSITY	Dimmable from 0 to 100, smooth and flicker-free.
GREEN-MAGENTA	Continuously adjustable from full minusgreen to full plusgreen
COLOR SPECTRUM	Full color spectrum R+G+B+W+CW with hue, saturation, and base color temperature control.
CONTROL COLOR MODES	CCT, HSI+, , GEL, RGB+W+CW and EFFECTS modes. Adjustments are laid over a base white light and can be transferred from one mode to another.
CONTROL	Onboard control with color display, DMX/RDM through XLR5, Ethernet Art-Net through RJ-45, Art-Net, Wi-Fi and the VELVET GOYA mobile app.
CR INDEX & TLCI	Exceeds 95 CRI and TLCI.
DIMENSIONS	453 x 318 x 128mm / 17.8 x 12.5 x 5 inches.
PANEL WEIGHT	5.6 kg / 12.3 lb.
PANEL + YOKE WEIGHT	6.1 kg / 14.4 lb.
POWER 200W	0.9 Amps at 110 VAC.
POWER SUPPLY	90-264V AC 50/60Hz.
LED RATED LIFE	More than 50,000 hours.
COOLING	Silent, fan-free passive cooling.
PROTECTION	Indoor or outdoor IP51 dustproof protected.
CONSTRUCTION & FINISH	Fixture and yoke made of 100% black powdercoated extruded and sheet aluminum.
RIGGING OPTIONS	Aluminum yoke with 16mm baby receptacles combined with 28mm junior pin, multiple ¼"-20 rigging points, double vertical yoke, pole-operated yoke.

