

# EVO 2



## 2x1 COLOR-TUNABLE PANEL

EVO is an instrument made to extend your creative possibilities, to set up faster, and to remotely adjust on the fly on any location or any studio.

EVO offers everything you need from a professional color light: industry-leading output-to-weight and output-to-watt ratios, full output from standard 14.4V batteries, wireless control, solid reliability, silent fan-free operation and a weatherproof ergonomic housing.



### VE2CIP54 ORDER CODE

EVO 2 Color weatherproof LED panel + yoke

INCLUDES 1x EVO 2 Color LED panel IP54 with DC in XLR-3, 1x DMX in XLR-5, 1x Mini-USB, LumenRadio wireless DMX, VELVET WIFI Art-Net, 1x yoke with 28mm junior pin - 16mm baby receiver

### VE2CIP54NY ORDER CODE

EVO 2 Color weatherproof LED panel without yoke


INCLUDES: 1x EVO 2 Color LED panel IP54 with DC in XLR-3, 1x DMX in XLR-5, 1x Mini-USB, LumenRadio wireless DMX, VELVET WIFI Art-Net

## PHOTOMETRICS 5600K/ 3200K



|     |          |
|-----|----------|
| 1m  | 7000 lux |
| 3ft | 650 fc   |

|      |         |
|------|---------|
| 3m   | 900 lux |
| 10ft | 83 fc   |


|      |         |
|------|---------|
| 5m   | 167 lux |
| 16ft | 15.5 fc |




5620K

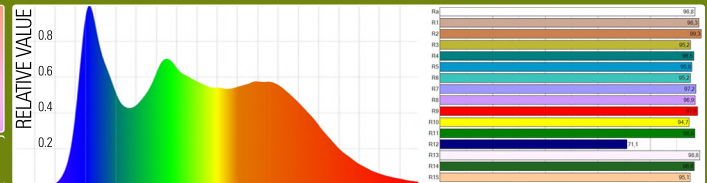

3226K

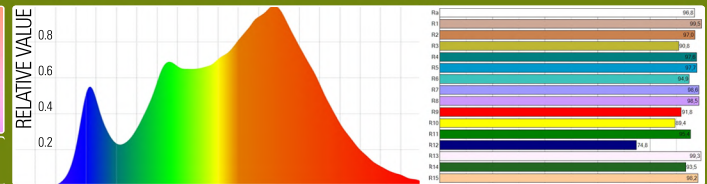

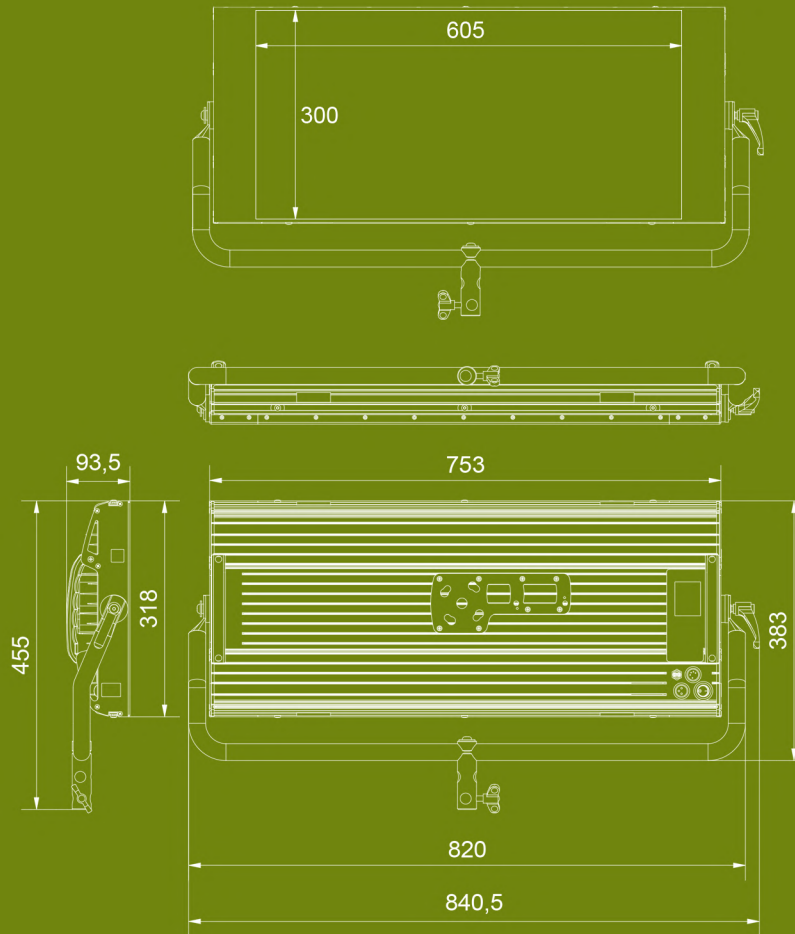

## TECHNICAL SPECIFICATIONS

|  |  |
|--|--|
| <b>BEAM ANGLE</b><br><b>COLOR TEMPERATURE</b><br><b>LIGHT INTENSITY</b><br><b>GREEN-MAGENTA</b><br><b>COLOR SPECTRUM</b> | 115°.<br>Continuously adjustable from 2500K to 10.000K.<br>Dimmable 0 to 1000, smooth and flicker-free.<br>Continuously adjustable from full minusgreen to full plusgreen<br>Full color spectrum R+G+B+W+CW with hue, saturation,<br>and base color temperature control. |
| <b>CONTROL COLOR MODES</b>   | CCT, HSI+, GEL, RGB+W+CW and EFFECTS modes.<br>Adjustments are laid over a base white light and can be<br>transferred from one mode to another.  |
| <b>CONTROL</b>   | Onboard control with color display, DMX/RDM through XLR5,<br>LumenRadio wireless DMX/RDM, Art-Net, Wi-Fi, and the<br>VELVET Goya mobile app.   |
| <b>CR INDEX &amp; TLCI</b>   | Exceeds 95 CRI and TLCI.   |
| <b>DIMENSIONS</b><br><b>PANEL WEIGHT</b><br><b>PANEL + YOKE WEIGHT</b>   | 753 x 318 x 92mm / 29.6 x 12.5 x 3.6 inches.<br>6.9 kg / 15.2 lbs.<br>7.6 kg / 16.7 lbs.   |
| <b>POWER 200W</b><br><b>POWER SUPPLY</b>   | 1.8 Amps at 110 VAC<br>24-35V DC (XLR3). VLock/ Gold Mount battery plate 90-264V<br>AC 50/60Hz   |
| <b>LED RATED LIFE</b><br><b>COOLING</b><br><b>PROTECTION</b>   | More than 50,000 hours.<br>Silent and fan-free passive cooling.<br>IP54 rain and dustproof, indoor or outdoor use.   |
| <b>CONSTRUCTION &amp; FINISH</b><br><b>RIGGING OPTIONS</b>   | Fixture and yoke made of 100% black powdercoated extruded<br>and sheet aluminum.<br>Aluminum yoke with 16mm baby receptacles combined with<br>28mm junior pin, center ball-head mount, multiple 1/4"-20<br>rigging points, double vertical yoke, pole-operated yoke.     |

