

EVO  **2x2** IP54 



2x2 COLOR-TUNABLE PANEL

EVO 2x2 is a weatherproof color panel with a 100% aluminum housing, designed specifically to endure the toughest working conditions in wet or dusty locations. It delivers the same full output powered by a 28V battery as it does from AC power and includes built-in wireless DMX LumenRadio, Art-Net, Wi-Fi and Bluetooth to remotely control through VELVET GOYA free App.

Unparalleled EVO color light quality emitted from an exclusive and portable 2x2 aperture.

VE2X2CIP54 ORDER CODE

EVO 2x2 Color weatherproof LED panel + yoke

INCLUDES 1x EVO 2x2 Color LED panel IP54 with DC in XLR-3, 1x DMX in XLR-5, 1x Mini-USB, LumenRadio wireless DMX, VELVET WIFI Art-Net, 1x yoke with 28mm junior pin



VE2X2CIP54NY ORDER CODE


EVO 2x2 Color weatherproof LED panel without yoke

INCLUDES: 1x EVO 2x2 Color LED panel IP54 with DC in XLR-3, 1x DMX in XLR-5, 1x Mini-USB, LumenRadio wireless DMX, VELVET WIFI Art-Net

PHOTOMETRICS 5600K/ 3200K

1m	13000 lux	3m	1800 lux	5m	335 lux
3ft	1200 fc	10ft	166 fc	16ft	31 fc

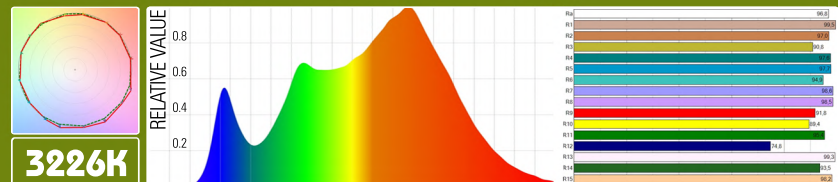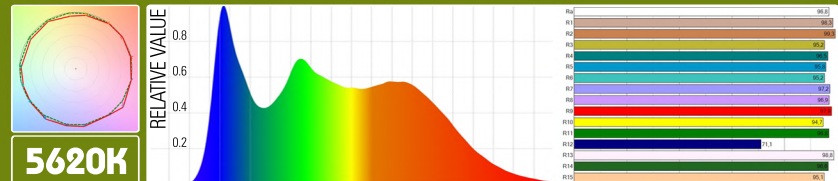

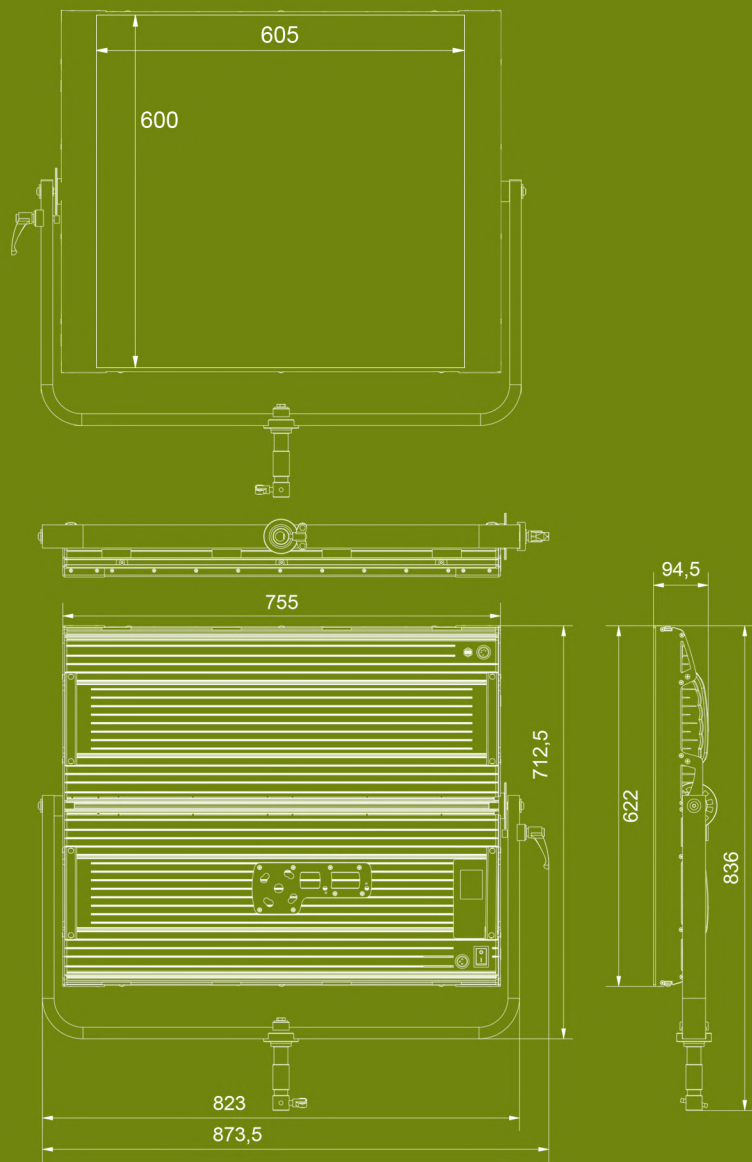

TECHNICAL SPECIFICATIONS

BEAM ANGLE	115°
COLOR TEMPERATURE	Continuously adjustable from 2500K to 10,000K.
LIGHT INTENSITY	Dimmable from 0 to 1000, smooth and flicker-free.
GREEN-MAGENTA	Continuously adjustable from full minusgreen to full plusgreen
COLOR SPECTRUM	Full color spectrum R+G+B+W+CW with hue, saturation, and base color temperature control.
CONTROL COLOR MODES	CCT, HSI+, GEL, RGB+W+CW and EFFECTS modes. <i>base Kelvin white light can be set combined with any color</i>
CONTROL	Onboard control with color display, DMX-RDM with XLR-5 in connector. DMX-RDM with LumenRadio CRMX Wi-Fi Art-Net, Bluetooth + Android and IOS Goya App <i>Bluetooth will be available on December'19 Firmware update</i>
CR INDEX & TLCI	Exceeds 95 CRI and TLCI.
DIMENSIONS	763 x 620 x 93mm / 30 x 24.4 x 3.6 inches.
PANEL WEIGHT	13 kg / 28.6 lb.
PANEL + YOKE WEIGHT	15.3 kg / 33.7 lb.
POWER 400W	3.6 Amps at 110 VAC.
POWER SUPPLY	28V DC (XLR3). 90-264V AC 50/60Hz.
LED RATED LIFE	More than 50,000 hours.
COOLING	Silent, fan-free passive cooling.
PROTECTION	IP54 rain and dustproof, indoor or outdoor use
CONSTRUCTION & FINISH	Fixture & yoke made of black powdercoated extruded and sheet aluminum
RIGGING OPTIONS	Aluminum yoke with 16mm baby receptacle combined with 28mm junior pin, center ball-head mount, multiple 1/4" - 20 rigging points, double vertical yoke, pole operated yoke.



Copyright 2019 VELVET. EVO 2x2 Weatherproof information (product code VE2X2CIP54 & VE2X2CIP54NY) is published by THELIGHT S.L.

Technical data and offerings are subject to change without notice. All rights reserved.

VELVET & EVO is a registered trademark by THELIGHT S.L. Carrer de la Cerdanya 11-A 08192 Sant Quirze del Vallès. BARCELONA, SPAIN. www.velvetlight.tv